


D04 CONN POINT	CONNECTION COMBINATION
01	FN-1b
02	FN-2b
03	FN-3b
04	ST-1b
05	ST-2b
06	ST-3b
07	FN-1a
08	FN-2a
09	FN-3a
10	ST-1a
11	ST-2a
12	ST-3a

INPUT VOLTAGE	L1	L2	L3	JOIN CONN. POINTS
LOW	(1,7)	(2,8)	(3,9)	
HIGH	(1)	(2)	(3)	(4,7) (5,8) (6,9)

NOTE:  
 1). INPUT POWER (PHASED A,B,C) CONNECTED AS STATED PRODUCES CWLE ROTATION. TO REVERSE DIRECTION, INTERCHANGE L2& L3.

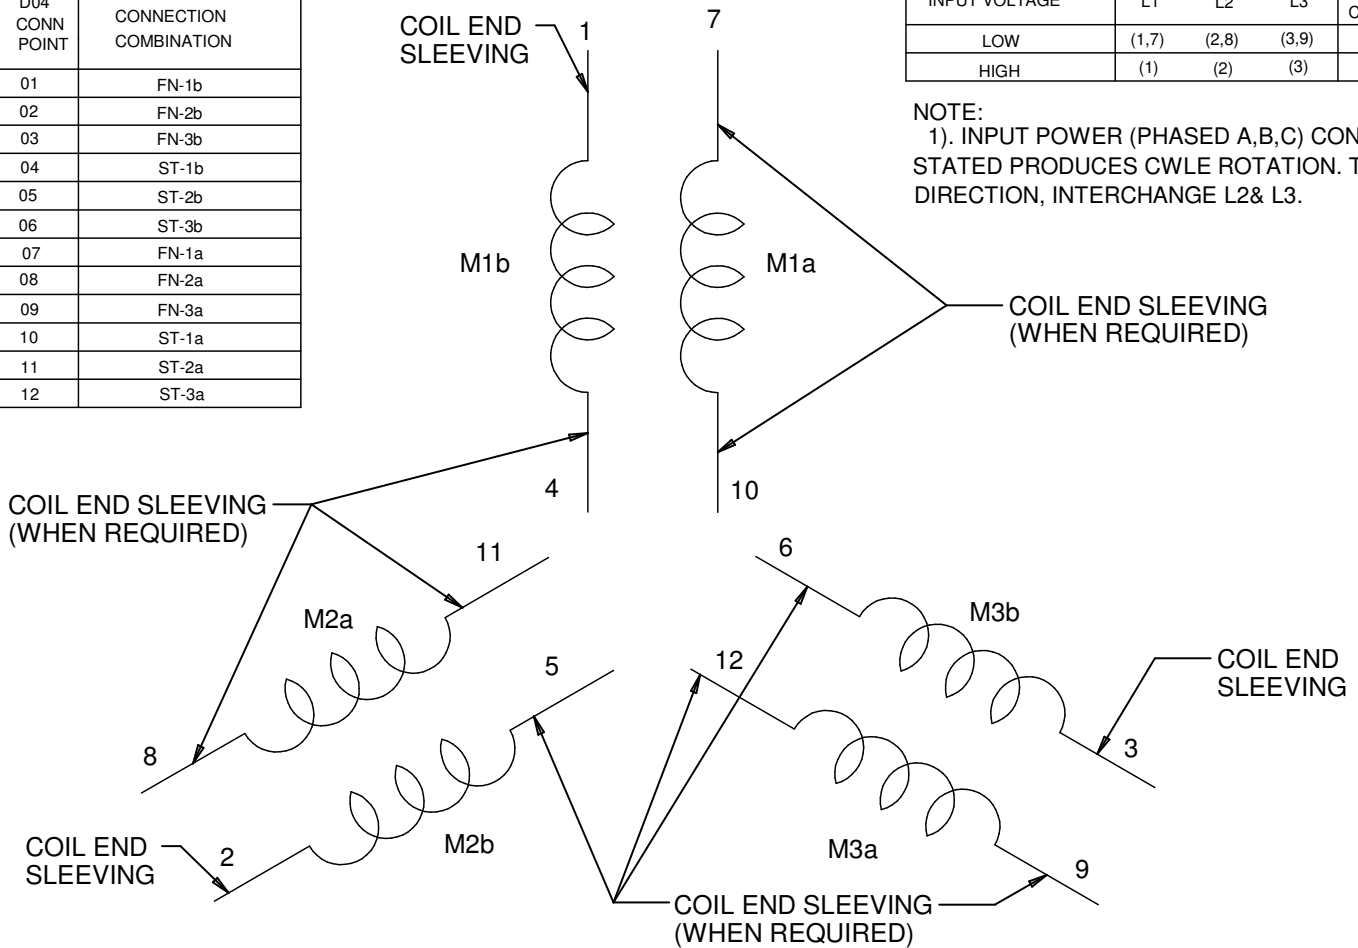

REVISION DESCRIPTION FOR: C8396-03	SCALE	NONE	UNITS	IN	TITLE	NIDEC MOTOR CORPORATION				
UPDATED TITLE BLOCK TO NIDEC.	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)				DIAGRAM OF CONNECTIONS					
MATERIAL:	INCHES		mm		ISSUED BY	B. ANDRADE	APPROVED BY	J. I. SALAZAR	REVISION DATE	24-SEP-13
---	±.015				CODE	D04	DWG NO.	295271	REV	C
MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED	ANGLES X°= ±1°								SHEET NUMBER	1 OF 1
									DWG SIZE	A

NIDEC CONFIDENTIAL  
 NIDEC MOTOR CORPORATION 24-Sep-13  
 NMCA (MAR-2011)

SOLIDEDGE