


EFFECTIVE:
11-MAY-11

SUPERSEDES:
20-JUN-01

HORIZONTAL MOTORS
OPEN DRIP PROOF
FRAME: 360TS
BASIC TYPE: R

PRINT:
07-2197

SHEET:
1 OF 1

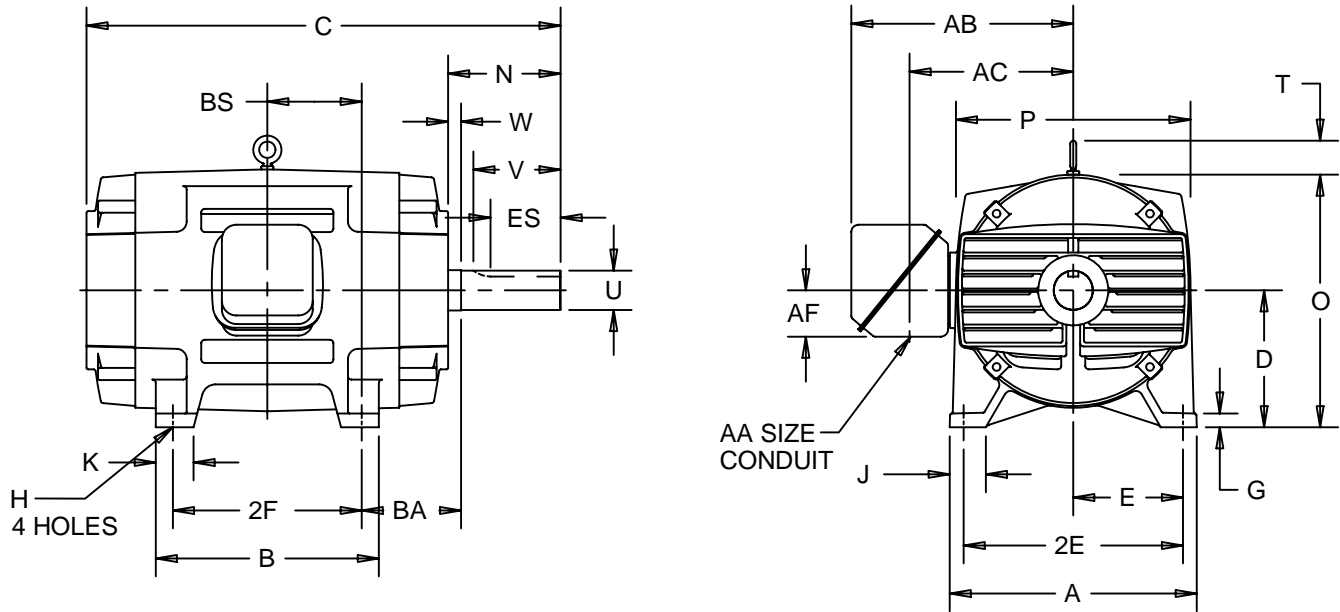

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	A	D ³ -.06	E	2E ³ ±.03	G	H ³ +.05	J	K	N	O	P ²
IN	17.63	9.00	7.00	14.00	1.00	.66	3.44	2.75	4.00	17.75	17.63
MM	448	229	178	356	25	17	87	70	102	451	448

UNITS	T	U ³ -.001	V MIN	W	AA	AB	AC	AF	BA	ES MIN	SQ KEY
IN	2.47	1.875	3.50	.25	3.00	16.38	12.09	3.38	5.88	2.03	.500
MM	63	47.63	89	6		416	307	86	149	52	12.70

FRAME	UNITS	B	C	BS	2F ³ ±.03
364TS	IN	13.75	26.56	5.63	11.25
	MM	349	675	143	286
365TS	IN	14.75	27.56	6.13	12.25
	MM	375	700	156	312

1: ALL ROUGH DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2: LARGEST MOTOR WIDTH.
3: TOLERANCE UNITS ARE IN INCHES ONLY.

4: STANDARD ASSEMBLY POSITION F-1 IS SHOWN. F-2 IS PROVIDED WHEN SPECIFIED. CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90° REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.

07-2197/B

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION



ISSUED BY
R. KING
APPROVED BY
K. POTTER

IHP_DP_NMCA (MAR-2011) SOLIDEDGE