EFFECTIVE:

20-JUL-11

SUPERSEDES: 22-FEB-11

VERTICAL MOTORS

WEATHER PROTECTED TYPE 1 FRAME: 324, 326TP, TPH


BASIC TYPE: RU

PRINT:

09-2291

SHEET:

1 OF 1

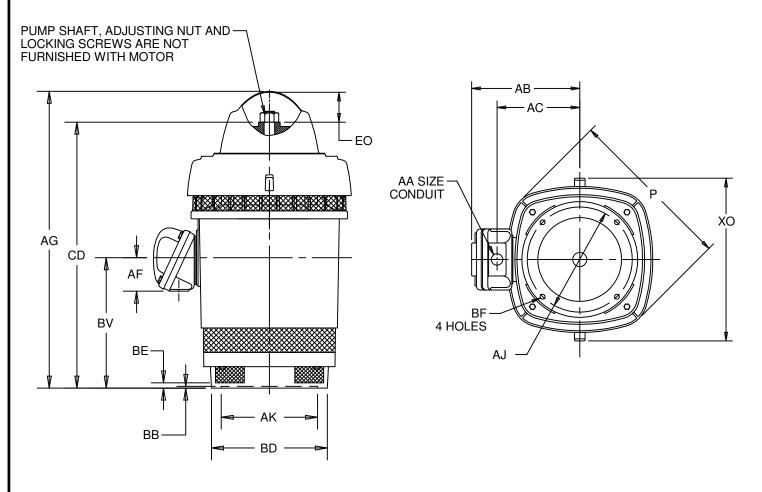

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	P ²	AG	BE	BV	CD	EO	хо
IN	19.06	33.06	.69	11.06	28.22	4.69	21.69
MM	484	840	18	281	717	119	551

	FRAME	UNITS	AJ	AK	BB MIN	BD MAX	BF
	324, 326TP	IN	14.750	13.500	.25	16.50	.69
		MM	374.65	342.90	6	419	18
	324,326TPH	IN	9.125	8.250	.19	12.00	.44
		MM	231.78	209.55	5	305	11

CONDUIT BOX MATERIAL	UNITS	AA	AB	AC	AF
STEEL	IN	3.00	15.84	11.56	3.38
SIEEL	MM		402	294	86
CAST IRON	IN	3 NPT	16.63	12.25	4.63
CASTINON	MM		422	311	118

- 1: ALL ROUGH DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
- 2: LARGEST MOTOR WIDTH.
- 2: CANDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90 DEGREES REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
 4: TOLERANCES SHOWN ARE IN INCHES ONLY.

TOLERANCES	8.250 AK	13.500 AK
FACE RUNOUT	.004 T.I.R.	.007 T.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET	.004 T.I.R.	.007 T.I.R.
TOLERANCE ON AK DIMENSION	+.003	+.005

