



Thank you for purchasing the world's best pet waste station. If you have questions or need assistance, please do not hesitate to contact us directly via email, phone, PawPail.com or through Amazon.

We respectfully ask for the opportunity to make any problems right before posting negative feedback about our products or our company. We are committed to 100% customer satisfaction with your shopping experience and we invite you to share your positive product reviews online to benefit our future customers.

With warmest regards to you and your pets,

Michael J. Harakal
Founder & CEO

Need to contact us?

844-PAWPAIL (729-7245)

info@pawpail.com

<http://www.pawpail.com>

PawPail Mounting System: User Guide

This document is provided to familiarize you with the components and use of the PawPail Mounting System. Please read this guide in its entirety before starting assembly. To begin, you will need:

Drill with 5/64" (1.98mm) drill bit

Small Phillips-Head screwdriver

Pliers, locking pliers (ex. VISE-GRIP), adjustable wrench or a 5.5mm hex nut driver

Appropriate screws, bolts or bands to secure the Mounting Bracket to your desired surface

Contents

8 ea. M3 (5.5mm) x 10mm screws

8 ea. M3 (5.5mm) hex nuts

1 ea. upper mounting hardware

1 ea. lower mounting hardware

1 PawPail mounting bracket




Assembly

Remove the basket from inside your PawPail and lay your PawPail on the ground, with the back of the PawPail facing you. Identify the 8 pre-formed pilot holes on the back of your PawPail.

Carefully drill through the PawPail container at each of the pilot hole sites using a drill with 5/64" (1.98mm) drill bit.


Pilot holes

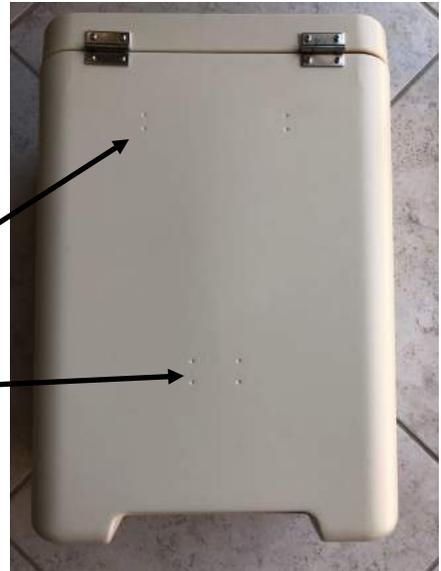

Align the upper and lower mounting hardware with the pilot holes as shown, and insert screws using the screwdriver.

Upper mounting hardware

Lower mounting hardware

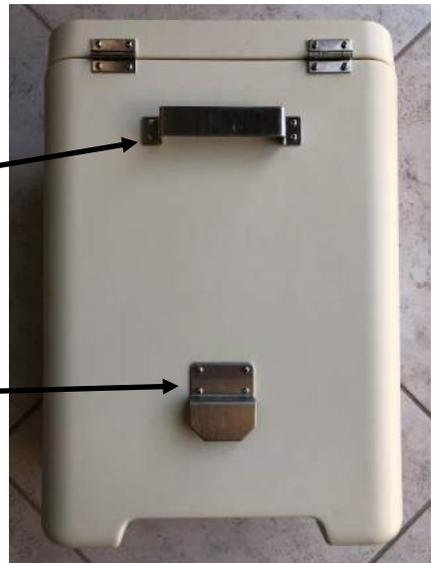

Next, flip your PawPail over, open it and secure the hex nuts to each screw location inside the container using either pliers, a wrench or an M3 (5.5mm) hex nut driver. It may be necessary to secure the screw head using the screw driver to prevent it from turning.



Affixing the Mounting Bracket

Select a stable surface in a well-ventilated area to affix the Mounting Bracket. The surface must be capable of supporting at least 25 lbs. of loading.

The Mounting Bracket can be secured with screws, bolts or bands/straps (not included).

The 2 Bolt Holes can accept bolts up to 21/64".

The 4 Screw Holes accept screws of up to 3/16".

The 2 Band Channels accept bands/straps up to 7/16" width.

Ensure the fasteners that you select are long enough to provide adequate fixation to your chosen mounting surface.

Final Assembly

Align the mounting hardware attached to your PawPail with the Mounting Bracket as shown and gently lower your PawPail onto both the lower mounting hardware and through the upper mounting hardware. It may be necessary to slightly depress the quick release tab.

To remove, depress the quick release tab while lifting your PawPail to disengage the Mounting System.

Securing your PawPail

The Locking Pin Holes on your PawPail Mounting System allow for cable locks to be used to prevent tampering or theft. If necessary. Simply pass a cable lock through one or both sides of the locking pin holes to secure your PawPail to the Mounting Bracket. We recommend the Master Lock 14" Cable Gun Lock 99KADSPT.

Product Name: PawPail Mounting System

Part Number: PP1030

PawPail

15275 Collier Blvd. #201-104

Naples, FL 34119

<https://www.pawpail.com>

