


Agent® Infinity Batons A30, A40, A50

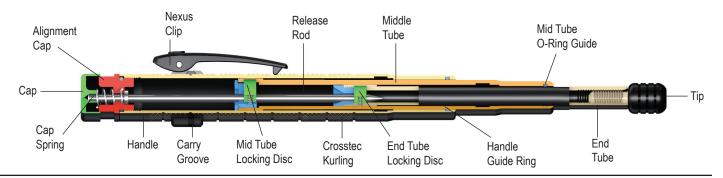

Background

Custom formulated tubing High strength Custom drawn

Sp

6.3"	16.00 cm
7.75"	19.69 cm
9.0"	22.86 cm
١	
11.8"	30.00 cm
15.75"	40.00 cm
19.63"	50.00 cm
t)	
6.4 ounces	181 grams
7.3 ounces	207 grams
8.3 ounces	235 grams
10.2 ounces	289 grams
13.2 ounces	374 grams
15.36 ounces	435 grams
.875"	2.22 cm
Talon Loc	
	6.3" 7.75" 9.0" 11.8" 15.75" 19.63" t) 6.4 ounces 7.3 ounces 8.3 ounces 10.2 ounces 13.2 ounces 15.36 ounces .875"







Attach the Nexus clip to your Agent® Infinity Baton by sliding the baton ring over the handle. Insert the snap-in locking band into a selected retention groove.

Steel Tubing 4140

40-45 RC

238,000 PSI tensile

Aluminum Tubing

7075 T6 87 RB 83,000 PSI tensile 73,000 PSI yield

Striking Surface

4140 steel Black Chrome plated

Middle Tube

Airweight 7075 T6 aluminum Hardcoat anodized Steel

Black Chrome plated

Handle

Airweight

7075 T6 aluminum Hardcoat anodized

Steel

4140

Black Chrome plated

Locking Discs

High carbon steel Heat treated

qiT

Carbon steel

Locking System

Internal locking grooves Opposing discs Spring expanded Rod retracted O-ring sealed

Grip

Cross hatched Spiral micro grooves Machined clip rings One-half inch on center Hardcoat anodized

Black Chrome plated O-ring sealed

Nexus Clip

Circumferential ring Polymer Replaceable Chrome plated torsion spring Locking band

Warranty

Infinity

Special Edition Cerakote







Retract your Agent Baton by depressing the end cap as pressure is exerted against the tip.



Duty Scabbards are low profile, snap-on carriers that swivel 180°.

