



XT DF



In certain operational settings a lower light output or strobe is desirable. The XT DF is designed for these specific activities. The XT is essentially eight lights in one. It provides four outputs from two power sources.

The XT DF is a micro USB rechargeable Dual Fuel light that may run on either an 18650 or two CR123A power cells. The rear mounted Intermittent • Locked • Constant light switch is independent of the output selector.


Rotating the bezel of the XT reveals a micro USB charge port and charge indicator. The battery indicator blinks red when charging. It turns solid green when fully charged. The light comes with a retractable charge cord.

The body of the XT has a unique foam grip. A replaceable pocket clip can be positioned lens up or lens down.

To set the programmable secondary level output of the XT, loosen the head. Cycle through the three settings (15, 300 lumens and Strobe) by pressing the activation button. Stop the cycle by turning off the light at the desired setting. Tighten the head of the XT to lock in the desired secondary level output.


Activation of the XT is simple and intuitive. The rear mounted switch button has a universal orientation. Pick up the light. On the constant setting, press the button once to activate the high setting of the XT. Press the button twice to activate the secondary level output. Press again to turn off the light. On the intermittent setting, press and hold the button once for the high setting. Press twice and hold for the secondary output setting.

The XT DF. A mission specific light built to the standards of ASP.



- Dual Fuel 18650 or CR123A
- Type III Hardcoat Anodizing
- Foamed Vinyl Grip
- Intermittent • Locked • Constant Switch
- Programmable Secondary Level Output (15, 300 Lumens or Strobe)

XT DF . . . Simply Brilliant

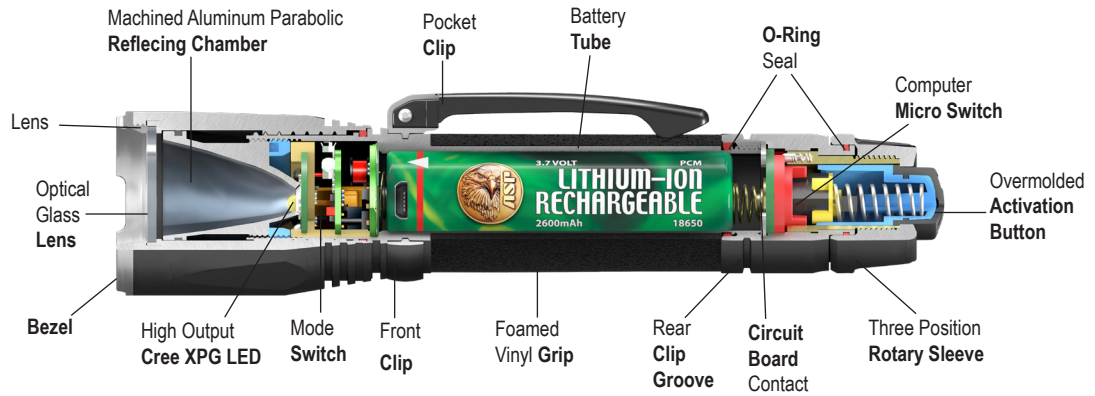

The XT DF can also be powered by two CR123A batteries.

Background

- Designed to professional law enforcement standards
- Aerospace aluminum construction
- Precision machined
- No sharp edges
- O-ring sealed for maximum water resistance
- Distinct profile
- Dual Fuel

Specifications

| | | |
|----------|-------------|-------------|
| Length | 6.25" | 158.7 mm |
| Diameter | 1.4" | 35.6 mm |
| Weight | 6.72 ounces | 190.5 grams |

(with batteries)

| | | |
|---------------|-----------------------------|-------|
| System | 3.7 volt | 18650 |
| High Output | 1000 lumens (ANSI Standard) | |
| High Run Time | 1 hour 45 minutes | |
| Second Output | Programmable Gray Button | |
| | 15 Lumens | |
| | 300 Lumens | |
| | Strobe | |

Body

- 6061 T6 high strength aluminum
- Matte black finish
- Type III hardcoat anodized
- Coated threads for durability
- Exterior and interior scratch and corrosion protection
- Foamed vinyl grip
- Front clip groove
- Rear clip groove



Charging Accessories are ASP designed to provide peak performance with a compact profile.



Pocket Clip

- Detachable
- Reversible

Power Cell

- Proprietary Rechargeable
- 18650 Lithium-ion battery
- 3.7 volt
- 2200 mAh
- Integral micro USB port
- PTC protected
- PCM protected
- Overcharge protection
- Fast discharge protection
- Short circuit protection
- Leak proof
- Vibration resistant
- Ten year shelf life
- Link case

Charge System

- Micro USB
- Flashing red charging
- Solid green fully charged

Battery Capacity Indicator

- Senses remaining power
- Rechargeable only
- Press activation button
- Green >50%
- Yellow 20% - 50%
- Red <20%



TLC Tactical Light cases protect and securely retain the XT.

Power Cell Tube

- Foamed vinyl grip
- O-ring sealed

Locking Switch

- Back mounted
- Quick and positive switch location under stress
- O-ring sealed activation button
- Locked (center)
- Constant on/off switch activation (right)
- Intermittent switch activation (left)
- O-ring sealed switch cover
- PC board positive circuit contact
- Sensitive and quiet switch activation
- Computer micro switch controlled
- Self-cleaning (no carbon buildup)
- Fail safe (backup) switch circuits
- Replaceable modular switch assemblies
- O-ring sealed connection to the light body

Reflector Assembly

- Parabolic
- Extremely durable
- Computer calculated ray traces
- Long distance penetrating beam
- Room illuminating halo
- Tempered optical glass lens
- Gasket sealed

LED Assembly

- Cree XPG LED
- Proprietary heat management
- Custom driver
- Smart chip technology
- Gasket sealed

Belt Case

- Injection molded

Travel Case

- Ballistic Weave
- Zippered


Warranty

- Limited Lifetime



The Pocket Clip may be attached to either the bezel or the switch end of an ASP light.

SWITCH ACTIVATION

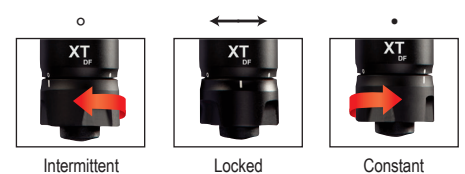

NOTE: Use only ASP 18650 Lithium-ion rechargeable batteries with XT DF lights.



"Simply Brilliant"

ASP, INC • Box 1794 • Appleton, WI 54912 • (920) 735-6242 • asp-usa.com