


Pulse . . . Simply Brilliant

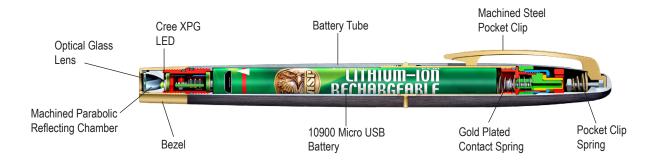

Background

Aerospace aluminum construction

Precision machined O-ring sealed Water resistant Distinctive profile

Specifications

146.05 mm Length 5.75" .530" 13.462 mm Diameter Weight 1.52 ounces 43.09 grams (with battery)

3 volt System High Level 250 lumens Run Time 1 hour 30 minutes Low Level 15 lumens Run Time 12 hours

Body

6061 T6 aluminum Brushed finish Architectural anodizing Gold accents

Pocket Clip

Steel Machined Heat treated Non fatiguing

Dual Fuel

10900 or AAA x2 Lithium-ion Micro USB rechargeable PCM protected Safety vent Ten year shelf life Leak proof Vibration resistant

Activation

Click Position location under stress O-ring sealed Positive circuit contact

Reflector Assembly

Machined aluminum Computer calculated parabola Metalized surface Long distance penetrating beam Room illuminating halo Tempered optical glass lens

Blue

Gray

Black

LED Assembly

Proprietary heat management Custom driver Smart chip technology

Pen Compliment

Matching body Matching finish Matching clip

Warranty

Limited lifetime







Retractable micro USB cords have reversible charge plugs.

