




# Sentry®




- Aluminum Frame
- Polymer Body
- Spiral Ring Grip
- Intermittent • Locked • Constant Switch
- Two Level Output

The Sentry® is part of the Duty Series of ASP illumination tools. It has an aluminum frame and a spiral ring grip. A clip groove is molded into the lens and switch end of each light. A replaceable Snap-Loc™ Clip snaps into either groove. Sentry lights are ideal in cold weather. Their polymer surface is more comfortable in the hand under adverse climate conditions.

The internal frame and parabolic reflector of each Sentry is aluminum. This alloy core improves conductivity and manages heat.

The Sentry is a two level light. There are no complex settings, elaborate activation codes or secret functions. A simple push of the rear mounted activation button provides brilliant intermittent or constant illumination. A double tap gives instant access to a 15 lumen second level.


Sentry lights are powered by two lithium CR123A batteries. The light can also be powered by an ASP 18650 rechargeable cell (sold separately). Sentry lights are compatible with the entire line of ASP performance products. Auxiliary TLC belt cases, Lithium power cells, Link™ battery holders and zippered storage carriers are available. The lights are strong, lightweight and brilliant. Polymer illumination tools, built to the quality standard of ASP.

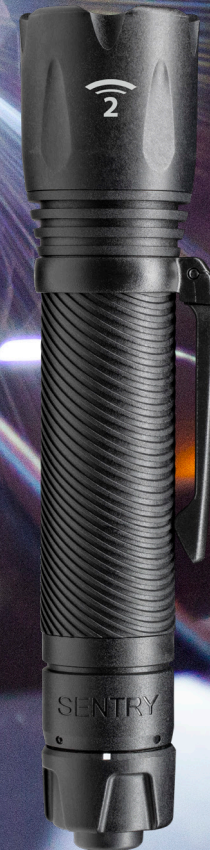

# Sentry . . . Simply Brilliant



The Sentry can also be powered by an ASP 18650 battery

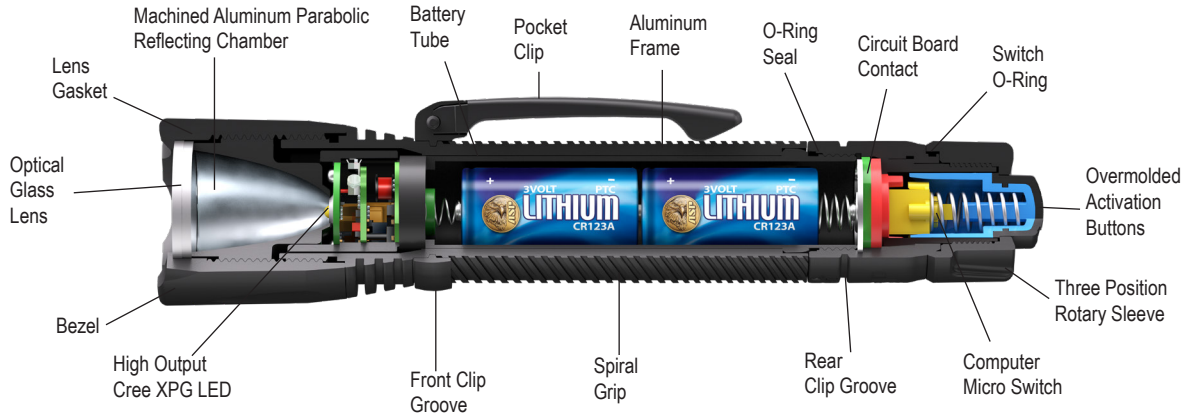

## Background

- Designed to professional law enforcement standards
- Polymer construction
- Aluminum frame
- No sharp edges
- O-ring sealed for maximum water resistance
- Distinct profile

## Specifications

Length	6.7"	170 mm
Diameter	1.4"	35.6 mm
Weight	5.1 ounces	144.6 grams (with batteries)
System	6 volts	
High Output	700 lumens	
Low Output	15 lumens	
High Run Time	1 hour 15 minutes	

## Body

- Matte Black
- Spiral ring grip
- Front clip groove
- Rear clip groove

## Pocket Clip

- Detachable

## Power Cells

- Two Lithium CR123A
- PTC protected
- Safety vent
- Ten year shelf life
- Leak proof
- Vibration resistant
- Link case

## Power Cell Tube

- Polymer
- Aluminum frame
- Spiral ring grip
- O-ring sealed

## Locking Switch

- Back mounted
- Quick and positive switch location under stress
- O-ring sealed activation button
- Locked (center)
- Constant on/off switch activation (right)
- Intermittent switch activation (left)
- O-ring sealed switch cover
- PC board positive circuit contact
- Sensitive and quiet switch activation
- Computer micro switch controlled
- Self-cleaning (no carbon buildup)

- Fail safe (backup) switch circuits
- Replaceable modular switch assemblies
- O-ring sealed connection to the light body
- Rotate one full turn to prevent accidental activation

## Reflector Assembly

- Parabolic
- Extremely durable
- Computer calculated ray traces
- Long distance penetrating beam
- Room illuminating halo
- Gasket sealed

## LED Assembly

- Proprietary heat management
- Custom driver
- Smart chip technology
- Tempered optical glass lens
- Gasket sealed

## Belt Case

- Optional purchase

## Warranty

- Limited Lifetime



TLC Tactical Light Cases protect and securely retain the Sentry®



## SWITCH ACTIVATION

