




Tungsten[®] DF



18650 RECHARGEABLE



CR123A BATTERIES

- Dual Fuel 18650 or CR123A
- Micro USB Charge Port
- Type III Hardcoat Anodizing
- Reversible Pocket Clip
- Intermittent · Locked · Constant Switch




The Dual Fuel Tungsten DF adds a micro USB charge port, internal charge circuit and Lithium-ion power cell to the distinctive Tungsten design. Premium Tungsten features remain. A ringed, three flute grip is machined into a matte black Type III hardcoat anodized aerospace aluminum body. The four cut switch rotates to an Intermittent · Locked · Constant position. The detachable Pocket Clip may be positioned lens up or lens down. All connectors and springs on the Tungsten DF are gold plated. The electronic circuit board drives a Cree XPG LED. The unique Double Tap technology allows instant access to a 15 lumen low level output.

Loosening the head of the Tungsten reveals the micro USB charge port. Attach the retractable charging cord to the supplied Car Charger, Wall Charger or to a computer USB port. Even a micro USB cell phone charger can be used to recharge the Tungsten DF. The battery indicator of the Tungsten blinks red when charging. It turns solid green when fully charged. The Car Charger and Wall Charger have a blue LED indicator to confirm that the power source is active. The chargers and cord are encased in a zippered ballistic carrier.

Dual Fuel Technology of the Tungsten DF employs an 18650 rechargeable Lithium-ion power cell. The light also accepts CR123A batteries. These primary cells are unaffected by the Tungsten DF charge circuit.

Sleek and compact with a unique form factor. A Transitional light that is easily charged. The exceptionally bright Tungsten DF. Simply Brilliant.

Tungsten DF . . . Simply Brilliant

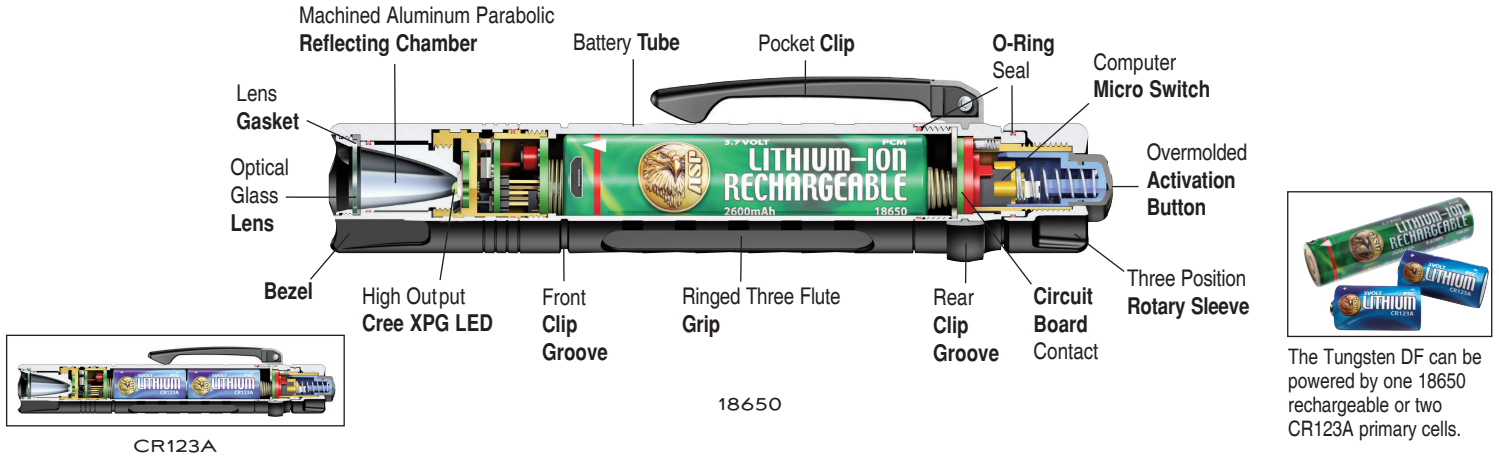

Background

- Designed to professional law enforcement standards
- Aerospace aluminum construction
- Precision machined
- No sharp edges
- O-ring sealed for maximum water resistance
- Distinct profile
- Dual Fuel

Specifications

| | | |
|----------|-------------|----------------------------|
| Length | 5.75" | 146 mm |
| Diameter | .91" | 23.11 mm |
| Weight | 4.24 ounces | 120 grams (with batteries) |

18650

| | |
|---------------|----------------------------|
| System | 3.7 volt |
| High Output | 430 lumens (ANSI Standard) |
| Low Output | 15 lumens (ANSI Standard) |
| High Run Time | 3 hours 30 minutes |
| Low Run Time | 110 hours |

CR123A

| | |
|---------------|----------------------------|
| System | 6 volt |
| High Output | 560 lumens (ANSI Standard) |
| Low Output | 15 lumens (ANSI Standard) |
| High Run Time | 1 hour 15 minutes |
| Low Run Time | 28 hours |

Body

- 6061 T6 high strength aluminum
- Matte black finish
- Type III hardcoat anodized
- Coated threads for durability
- Exterior and interior scratch and corrosion protection
- Ringed three flute grip
- Front clip groove
- Rear clip groove

Pocket Clip

- Detachable
- Reversible

Rechargeable Power Cells

- Proprietary 18650 Lithium-ion (2200 mAh)
- 3.7 volt
- PTC protected
- PCM protected
- Overcharge protection
- Fast discharge protection
- Short circuit protection
- Leak proof
- Vibration resistant
- Ten year shelf life
- Link case

Charge System

- Micro USB
- Flashing red charging
- Solid green fully charged

Primary Cell

- CR123A Lithium primary
- 3 volt
- PTC protected
- Leak proof
- Vibration resistant
- Ten year shelf life

Power Cell Tube

- Ringed three flute grip
- O-ring sealed

Locking Switch

- Back mounted
- Quick and positive switch location under stress
- O-ring sealed activation button
- Locked (center)
- Constant on/off switch activation (right)
- Intermittent switch activation (left)
- O-ring sealed switch cover
- PC board positive circuit contact
- Sensitive and quiet switch activation
- Computer micro switch controlled
- Self-cleaning (no carbon buildup)
- Fail safe (backup) switch circuits
- Replaceable modular switch assemblies
- O-ring sealed connection to the light body
- Rotate one full turn to prevent accidental activation

Reflector Assembly

- Parabolic
- Extremely durable
- Computer calculated ray traces
- Long distance penetrating beam
- Room illuminating halo
- Tempered optical glass lens
- Gasket sealed

LED Assembly

- Cree XPG LED
- Proprietary heat management
- Custom driver
- Smart chip technology
- Gasket sealed

Belt Cases

- Injection molded

Travel Case


- Ballistic weave
- Zippered

Warranty

- Limited Lifetime



TLC Tactical Light Cases protect and securely retain the Tungsten DF.

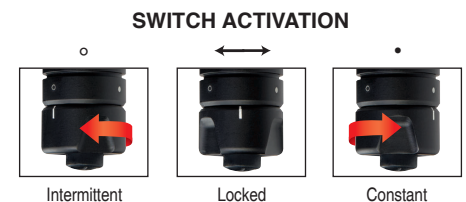

NOTE: Use only ASP 18650 Lithium-ion rechargeable batteries with Tungsten DF lights.

