


Agent Infinity Batons A30, A40, A50

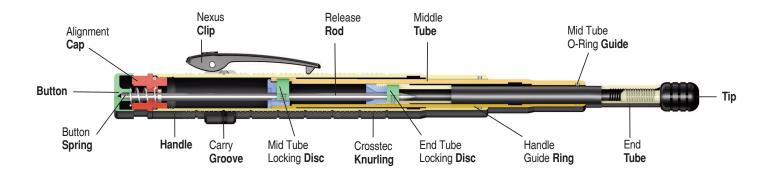

Background

Custom formulated tubing High strength Custom drawn

Sp

ecifications		
Retracted Length	1	
30	6.3"	16.00 cm
40	7.75"	19.69 cm
50	9.0"	22.86 cm
Expanded Lengtl	h	
30	11.8"	30.00 cm
40	15.75"	40.00 cm
50	19.625"	50.00 cm
Weight (Airweigh	it)	
30	6.4 ounces	181 grams
40	7.3 ounces	207 grams
50	8.3 ounces	235 grams
Weight (Steel)		
30	10.2 ounces	289 grams
40	13.2 ounces	374 grams
50	15.36 ounces	435 grams
Diameter	875"	2 22 cm

Talon Loc



Locking System

Duty Scabbards are low profile, snap-on carriers that swivel 180°.



Duo Scabbards carry a Tungsten light and Concealable Baton.

Steel Tubing

4140 40-45 RC 238,000 PSI tensile

Aluminum Tubing

7075 T6 87 RB 83,000 PSI tensile 73,000 PSI yield

Striking Surface

4140 steel Black Chrome plated

Middle Tube

Airweight 7075 T6 aluminum Hardcoat anodized Steel 4140

Black Chrome plated

Handle

Airweight 7075 T6 aluminum Hardcoat anodized Steel 4140 Black Chrome plated

Locking Discs

High carbon steel Heat treated Electroless Nickel plated



Retract your Agent Baton by depressing the end cap as pressure is exerted against the tip.

Carbon steel

Locking System

Internal locking grooves Opposing discs Spring expanded Rod retracted O-ring sealed

Grip

Cross hatched Spiral micro grooves Machined clip rings One-half inch on center Hardcoat anodized

Сар


Black Chrome plated O-ring sealed

Nexus Clip

Circumferential ring Polymer Replaceable Chrome plated torsion spring Locking band

Warranty

Limited Lifetime









Attach the Nexus clip to your Agent® Infinity Baton by sliding the baton ring over the handle. Insert the snap-in locking band into a selected retention groove.

