


# FFC-60 BREAKOUT BOARD

SKU: ICB00215

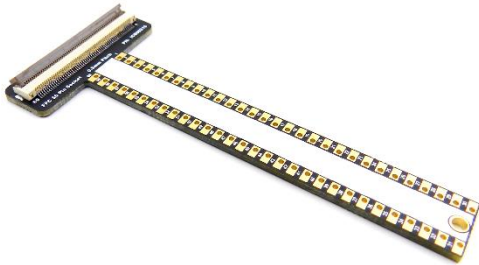

## Description

The FFC-60 breakout board is for Flexible Printed Circuit or Flexible Flat Cable (FPC/FFC) type connections. It comes with the FFC connector already soldered to the board. It's designed to maximize the breadboard space when using it for prototyping. We carry a 60 position flat flex cable that is compatible with the FFC connector included in the FFC-60 breakout board ([Part number ICB94005](#)).

## Technical Details

Footprint Dimensions	
Body (mm):	n/a
Pitch (mm):	n/a
Thermal Pad (mm):	n/a
Breakout Board Dimensions	
Board Dimensions (mil):	1420 x 3448.53
Board Thickness (mil):	62
Through-Hole Spacing (mil):	300 mil (X-axis)
	100 mil (Y-axis)
Breakout Board Specifications	
Board Layers:	6
Finish:	Immersion Gold
Copper:	1 oz
Traces (mil)	10
Trace Lengths (mil):	<3200
Pin/Through-Hole Count:	60




## What's Included?

<b>Parts Installed on Board:</b>	<a href="#">FFC-60 Connector</a>
<b>Parts Included (but not installed):</b>	60 PIN Break Away Header (Straight)

## Additional Features

- Easily identifiable PIN 1 indicator and PIN numbers
- White silk "Label Pads" allow you to label the pins for quick reference
- Extended through-hole pads make for an easy connection point for surface mount parts
- Breadboard friendly pin spacing
- All boards have been E-tested for failures and are RoHS compliant

## Scale Image

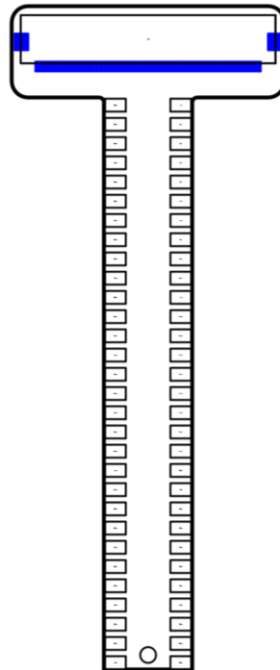

1:1 SCALE

*(Print this page to use the scale image to test the fit of the electronic part.)*

