

Panasonic

BUSINESS

BQ1W Series

4K UHD TOUCH SCREEN LCD DISPLAYS

75-inch class TH-75BQ1W
65-inch class TH-65BQ1W

*Available in US and Canada



Communicate Clearly and Come Up with New Ideas
Using 4K Touch Screen Display

Main Features



Actual resolution: 3840 x 2160p

01 | Control Menu for Easy Operation

Write onto the touchscreen using a pen or your finger without software. The control menu displayed on the screen can be used to easily switched between frequently used operation.

02 | Convenient Functions

In addition to the Screen comparison mode and multi input display function that projects multiple teaching materials simultaneously, the display features built-in applications such as a stamp and timer that can help progress a class.

03 | Universal Design

A color universal design that can be identified by people with diverse color vision has been adopted. The speaker and input terminals have been placed on the front for easy to hear and intuitive use.




Easy touch control menu
Control the input switching, volume adjustment and setting operation with a touch.

	TH-75BQ1W	TH-65BQ1W
Screen Size	75-inch class (74.5")	65-inch class (64.5")
Brightness	500 cd/m ²	
Contrast	1200:1	
LCD Panel	IPS/ Direct LED	
Resolution	3840 x 2160	


Compatible with directly writing onto and saving materials displayed on the screen

The BQ1 Series features a built-in whiteboard function. Users can directly write onto the images and video displayed from external input devices. The written data can be saved as onto the built-in memory or USB memory.

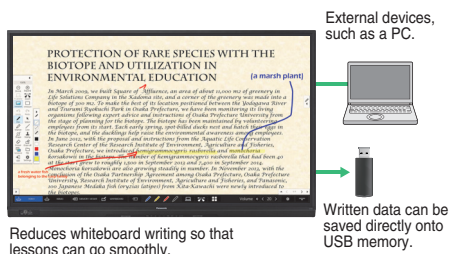

Equipped with applications that are optimal for group work

Data from a USB memory or captured data can be selected and up to nine screens can be compared. In addition to exchanging opinions about samples or comparisons during group work, users can freely pick out and display or write onto a screen.

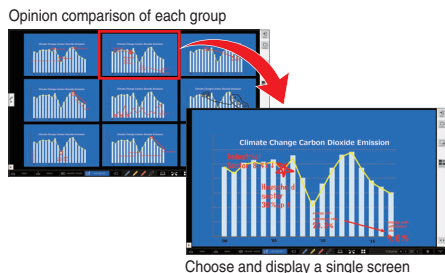

Equipped with a DIGITAL AV OUT terminal that is convenient for large screen displays

The BQ1 Series is equipped with a DIGITAL AV OUT terminal. By connecting it to a projector using an HDMI cable, the same screens can be displayed. The enlarging or scaling of the writing on the screen are reflected in real-time, making it convenient for classes held in large halls or lecture rooms.



Specifications

Model		TH-75BQ1W	TH-65BQ1W	
Display Panel	Panel size	75-inch class (1892.7 mm)	65-inch class (1638.9 mm)	
	Panel type / Backlight	IPS / Direct-LED		
	Effective display area (W x H)	64.9" x 36.5" (1649.6 x 927.9 mm)	56.2" x 31.6" (1428.4 x 803.5 mm)	
	Resolution	3840 x 2160		
	Brightness (typ.) ¹⁾	500 cd/m ²		
	Contrast ratio (typ.)	1200:1		
	Response time (typ.)	8.0 ms (G to G)		
	Viewing angle [(T/B)/(L/R)]	178° / 178° (CR>10)		
Touch Panel	Detection method	Infrared blocking detection method		
	Touch operation	Up to 20-point multi-touch ²⁾		
Terminals	OS	Windows (8.1 / 10), Mac OS (10.12 / 10.13 / 10.14 / 10.15)		
	HDMI In	Type A Connector x 3 (HDCP 2.2 supported)		
	DIGITAL Out	HDMI Type A Connector x 1		
	DVI-D In	DVI-D 24-pin x 1		
	DisplayPort In	DisplayPort x 1 (HDCP 2.2 supported)		
	PC In	Mini D-Sub 15-pin x1 (compatible with DDC2B)		
	USB	USB Connector (TYPE A) Back x 1 DC 5V/ max. 0.9A (USB3.0 is supported), Front x 2 DC 5V/ max. 0.5A (USB2.0 is supported)		
	USB (TOUCH)	USB Connector (TYPE B) x 1		
	Serial In	D-Sub 9-pin x 1 (for external control, RS-232C compliant)		
	Audio In/Out	Stereo mini-jack (M3) x 2 (Shared with DCI-D IN and PC IN) / x 1		
Audio	LAN	RJ45 x 1, 10BASE-T/100BASE-TX/1000BASE-T, compatible with PLink™		
	SLOT	Intel® SDM specification, Corresponding size SDM-S / SDM-L, Supply power 3.3 V / 1.1 A, 12 V / 5.5 A		
	Built-in speaker	20 W (10 W + 10 W) 10 % THD		
Power requirements	Speaker out	30 W (15 W + 15 W) 10 % THD		
	Power consumption	110-240 V AC, 50/60 Hz		
	On Mode Average Power Consumption ³⁾	363 W	320 W	
	Power off condition	278 W	230 W	
	Standby condition	Approx. 0.3 W		
	Dimensions (W x H x D)	Approx. 0.5 W		
	Weight	67.6" x 40.7" x 4.2" (1716 x 1032 x 107 mm) (with handles)	58.9" x 35.8" x 4.2" (1495 x 908 x 105 mm) (with handles)	
	Bezel width	124.8 lbs. (56.6 kg)	95.7 lbs. (43.4 kg)	
	Wall-hanging pitch	T/R/L 0.65" (16.3 mm), B 2.14" (54.3 mm) (with speaker)		
	Protective glass	VESA Compliant 23.6" x 15.8" (600 x 400 mm)	VESA Compliant 15.8" x 15.8" (400 x 400 mm)	
Operation	Operation	Anti Glare Surface / Scattering prevention film		
	Tilt/tilt angle ⁴⁾	Landscape / Portrait		
	Operating time ⁵⁾	Landscape: 0 degrees forward, 0-45 degrees backward, Portrait: 0 degrees forward/backward		
	Operating environment	Temperature	18 h/day	
		Humidity	32 °F to 104 °F (0 °C to 40 °C) [for up to 4593' (1400 m) altitude] / 32 °F to 95 °F (0 °C to 35 °C) [for between 4593' and 9186' (1400 m and 2800 m) altitude]	
		20 % to 80 % (Non-condensation)		

¹⁾ The brightness of display panel not shipping product. ²⁾ When using the Whiteboard Software for Windows®. When using Mac single touch. ³⁾ Based on IEC 62087 Ed.2 measurement method. ⁴⁾ Please contact your sales representative with regard to the tilt angle before installation. ⁵⁾ In case of long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.

Optional Accessories

- 3G-SDI Terminal Board TY-SB01SS
- Early Warning Software¹⁾ ET-SWA100/105 Series²⁾
- ¹⁾ Multi Monitoring & Control Software ver.2.1 or later required.
- ²⁾ Part number suffix may differ depending on the license type.



Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability may vary on region and country. Intel® is registered trademark or trademark of Intel Corporation, registered in the U.S. and other countries and regions. This product may be subject to export control regulations. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other trademarks are the property of their respective trademark owners. © 2020 Panasonic Corporation. All rights reserved.



For more information about Panasonic Professional Displays, please visit:
 Display Global Website – panasonic.net/cns/prodisplays
 YouTube – www.youtube.com/user/PanasonicProDisplay

All information included here is valid as of May 2020.

CT20-U01PF-BQ1 Printed in Japan.