



# USA TECHNOLOGIES

## SPLASH COVER FOR CARD READER INSTALLATION GUIDE

### ADDITIONAL SCREWS REQUIRED

Please carefully read the information below. Failure to have all the articles listed could result in injury, loss of valuable time, or device failure.

#### PARTS NOT INCLUDED

4 Screws ( 3/16in longer than current screws )  
ID Tech Bezel: 8-32 x 9/16  
OTI Bezel: M4-0.7mm x 16.7625

Screwdriver

#### PARTS INCLUDED IN KIT

Splash Cover for Card Reader

VXXT0102301, PRINTED DOCUMENT  
SPLASH COVER FOR CARD READER

#### USA TECHNOLOGIES CUSTOMER CARE

Contact USA Technologies Customer Care for technical support and to request additional parts, information, and pre-authorization forms.

**Phone:** 888.561.4748

**FAX:** 610.989.9695

**Email:** [customersupport@usatech.com](mailto:customersupport@usatech.com)

**Online Store:** <http://store.usatech.com>

**All contents © Copyright 2019 USA Technologies, Inc.**

**All rights reserved.**



Figure 1.

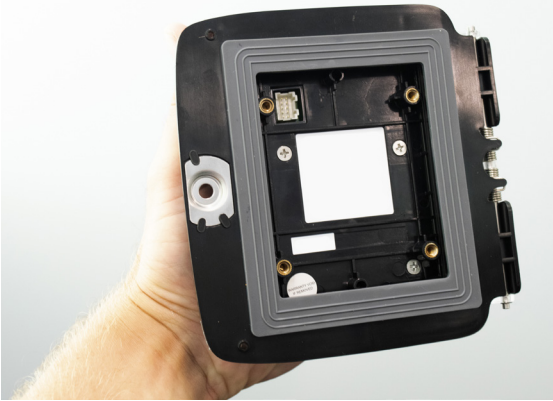


Figure 2.



## Installation Instructions

Below are the steps you need to follow when installing the Splash Cover for your card reader. Experience has shown that proceeding in the exact order listed below will generally result in the fewest problems and save you the most time.

Step 1: (Only if Card Reader is installed)

Open the front door of the machine, and unscrew all 4 screws dismounting the card reader from the machine.

Step 2: Open the front door of the Splash Cover and insert the unmounted Card Reader

Step 3: With the Card Reader inside the Splash Cover, hold the Card Reader firmly against the vending machine, lined up to the holes that have been drilled

Step 4: Screw all 4 new screws back into the card reader, with the Splash Cover in-between. **You will need to purchase 4 new screws that are 3/16 in longer than the current screws.**