

Dynasty® LED Omni Light 802B Series



5 Year Warranty



Specifications

Model	802B-36W
Power Consumption	≤38W
Input Voltage	AC100-277V 50-60Hz
CCT*	3000K / 4000K / 5000K
Power Factor	≥0.9
CRI	> 80
Lumen	4583 ±204lm
LED	Samsung
LED Quantity	0.3W x 108 LEDs
LED LM80	Yes

* Other CCTs available upon request.



Samsung LEDs



Rubycon Capacitors





E39/EX39 Base




JAE Connectors


Dimensions

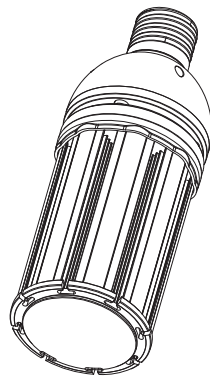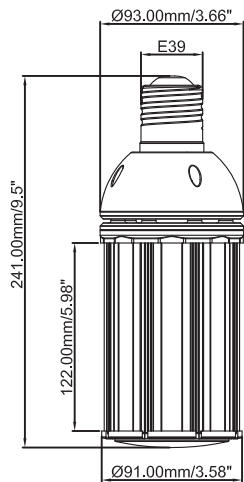


Beam Spread

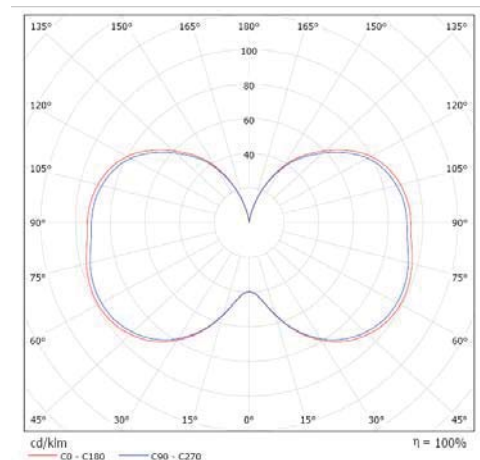

Lifespan of 10 years




Reliability Test




Surge Protection Circuit




Environmentally



Savings of 87% on



Suitable for Enclosed Fixtures




Omni Directional

Dynasty® LED Omni Light 802B Series



Typical Installation

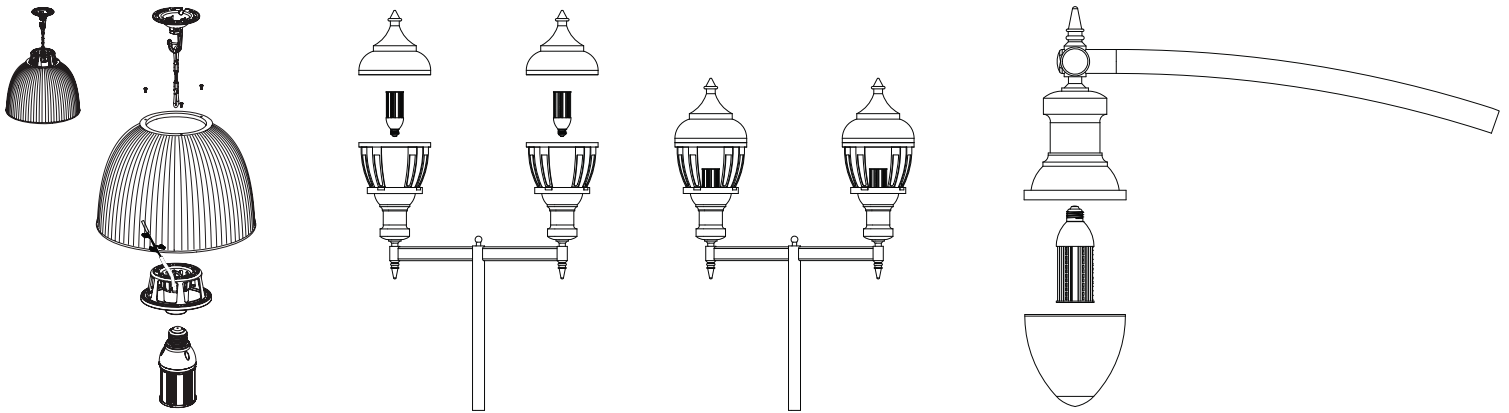


High Bay Lighting

Street Lighting / Acorn

Maximum Rating

Parameter	Rating	Units
Aluminum Heat Sink Temperature	61.8	C
Operating Temperature	-20~+65	C
Storage Temperature	-40~+80	C
Equilibrium Temperature	25	C



Wiring Diagram

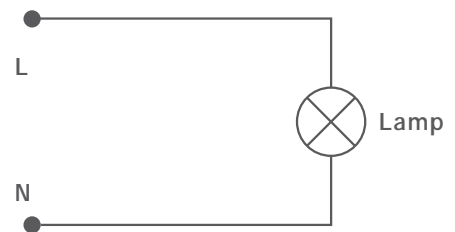

LED Omni Light Wiring Diagram

Product Packing Specification

Packing Details	
Pack Quantity	12pcs
Net Weight	21lbs/904.6g
Gross Weight Per CTN	27lbs/12.3kg
Box Size	4.96*4.96*11.2" 126*126*285mm
CTN Size	16.1*10.4*23.2" 405*265*590mm

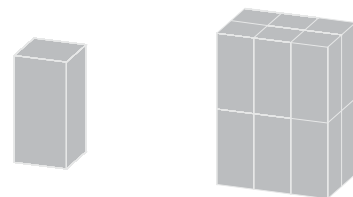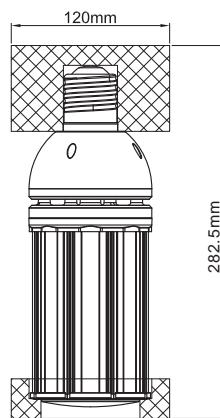

⚠ CAUTIONS

- Do not place lamp near flammable materials.
- Please allow lamp to cool before replacing.

CAO LIGHTING, INC.
LED through Innovation™

4628 West Skyhawk Drive, West Jordan, UT 84084-4501
Phone 877.236.4403 Fax 801.256.9287
customer@caolighting.com
www.caolighting.com

ISO 9001 CERTIFIED
Patent #6,465,961, #6,634,770, #6,746,885, #7,728,345 and patents pending
©2017 CAO Lighting, Inc. SAL-FL0032 15AUG2017