

FITTINGS CONTENTS

MINI SHOAL (6 FISH)

6 X SINGLE HOLE FISH FITTINGS WITH WASHERS
6 X SCREWS
6 X RAWL PLUGS

REEF SHOAL (13 FISH)

13 X SINGLE HOLE FISH FITTINGS WITH WASHERS
13 X SCREWS
13 X RAWL PLUGS

OCEAN SHOAL (15 FISH)

30 X DOUBLE HOLE FISH FITTINGS
30 X SCREWS
30 X RAWL PLUGS

PACIFIC (10 FISH)

5 X SINGLE HOLE FISH FITTINGS WITH WASHERS
10 X DOUBLE HOLE FISH FITTINGS
15 X SCREWS
15 X RAWL PLUGS

ATLANTIC (15 FISH)

9 X SINGLE HOLE FISH FITTINGS WITH WASHERS
12 X DOUBLE HOLE FISH FITTINGS
21 X SCREWS
21 X RAWL PLUGS

NOTE: IF ANY OF THESE FITTINGS ARE MISSING FROM YOUR PACK PLEASE CONTACT US.

Fitting Instructions



Jo Downs

HANDMADE GLASS



FITTING YOUR SHOALING FISH COLLECTION

Our simple wall mounting system makes it easy for you to create the perfect design.

YOU WILL NEED:


- A pencil
- A drill including a (5mm) drill bit suitable for the type of wall you are mounting on.
- Rawl plugs (only use the supplied rawl plugs if they are suitable for the type of wall)
- A screwdriver & allen key

HOW TO:

We recommend that you fit each fish one at a time until you are happy with the pattern you have created. If you are aiming for a SWIRL effect, start from the centre and work outwards on a roughly circular line until you have used the last fish. If you are aiming for a FLOW effect start at the front of the flow and work backwards until you have used the last fish.


SUGGESTED PATTERNS FOR MINI, REEF AND OCEAN SHOALS BELOW

SWIRL PATTERN

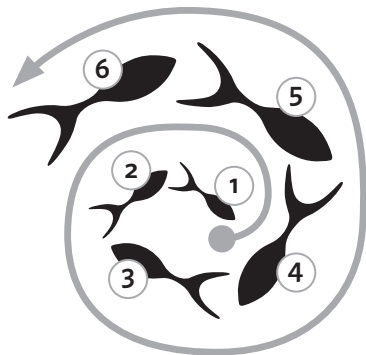

- Start here and work outwards one at a time.

FLOW PATTERN

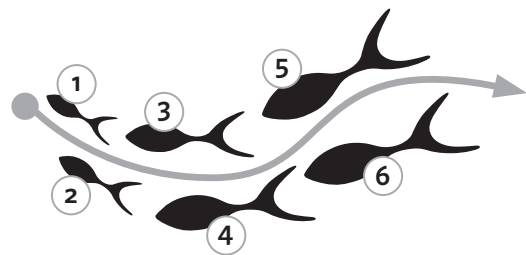

- Start here and work backwards one at a time.

RECOMMENDED PATTERNS FOR PACIFIC AND ATLANTIC SHOALS

ATLANTIC PATTERN



Start with the inner circle of fish and work your way out.

PACIFIC PATTERN



Start with the inner circle of fish and work your way out.

SELF DESIGN PATTERNS



1. Lay each fish on a piece of card or paper and draw around the outside, then mark where the fitting holes are.
2. Cut around the outline and fitting hole then number each fish and template for ease of identification.
3. Put each template on the wall with blu tac and rearrange until you are happy with the whole design.
4. Use the hole cut outs to mark the fitting screw locations.
5. Follow the fish fitting instructions.

FITTING INSTRUCTIONS:

ENSURE YOU CHECK FOR UNDERLYING PIPES AND CABLES IN THE INSTALLATION AREA BEFORE COMMENCING WORK.

1. Position your first fish against the wall and mark the drill hole / holes with a pencil.
2. Place the fish safely aside and drill where marked, inserting a rawl plug when you have finished.
3. Screw the wall mounted fittings firmly into place.
4. (Single fish only) Insert a plastic washer into the hole in the glass on the side that faces the wall.
5. Hold the fish against the fitting, insert the bolt through the hole (& washer if using) and gently screw it into the barrel. Hand tighten the bolts to a firm grip, or use a small allen key for fittings which have a lever hole. For fish with a single drill hole, make sure the fitting is tight enough to hold the fish at the angle of your choice.

And that's it! Simply repeat for each of your Shoaling Fish.

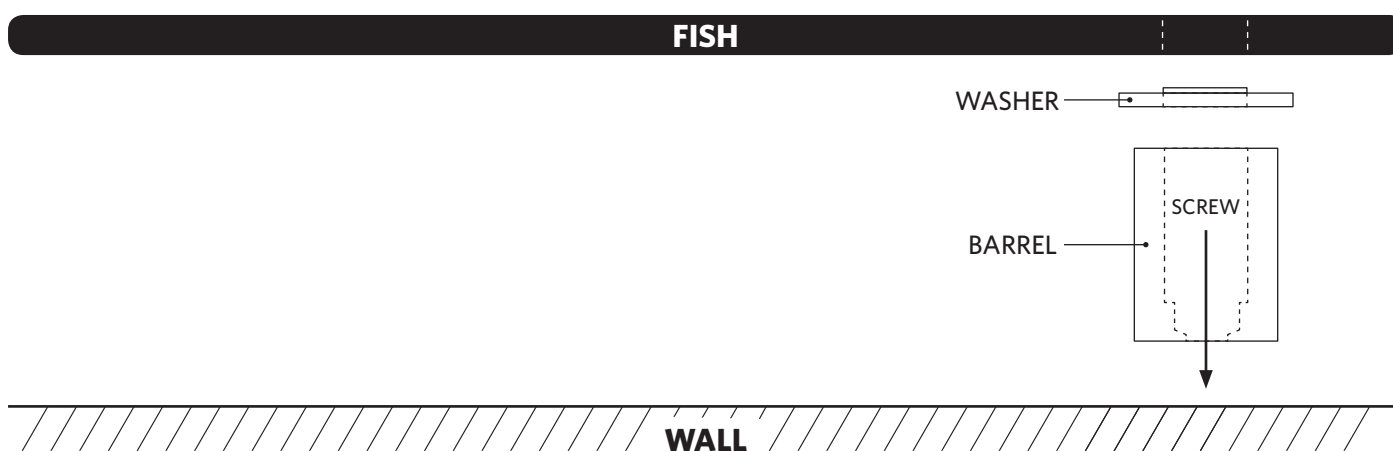

CARING FOR YOUR SHOALING FISH:

Your fish will benefit from an occasional gentle wipe over with glass cleaner and a soft cloth.

FREQUENTLY ASKED QUESTIONS:

Will daylight damage the colour of my fused glass fish?

Artificial light or bright sunlight will not dull the colour of your fish so feel free to mount them where they will really dazzle!

What if I break one of my fused glass fish?

For your convenience we also sell Shoaling Fish individually in Mini, Reef, Ocean, Pacific and Atlantic sizes and in all of our five colourways of Aqua, Marine, Lagoon, Caspian and Sea Pink.

What if my wall needs painting?

You can easily remove your shoaling fish by unscrewing the bolts ensuring that you hold the fish while doing so to prevent slippage. Store the fish, bolts and any washers safely then wrap the barrel in masking tape prior to painting. You can then slot the fish straight back onto the wall fittings with no fuss.