



## FILMTEC™ BW302540 Membranes

FILMTEC Fiberglass Elements for Light Industrial Systems

### Features

FILMTEC™ brackish water reverse osmosis membrane elements provide consistent, outstanding system performance in light industrial applications.

- FILMTEC LE4040 delivers highest performance at lowest pressure resulting in less energy usage and lower costs.
- FILMTEC BW304040 is the industry standard for reliable operation and production of the highest quality water.
- FILMTEC BW302540 elements are designed for systems smaller than 1 gpm (0.2 m<sup>3</sup>/h) offering a hard shell exterior for extra strength.

Elements with a hard shell exterior are recommended for systems with multiple element housings containing three or more membranes, as they are designed to withstand higher pressure drops.

### Product Specifications

| Product  | Part Number | Active Area<br>ft <sup>2</sup> (m <sup>2</sup> ) | Feed Spacer<br>Thickness (mil) | Permeate Flow Rate<br>gpd (m <sup>3</sup> /d) | Stabilized Salt<br>Rejection (%) |
|----------|-------------|--------------------------------------------------|--------------------------------|-----------------------------------------------|----------------------------------|
| LE4040   | 275173      | 78 (7.2)                                         | 34                             | 2,500 (9.5)                                   | 99.0                             |
| BW304040 | 80783       | 78 (7.2)                                         | 34                             | 2,400 (9.1)                                   | 99.5                             |
| BW302540 | 80766       | 28 (2.6)                                         | 28                             | 850 (3.2)                                     | 99.5                             |


1. Permeate flow and salt rejection based on the following test conditions: 2,000 ppm NaCl, applied pressure: 150 psig (10.3 bar) for LE4040 and 225 psig (15.5 bar) for BW304040 and BW302540, 77°F (25°C) and 15% recovery.

2. Permeate flows for individual elements may vary +/-20%.

3. For the purpose of improvement, specifications may be updated periodically.

4. LE4040 replaces BW30LE4040.

**Figure 1**

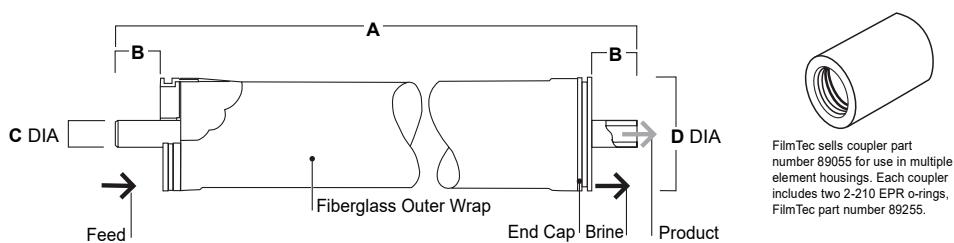

FilmTec sells coupler part number 89055 for use in multiple element housings. Each coupler includes two 2-210 EPR o-rings, FilmTec part number 89255.

### Dimensions – Inches (mm)

| Product  | A            | B           | C         | D        |
|----------|--------------|-------------|-----------|----------|
| LE4040   | 40.0 (1,016) | 1.05 (26.7) | 0.75 (19) | 3.9 (99) |
| BW304040 | 40.0 (1,016) | 1.05 (26.7) | 0.75 (19) | 3.9 (99) |
| BW302540 | 40.0 (1,016) | 1.19 (30.2) | 0.75 (19) | 2.4 (61) |

1. Refer to FilmTec Design Guidelines for multiple element systems.

1 inch = 25.4 mm

2. BW302540 elements fit nominal 2.5inch I.D. pressure vessel. BW30LE4040 and BW304040 elements fit nominal 4inch I.D. pressure vessel.

## **Operating Limits**

|                                               |                                                                 |
|-----------------------------------------------|-----------------------------------------------------------------|
| • Membrane Type                               | Polyamide ThinFilm Composite                                    |
| • Maximum Operating Temperature <sup>a</sup>  | 113°F (45°C)                                                    |
| • Maximum Operating Pressure                  | 600 psi (41 bar)                                                |
| • Maximum Feed Flow Rate                      | 4040 elements<br>2540 elements                                  |
| • Maximum Pressure Drop                       | 16 gpm (3.6 m <sup>3</sup> /h)<br>6 gpm (1.4 m <sup>3</sup> /h) |
| • pH Range, Continuous Operation <sup>a</sup> | 15 psig (1.0 bar)                                               |
| • pH Range, ShortTerm Cleaning <sup>b</sup>   | 2-11<br>1-13                                                    |
| • Maximum Feed Silt Density Index             | SDI 5                                                           |
| • Free Chlorine Tolerance <sup>c</sup>        | <0.1                                                            |

<sup>a</sup> Maximum temperature for continuous operation above pH 10 is 95°F (35°C).

<sup>b</sup> Refer to Cleaning Guidelines in specification sheet 60923010.

<sup>c</sup> Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure. Since oxidation damage is not covered under warranty, FilmTec recommends removing residual free chlorine by pretreatment prior to membrane exposure. Please refer to technical bulletin 60922010 for more information.

## **Important Information**

Proper startup of reverse osmosis water treatment systems is essential to prepare the membranes for operating service and to prevent membrane damage due to overfeeding or hydraulic shock. Following the proper startup sequence also helps ensure that system operating parameters conform to design specifications so that system water quality and productivity goals can be achieved.

Before initiating system startup procedures, membrane pretreatment, loading of the membrane elements, instrument calibration and other system checks should be completed.

Please refer to the application information literature entitled "StartUp Sequence" (Form No. 609 02077) for more information.

## **Operation Guidelines**

Avoid any abrupt pressure or crossflow variations on the spiral elements during startup, shutdown, cleaning or other sequences to prevent possible membrane damage. During startup, a gradual change from a standstill to operating state is recommended as follows:

- Feed pressure should be increased gradually over a 3060 second time frame.
- Crossflow velocity at set operating point should be achieved gradually over 1520 seconds.
- Permeate obtained from first hour of operation should be discarded.

## **General Information**

- Keep elements moist at all times after initial wetting.
- If operating limits and guidelines given in this bulletin are not strictly followed, the limited warranty will be null and void.
- To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution.
- The customer is fully responsible for the effects of incompatible chemicals and lubricants on elements.
- Maximum pressure drop across an entire pressure vessel (housing) is 50 psi (3.4 bar).
- Avoid static permeateside backpressure at all times.

## **Regulatory Note**

These membranes may be subject to drinking water application restrictions in some countries: please check the application status before use and sale.

Notice: The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

