## GRIP STRIP

## The Choice of Professionals

For several years, chinking applicators have had a choice of a variety of backing materials, but most of these materials sacrificed one important property or another. Triangular and round-shaped rods often had to be cut to insure proper fit and spray adhesive or staples would be added for retention within the chink joint. Finally, a product is available that allows the applicator to bypass these time-consuming procedures. **GRIP-STRIP**, a chemically inert foam backing rod, performs in applications where others fail.

## **DESIGN**

**GRIP-STRIP**'s unique design provides an excellent fit and a flat surface within the chink joint. This results in a savings in material used.

**GRIP-STRIP** is a closed-cell product. Under normal use, it will not cause outgassing.

## ADVANTAGES


- Repels moisture most open-cell products absorb
- Provides a firm chinking surface
- Compatible with all commercially available chinking
- Compresses to fit a wide variety of log surfaces
- Can be used on exterior or interior surfaces

Availability	
Width	Total Qty.
3/4"	1200 ft
1"	960 ft
1 1/4"	600 ft
1 1/2"	460 ft
2"	360 ft
2 1/2"	260 ft
3"	200 ft
3 1/2"	176 ft
4"	144 ft
5"	120 ft
The shaded sizes are available in sample packs.	

in sample packs.

Grip Strip is packaged in boxes in 48" lengths.

GS-001 11/97

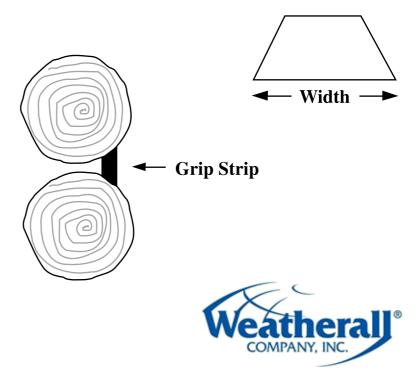

800-367-7068