Recommended Application

Make certain that your wood surface is free from all dirt, stains, oil, grease, grime, mildew, fungus or loose bark prior to stain application. UV Guard® Wood Finish may be applied by brush, airless sprayer or pump sprayer. If spray application is used then back brushing is necessary. The second coat can be applied as a wet-on-wet application or a wet-on-dry application. Each coat will be dry to the touch within 30 minutes to an hour and completely dry within 24 to 48 hours depending on the ambient temperature and the relative humidity. When your desired color has been achieved, a final topcoat of UV Guard® Advance Clear Wood Finish should be applied. Both products used together offer the maximum amount of protection and durability. Please inquire with us for a complete UV Guard® Wood Finish application guide prior to the start of your next job.

Maintenance

Once your finish starts to look dull then simply clean the surface and apply another coat of the clear finish. Expect to re-apply the UV Guard® Advance Clear Wood Finish every 2 to 4 years on the southern exposure and every 3 to 5 years on the other sides of your structure. Please remember that the overall durability of your stain is dramatically affected by the preparation of your wood prior to staining and how good of a job you do during the stain application process. Back brushing your stain into the pores of your wood is a must.

Packaging

Sample Jar, 1 Gallon Pail and 5 Gallon Pail

Coverage Rates

150-300 square feet per gallon on the first coat. 300-400 square feet per gallon on subsequent coats.

**The above coverage rates are highly dependent upon the porosity of the wood. Stain not recommended for high density, high oil content or exotic woods.

Experience & Reputation

For over 30 years, the Weatherall Company has been making and delivering the best wood finishes, chinking and caulking products in the industry. **Some things need to be earned.**

Complete Wood Care System

We are proud to offer wood stains, chinking and caulking designed specifically for logs, wood siding or timbers. We believe that our system of products will not only enhance the beauty of your home, but also offer unsurpassed protection and longevity. Let us take the worry out of compatibility issues.

We are making it easy to **GO GREEN**.

In a world that moves at lightning speed it is sometimes easy to forget about being socially responsible. The Weatherall Company offers a full line of environmentally friendly products that protect you, the environment and your wood structure. No longer do you need to breathe harsh chemicals to get the results that you desire. *Mother Nature would like to take this opportunity to thank you.*


WE CARE Attitude

Whether you are looking to purchase more materials or simply need advice, our goal is to make sure that you get the best customer experience. Let us show you that CUSTOMERS do matter.

Try Before You Buy

You've waited this long to get your dream house; why not wait a couple more days to make sure you get the colors you want? We will send you a kit that includes stain samples, caulking color charts, chinking color charts and application guides. **Knowing exactly what you want is a good thing.**



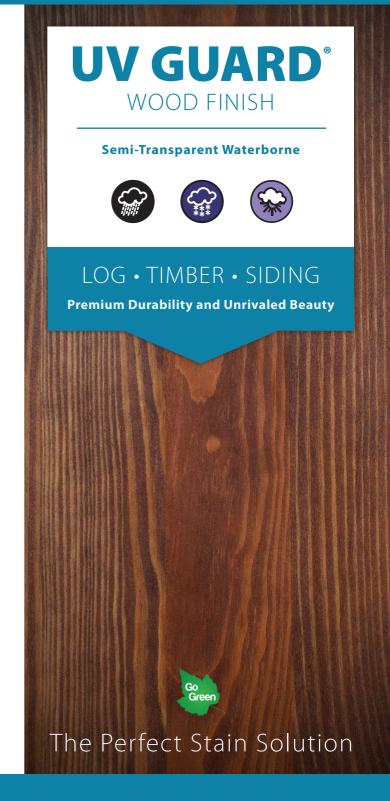

UV GUARI WOOD FINISH

Premium Durability and Unrivaled Beauty

UV Guard® Wood Finish is a water-based acrylic, semi-transparent stain that is specifically formulated to protect your log home, wood siding, shingles, soffits, timbers or fence from the adverse effects of Mother Nature. No harsh solvent fumes makes this an excellent choice for interior work as well. Relax and take the worry out of protecting your wood. It is easy to apply and easy to clean up. Stringent testing proved that UV Guard® Wood Finish lasts longer and provides greater protection than our competitors' products. Inquire about our Competitive Stain Test brochure to view the results. It is available in 11 standard colors and custom colors can be made upon request.

Why it Works

UV Guard® Wood Finish is the premier exterior or interior coating in the industry because it contains highly advanced UV absorbers and stabilizers that are combined with the best pigments available. This formula effectively resists the sun's harmful rays while it repels water; yet provides a "breathable" coating that resists warping, swelling or cracking caused by excessive moisture. UV Guard® Wood Finish contains a biocide that deters unsightly discoloration caused by mold and mildew.

Features

- Easy Application
- Long Lasting UV Protection
- · Environmentally Friendly
- · Natural & Beautiful Finish
- Repels Moisture
- Quick Drying
- Low VOC Formula/ Safe for Interiors
- Soap & Water Clean-Up
- Compatible with Most Caulk & Chinking Products

Stain Application Tips

- Always test a stain sample on your wood.
- Thoroughly stir all containers.
- Apply stain between 40 and 90 degrees.
- Don't stain in direct sunlight.
- Box or mix multiple containers of stain.
- Immediately brush all runs.
- Avoid ladder marks by going from top to bottom.

Sunlight	
Honey Brown	
Amber	
Light Brown	
Dark Brown	
Fawn	
Bramble	
Aspenwood	
Light Gray	
Dark Gray	
Cotswold Gray	
and then topcoated with	finished with two coats of UV Guard® Wood Finish n one coat of UV Guard® Advance Clear Wood Finish. may vary depending on application technique,

wood species or wood porosity. Please contact us for samples.