

# Transportation and Weather

*A Passion for Precision*



*por la precisión · passione per la precisione · a passion for precision · passion pour la précision · pasión por la precisión*



[www.lufft.com](http://www.lufft.com)

 **Lufft**

Compact design  
Easy commissioning  
RS232 or RS485 data transfer  
Easy software updates  
Free configuration software

The Sky's the Limit

# UMB



# UMB Technology

***The UMB (Universal Measurement Bus) system is a new technology for recording environmental data. Whether in the form of a standard weather station or road ice warning equipment, the modular system excels due to easy commissioning, free firmware updates and data transfer via RS232, RS485 or CDMA/GPRS modem. UMB offers flexibility, modularity and web-based visualization as well as polling software.***

The UMB sensor library provides a comprehensive range of environmental sensors for recording temperature, relative humidity, precipitation, visibility and road conditions. The new WS series family of smart weather sensors in particular are outstanding due to their unrivaled price-performance ratio. The top-of-the-range model, WS600-UMB, incorporates sensors for temperature, humidity, precipitation, air pressure, wind direction and wind speed.

The electrical connection for all UMB sensors is made via a standard plug connector system. This keeps installation and service costs to a minimum. Third party sensors and existing analog sensors can be integrated into the UMB system using the ANACON-UMB module.

All UMB sensors can be polled by means of a standard protocol. Once data polling has been incorporated for one sensor, additional sensors can be added by way of easy parameterization of the data polling system.

Channel-oriented sensor data polling delivers a large number of computed variables in metric and US format, hence there is no need for conversion by the user. Sensors can be configured, equipment tested and firmware updated with the free configuration software (UMBConfig-Tool).

In addition, Lufft offers a variety of software packages from data retrieval via weather stations (COLLECTOR) to web visualization (SmartView3).

***Third-Party-Sensors: The UMB technology is open and modular. Most of the analog sensor signals and many intelligent sensors of third parties can be integrated into Luffts UMB systems. The Lufft ANACON converts analog signals into UMB output. In case of intelligent (smart) sensors of third party suppliers, we integrate the corresponding sensor protocol into Luffts ISOCON to integrate the sensors into UMB output. Generally, every UMB application herewith can use the best combination of selected sensors.***



# Precise Freeze Temperature Measurement

*- Independent of your De-Icing Agent*

# Lufft ARS31Pro-UMB – Intelligent Active Road Sensor

The active ARS31Pro-UMB sensor is flush-mounted in the road/runway surface and measures the freezing temperature by means of active cooling and heating of the sensor surface.

In addition, the ARS31Pro-UMB measures dry/wet-conditions and the road surface temperature; this surface temperature sensor is integrated into a second housing which is connected with the ARS31Pro-UMB.

The distance between the two housings is 50 cm.

One additional measurement is carried out in order to find out critical conditions in the next few hours. This early alert message is an extra road surface condition information in addition to the road conditions which are measured „now“.

The freezing temperature measurement is independent of mixture. The two-section housing design allows the combined sensor/electronics unit to be removed for maintenance purposes at any time, in just a few minutes.

In conjunction with the interface converter 8160.UISO, the sensor can be built into new and existing UMB networks.

The sensors are addressable and can be networked



**External Road Surface Temperature Sensor**

Replaceable sensor/electronics

Simulation of critical surface conditions in the very near future

All-in-one sensor including active measurement of freeze point temperature

Mixture-independent measurement

Analog outputs in combination with 8160.UDAC

Lufft ARS31Pro-UMB Intelligent Road Sensor			Order No.
<b>ARS31Pro-UMB</b> 50m cable length			<b>8810.U051</b>
<b>Technical data</b>	Dimensions	Ø 120 mm, height 50 mm	
	Weight	approx. 1100 g	
	Detectable road conditions	Dry/wet/critical wetness/ice alert	
	Storage temperature	-40 ... 80 °C	
	Protection type	IP68	
	Op. power consumption	9 ... 36 VDC	
	Plug	CAGE CLAMP, WAGO (cross-section < 0.5 mm <sup>2</sup> )	
	Op. temperature range	-40 ... 80 °C	
	Operating humidity range	0 ... 100 % RH	
	Power consumption	approx. 30 W	
	Interface	RS485, baud rate: 2,400 ... 38,400 bit/s (default: 19,200)	
<b>Freezing point</b>	Measuring range	-40...0°C, however T <sub>g</sub> ≥ T <sub>u</sub> -20°C	
	Accuracy	±0.5 °C RMS for T <sub>g</sub> > -15 °C, or ±1.5 °C RMS for T <sub>g</sub> < -15 °C (at NaCl)	
<b>External road surface temp.</b>	Principle	NTC	
	Measuring range	-40 ... 80 °C	
	Accuracy	±0.2 °C (-10 ... 10 °C), or ±0.5 °C	
	Resolution	0.1	
<b>Accessories</b>	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Spare part cap + electronics ARS31Pro-UMB		<b>8610.DEC</b>
	Surge protector		<b>8379.USP</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Power Supply 24V/4A		<b>8366.USV1</b>



# Lufft IRS31Pro-UMB – Intelligent Passive Road Sensor

Passive road sensor IRS31Pro-UMB is flush-mounted in the road. The two part housing design allows the combined sensor/electronics unit to be removed for maintenance or calibration at any time.

The following variables are recorded:

- Road surface temperature
- Water film height up to 4 mm
- Freezing temperature for different de-icing materials (NaCl, MgCl, CaCl)
- Road condition (dry/damp/wet/ice or snow/residual salt/freezing rain)
- Friction (Grip)
- Ice Percentage

Optional:

- 2 additional depth temperatures, e.g. at 5 cm and 30 cm

The sensors are addressable and can be networked.

The measurement data is available for further processing in the form of a standard protocol (Lufft UMB protocol).



Lufft IRS31-UMB Intelligent Road Sensor		Order No.
<b>IRS31Pro-UMB</b> 50 m cable length		<b>8910.U050</b>
<b>IRS31Pro-UMB</b> 50 m cable length, 1 depth temperature sensor		<b>8910.U051</b>
<b>IRS31Pro-UMB</b> 50 m cable length, 2 depth temperature sensors		<b>8910.U052</b>
<b>IRS31Pro-UMB</b> 100m cable length		<b>8910.U100</b>
<b>IRS31Pro-UMB</b> 100m cable length, 1 depth temperature sensor		<b>8910.U101</b>
<b>IRS31Pro-UMB</b> 100m cable length, 2 depth temperature sensors		<b>8910.U102</b>
<b>Technical data</b>	Dimensions	Ø 120 mm, height 50 mm
	Weight	approx. 800 g without cable
	Detectable road conditions	Dry/damp/wet/ice or snow/residual salt content/freezing wetness
	Storage temperature	-40 ... 80 °C
	Rated current	< 200 mA
	Interface	RS485, Baudrate: 2400 ... 38400 bit/s (Standard: 19200)
	Protection	IP68
	Op. power consumption	9 ... 14 VDC, typical 12V
	Plug	Cable 0.5 mm <sup>2</sup>
	Op. temperature range	-40 ... 80 °C
	Operating humidity range	0 ... 100 % RH
	Road dampness	Unit: dry/damp/wet
	Slippery road conditions	Unit: no ice/snow, snow, freezing rain, ice
<b>Road surface temp./below-ground temp.</b>	Principle	NTC
	Measuring range	-40 ... 80 °C
	Accuracy	±0.1 °C (-20 ... 20 °C), else ±0.2 °C
	Resolution	0.1
<b>Freezing point</b>	Measuring range	-30 ... 0 °C
	Accuracy	±0.5°C (0...-2.5°C), else ±20% from average value (at de-icing agent NaCl)
	Resolution	0.1
<b>Water film height</b>	Principle	Radar
	Measuring range	0 ... 4 mm
	Accuracy	±(0.1 mm + 20 % of measurement)
	Resolution	0.001 mm
<b>Friction (Grip)</b>	Measuring range	0...1 (slippery...dry)
<b>Ice Percentage</b>	Measuring range	0...100%
<b>Accessories</b>	UMB Interface converter ISOCON-UMB	<b>8160.UISO</b>
	Spare part cap IRS31Pro-UMB	<b>8910.DEC</b>
	Surge protection	<b>8379.USP</b>
	Digital-analog-converter DACON8-UMB	<b>8160.UDAC</b>
	Power supply	<b>8366.USV1</b>



- Replaceable sensor electronics
- Polling via RS485 interface
- Low energy consumption (solar operation)
- Radar principle to measure water film
- Analogue outputs in combination with 8160.UDAC

# Passive Road Surface Temperature Sensor

The surface temperature sensor measures runway and highway-temperatures highly precise, both on asphalt and concrete.

Works also in conjunction with ARS31Pro-UMB.

Passive Road Surface Temperature Sensor			Order No.
<b>WST1</b> 50 m cable length			<b>8160.WST1</b>
<b>Technical data</b>	Dimensions	Ø 60 mm, height 40 mm	
	Weight	approx. 150 g	
	Storage temperature	-40 ... 70 °C	
	Protection type	IP68	
	Op. temperature range	-40 ... 70 °C	
<b>Temperature/NTC</b>	Measuring range	-40 ... 70 °C	
	Accuracy	±0.3 °C ( -10...10°C) otherwise ±1.0 °C	

Passive Road Surface Temperature Sensor			Order No.
<b>WST2</b> 50 m cable length			<b>8160.WST2</b>
<b>Technical data</b>	Dimensions	Ø 60 mm, height 40 mm	
	Weight	approx. 150 g	
	Storage temperature	-40 ... 70 °C	
	Protection type	IP68	
	Op. temperature range	-40 ... 70 °C	
<b>Temperature/PT100</b>	Measuring range	-40 ... 70 °C	
<b>1/3 DIN B</b>	Accuracy	±0.1 °C at 0 °C	
<b>Accessories</b>	UMB Interface converter ANACON-UMB		<b>8160.UANA</b>

The runway/road surface temperature sensor 8160.WST1 can be connected with any WS family sensor of Lufft UMB technology.

The runway/road surface temperature sensor 8160.WST2 can be used with Lufft ANACON-UMB converter.





Non-invasive

# Measurements ...

*... deliver freezing point temperature, is this really possible?  
Yes, because automatic freeze-free systems need this input;  
Yes, because on-time winter treatment actions are based on  
this information;  
Yes, because variable message signs can display ice risks  
automatically.*





# Lufft NIRS31-UMB – Non Invasive Measurements Using Optical Principle

Lufft road sensors use optical measuring principles. Without a need to install the embedded sensors, these non-intrusive multi-sensor-systems have integrated microprocessors to identify all road and runway conditions.

The measurement principle (optical / spectroscopical): Water absorbs certain wave lengths differently. If there is a water layer on a runway or a highway, then the spectral characteristics are changed.

## Measurement of surface conditions such as wet ice, snow, or frost.

Dependent on the requirements of any traffic-related weather network, there is a need for embedded and/or non-invasive/non-intrusive sensing equipment. Luffts NIRS31-UMB adds to Luffts series of pavement sensors: an intelligent sensor which is part of the pole or part of bridge surpassing the motorway. Mainly on bridges, which do not allow in all cases embedded sensors, the NIRS31-UMB is an alternative to Luffts IRS31-UMB. Microclimates that need frequent asphalt reconstruction prefer non-invasive technology as well to reduce the maintenance costs.

The typical distance between the surface measurement spot and the sensor is 6 ...15 meters. In addition to the well-known measurements in winter-related road networks

- waterfilm
- surface temperature
- freeze point temperature

the sensor delivers the new information "friction". Whenever the quantity of ice particles increase on the measured spot, the friction reading will be changed and herewith can be used for on-time treatments. Non-invasive sensors cannot measure depth temperature(s).

Measurement output can be accessed by the following protocols:  
UMB-Binary, SDI-12

UMB-Config-Tool Software for:

- Configuration of sensors
- Onsite calibration
- Real-time date of sensor
- Firmware-Update for UMB sensors
- Analoge outputs in combination with 8160.UDAC

Lufft NIRS31-UMB Non Invasive Sensor		Order No.
<ul style="list-style-type: none"> <li>- Measurement of surface conditions such as wetness, ice, snow, or frost.</li> <li>- Measurement of water film height</li> <li>- Measurement of ice percentage in water and determination of freeze temperature</li> <li>- Measurement of friction</li> <li>- Fully integrated surface temperature measurement (pyrometer)</li> <li>- Electric Isolation of RS485 interface for network with other UMB sensors</li> <li>- Easy to mount</li> <li>- Firmware-Updates via UMB-technology</li> </ul>		8710.UT01
Technical data	Dimensions	H. approx. 425mm, W. approx. 225mm, D. approx. 285mm
	Weight	10kg
Storage-conditions	Ambient air temperature	-40°C ... 70°C
	Ambient rel. humidity:	< 95% RH, non condensing
Operating conditions	Operating voltage	24VDC +/- 10% (22 – 30VDC)
	Power consumption	approx. 40VA
	Temperature	-40°C...60°C
	Protection type	IP65
Layer thickness	Water, Snow, Ice	
	Principle	Optical
	Measurement range	0...2mm (snow 0 ... 10 mm)
	Resolution	0.01 mm
Surface temperature	Principle	Pyrometer
	Measurement range	-40 ... 70 °C
	Accuracy	±0.8°C
	Resolution	0.1 °C
Surface conditions Friction	Dry, Damp, Wet, Snow, Ice	
	Measurement range 0 ... 1 (critical ... dry)	
Accessories	Surge protection	8379.USP
	Power supply 24V/4A	8366.USV1
	UMB Interface converter ISOCON-UMB	8160.UISO
	Digital-analog-converter DACON8-UMB	8160.UDAC
	Connection cable, 15 m incl. connector	8371.UK015
	Connection cable, 50 m incl. connector	8371.UK050





**WS600-UMB**

- Air temperature
- Relative humidity
- Precipitation intensity
- Precipitation type
- Precipitation quantity
- Air pressure
- Wind direction/speed



**WS301-UMB**

- Air temperature
- Relative humidity
- Solar radiation
- Air pressure



**NIRS31-UMB**

non-invasive road condition  
and road surface  
temperature sensor



**Sensors**

# of the Highest Quality

*It is difficult to believe that rain density can be measured, that a sensor can record the speed of precipitation and the size of the rain drops. In such cases, high-tech sensors can be extremely precise and meticulous in detail. When it is a matter of traffic safety, then Lufft Measuring Technology knows no excuses!*

# Lufft R2S-UMB – Precipitation Sensor (Present Weather Detector)

The drop speed is captured with a 24-GHz-Doppler radar.

The precipitation quantity and intensity is calculated from the correlation between drop size and speed.


The type of precipitation (rain, snow, sleet, freezing rain, hail) is detected from the difference in drop speed.

The measurement data is available for further processing in the form of a standard protocol (Lufft UMB protocol).

Lufft R2S-UMB Precipitation Sensor		Order No.
<b>R2S-UMB</b> EU, USA, Canada		<b>8367.U01</b>
<b>R2S-UMB</b> UK		<b>8367.U02</b>
<b>Technical data</b>	Resolution liquid precipitation	0.01 ... 0.1 ... 1.0 mm/m <sup>2</sup>
	Power supply	20 ... 28 VDC
	Power consumption without heating	2 VA
	Heating power	30 VA
	Op. temperature range	-40...60°C
	Op. humidity range	0 ... 100 %
	Protection	IP66
	Interface	RS485 semiduplex wire, UMB protocol, pulse and frequency interface
	Cable length	10 m
	Measuring range hail	5.1 ... approx. 30 mm
	Type of precipitation	Rain, snow, sleet, freezing rain, hail
<b>Precipitation</b>	Principle	Doppler-Radar
	Reproducibility	typ. >90 %
	Measuring range	0.3 ... 5 mm
	Drop size	
<b>Accessories</b>	UMB Interface converter ISOCON-UMB	<b>8160.UISO</b>
	Power supply 24V/4A	<b>8366.USV1</b>
	Protection shield for R2S-UMB	<b>8367.SCHIRM</b>
	Traverse for R2S-UMB, WSxxx-UMB	<b>8367.TRAV1</b>
	Surge protection	<b>8379.USP</b>
	Digital-analog-converter DACON8-UMB	<b>8160.UDAC</b>
Connection cable, 20m	<b>8370.UKAB20</b>	

Maintenance-free  
Fast response time  
Present weather detector  
Resolution 0.01 mm



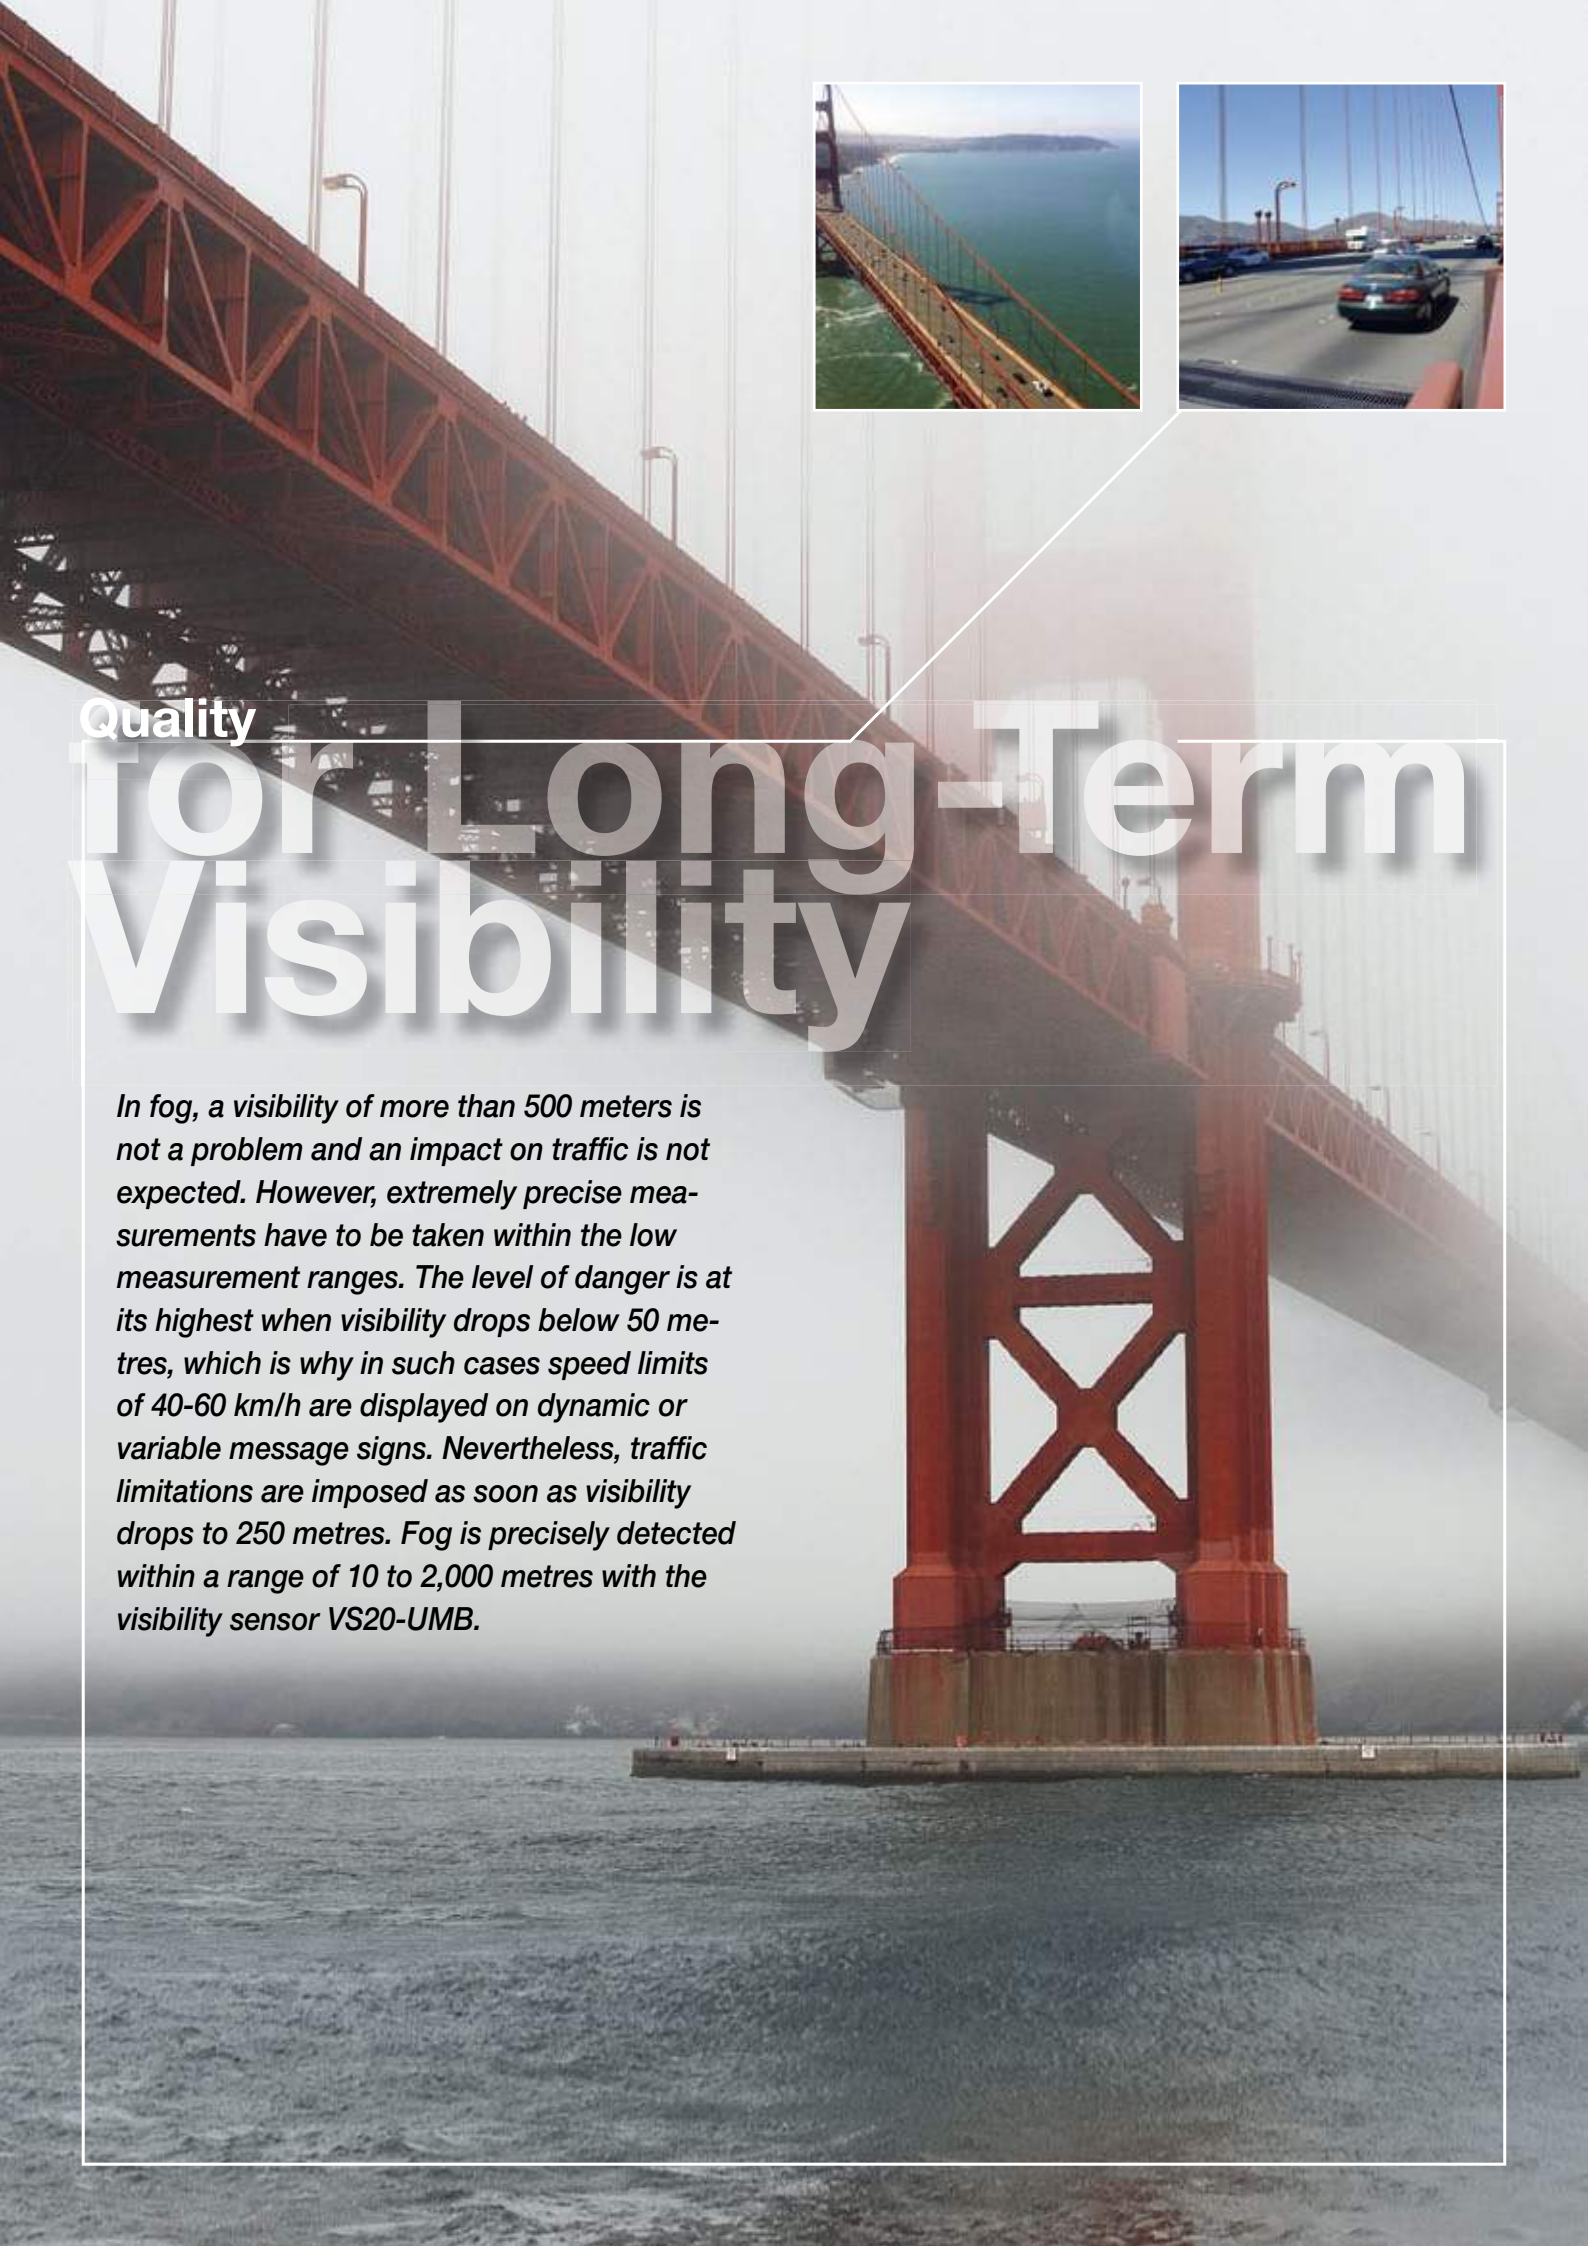

Quality

# For Long-Term Visibility

*In fog, a visibility of more than 500 meters is not a problem and an impact on traffic is not expected. However, extremely precise measurements have to be taken within the low measurement ranges. The level of danger is at its highest when visibility drops below 50 metres, which is why in such cases speed limits of 40-60 km/h are displayed on dynamic or variable message signs. Nevertheless, traffic limitations are imposed as soon as visibility drops to 250 metres. Fog is precisely detected within a range of 10 to 2,000 metres with the visibility sensor VS20-UMB.*

# Lufft VS20-UMB – Visibility Sensor

- Measures visibility up to 2000 m / 3000 m
- Ideal for road traffic applications
- Analog output 4...20 mA
- Digital UMB protocol (RS485 interface)
- Calibration device available (optional)

The VS20-UMB is configured via the software UMB Config Tool:

- Reading / Changing of the current configuration
- Calibration
- Polling of the current measurement values
- The software allows configurations to be loaded and stored

The measurement data is available for further processing in the form of a standard protocol (Lufft UMB protocol).

Lufft VS20-UMB Visibility Sensor		Order No.
<b>VS20-UMB</b>	Measuring range 10 ... 2000 m	<b>8366.U50</b>
<b>VS20-UMB</b>	Measuring range 10 ... 3000 m	<b>8366.U60</b>
<b>Technical data</b>	Output signal	4 ... 20 mA/20 ... 4 mA
	Interface	RS485 semi-duplex wire, UMB protocol
	Protection	IP66
	Weight	approx. 4 kg
	Dimensions	360 x 180 x 80 mm
	Op. temperature range	-40 ... 60 °C
	Power supply	typ. 24 VDC (22 ... 28 VDC) 3 W
	Included in delivery	Connection cable
	Value update	1 minute
<b>Visibility</b>	Cable length	10 m
	Principle	Forward scattered light procedure
	Unit	m
<b>Accessories</b>	Accuracy	±10 m or ±10 %, highest value applies
	UMB Interface converter ISOCON-UMB	<b>8160.UISO</b>
	Connecting cable	<b>8366.UKAB10</b>
	Calibration kit visibility	<b>8366.UKAL1</b>
	Power supply 24 V/4 A	<b>8366.USV1</b>
Surge protection	<b>8379.USP</b>	



10 ... 2000 m measurement range  
 Calibration kit (optional)  
 Forward light scattering technique



An Optoelectronic

# Laser Sensor

*An optoelectronic laser sensor for determining snow depths. Compact, reliable and cost-efficient: The snow depth sensor reliably determines snow depths within a measuring range of up to 10 meter within seconds and with millimeter precision.*



# Lufft SHM 30 Snow Depth Sensor

## Made in Germany by Jenoptik

### Compact, reliable and cost-efficient

The SHM 30 snow depth sensor reliably determines snow depths up to 10 meter within seconds and with millimeter precision.

Based on an opto-electronic distance sensor emitting visible eye-safe laser light, the SHM 30 allows probing distances up to 30 meter to detect the surface level. Unlike snow depth sensors using ultrasonic methods, the laser distance measuring technique is independent

of temperature changes.

Even if the measuring process is impaired by precipitation, the SHM 30 reliably finds the snow surface due to its mode of operation. Further evaluation of the transmitted signal strength allows discrimination between snow and grass.

### Benefits

- Determination of snow depth over long distances using opto-electronic measuring technique
- MTBF (mean time between failure) >40.000h (duty cycle 30% 3 measurements/min)  
The build in heater does mainly keep the build in laser diode in specs to ensure a long lifetime
- Very compact and weatherproof housing
- Efficient background light suppression
- Allows discrimination between snow and grass

### Applications

- Weather service
- Traffic and aviation safety, road surveillance
- Winter sport areas
- Water & energy related applications

Lufft SHM 30 Snow Depth Sensor		Order No.
<b>A compact laser sensor</b> with RS232, 10 m cable		<b>8365.10</b>
With RS232 and ext. heat off, 10 m cable		<b>8365.11</b>
With RS422, 10 m cable		<b>8365.20</b>
With RS422, 5 m cable		<b>8365.50</b>
<b>Technical data</b>	Dimensions (LxBxH)	302 mm x 130 mm x 234 mm
	Weight	approx. 3.3 kg
<b>Operating parameters</b>	Temperature range	-40°C ... +50°C
	Relative humidity	0% ... 100%
	Heating activity	< 0 °C (programmable)
<b>Measuring parameter</b>	Snow depth	0 ... 10 m
	Distance to hard targets <sup>(1,2)</sup>	0.1 ... 30 m
	Precision / reproducibility <sup>(2)</sup>	≤ 0.5 mm
	Measuring accuracy <sup>(2,3,4)</sup>	± 1 mm
	Measuring accuracy snow <sup>(4)</sup>	± 5 mm
	Programmable measuring interval	1 s ... 600 s
	Time to measure	≤ 10 s
<b>Interfaces</b>	Data interfaces	RS232, analog output
	Interface modes RS 232	2,4 ... 38,4 kBaud, format 8N1
	analog	3 mA und 4 ... 20 mA
	Operating modes	Polling, automatic telegram
	Client software	Any terminal program
<b>Electrical parameters</b>	Power consumption	0,5...1W (without heating) <12W (with heating) <sup>(5)</sup> ... 24W
	Power supply	10...30VDC (without heating) 15...24VDC (with heating)
<b>Safety parameters</b>	Laser classification	Laser Class 2 (IEC825-1/EN 60825)
	Environmental conditions	ISO 10109-11
	Protection class	IP65
	EMV	EN 61326-1
<b>Accessories</b>	Mounting clamp, steel, up to 80 mm Ø	<b>8365.608-11X</b>
	Mounting clamp, steel, up to 300 mm Ø	<b>8365.609-11</b>
	Mounting clamp, steel, up to 72 mm Ø	<b>8365.610-11</b>
	connecting cable 10m	<b>8365.610-14</b>
	connecting cable 20m	<b>8365.611-14</b>
	connecting cable 5m	<b>8365.612-14</b>


<sup>(1)</sup> without far field stray light protection

<sup>(4)</sup> 95% statistical spread

<sup>(2)</sup> on natural diffuse reflecting surfaces

<sup>(5)</sup> heating cycle 0 ... -30 °C, at 24 VDC

<sup>(3)</sup> offset corrected sensor

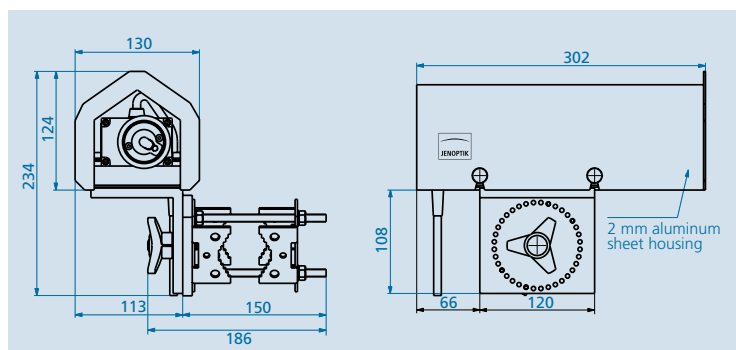



# Artificial Eye on Site

*Years ago decision makers for winter treatments had to check roads in the middle of the night;  
later they accessed measurements in their computer centers;  
today we deliver a high-resolution color picture and real-time measurements  
wherever they are ...*



# Lufft Night Vision Camera

## High Resolution Color Pictures











**Camera = "Virtual eye on site" in conjunction with measurement data.**

Images of road condition day and night in real time with infrared spotlight (option) and GPRS transmission. Creates trust and visually illustrates measurement data. Recommended especially in conjunction with ice warning systems to limit patrols to the greatest possible extent.









Lufft Night Vision Camera			Order No.
<b>Night Vision Camera</b> , high resolution, 3 Mega pixel			<b>9983.10</b>
<b>Night Vision Camera</b> , VGA resolution			<b>9983.20</b>
<b>Technical data</b>	Indoor/Outdoor	Dual lens outdoor, weather-proof (IP65), -30 ... 60 °C	
	Lenses	Wide Angle (43 mm, F 2.0)	
	Resolution	VGA (1024x768 pixels each), color + B/W	
	Sensitivity Color	1 lux (t=1/60s) 0.05 lux (t=1/1s)	
	Interfaces	Ethernet 10/100 Mbps, RS232	
	Power Supply	PoE or MX30V	
<b>Accessories</b>	Infrared spotlight LED		<b>9984.00</b>
	Surge protection		<b>8379.USP-RJ45</b>



# Lufft UMB Sensor Overview

	Wind	Temperature Rel. humidity Air pressure	Temperature Rel. humidity Air pressure Precipitation	Temperature Rel. humidity Air pressure Radiance (solar radiation)
Titan				
	Ventus			WS303
Platinum				
				WS301
Gold				
	V200A	WS300	WS400	WS304
Professional				
	WS200		WS401	WS302



Temperature Rel. humidity Air pressure Wind speed Wind direction	Temperature Rel. humidity Air pressure Wind speed Wind direction Radiance (solar radiation)	Temperature Rel. humidity Air pressure Wind speed Wind direction Precipitation	2 Channel EXPANDER	Protocols
			ANACON	UMB MODBUS ASCII SDI12
	WS503			
			ANACON	UMB MODBUS ASCII SDI12
	WS501			
			ANACON	UMB MODBUS ASCII SDI12
WS500	WS504	WS600		
			ANACON	UMB MODBUS ASCII SDI12
	WS502	WS601		





*Lufft's high-quality networks for measuring emissions consist of gas measurements, dust particle measurements, as well as meteorological measurements.*

## Precision with UMIB

*The WS product family deliver all meteorological measured data for Lufft's high-quality measuring networks. By means of the digital interface, they can be perfectly integrated into the measured data architecture of the entire system. When it comes to road traffic meteorology ("Green ITS"), quality is playing a more and more important role: In the future, traffic guidance and air pollution will depend on each other. This can only be realized with precise measured data, especially in large cities.*



# Lufft WS601-UMB – Temperature, Relative Humidity, Precipitation, Air Pressure, Wind, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Precipitation
- Air pressure
- Wind direction
- Wind speed

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Precipitation is measured by a tipping spoon and tipping bucket processes. The flexible tipping bucket allows a 0.2mm or a 0.5mm resolution of the rainfall.

Optionally, the WS601-UMB can be equipped with a leaf wetness sensor in addition.

Ultrasonic sensor technology is used to take wind measurements.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature sensor is connectable.**

Lufft WS601-UMB Smart Weather Sensor			Order No.
<b>WS601-UMB</b>			<b>8376.U01</b>
<b>Technical data</b>	Dimensions	Ø approx. 164 mm, height approx. 445 mm	
	Weight	approx. 1.7 kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C... 50 °C), otherwise ±0.5 °C (>-30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Precipitation</b>	Resolution	0.2mm / 0.5mm	
	Accuracy	±2 %	
<b>Air pressure</b>	Principle	MEMS capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	+/- 0.5 hPa (0...40°C)	
<b>Wind direction</b>	Principle	Ultrasonic	
	Measuring range	0 ... 359.9°	
	Accuracy	< 3° RMSE >1.0 m/s	
<b>Wind speed</b>	Principle	Ultrasonic	
	Measuring range	0 ... 30 m/s	
	Accuracy	±0.3 m/s or 3 % RMS	
<b>General information</b>	Heating	20VA at 24 VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Op. power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
	Op. temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Leaf wetness sensor WLW100		<b>8358.10</b>
	Temperature Sensor WT1		<b>8160.WT1</b>
	Road Surface Temperature Sensor WST1		<b>8160.WST1</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



All in One

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC



*Luffts family of digital weather sensors for all environmental applications: best precision, solar- or mains-powered, all-in-one and stand-alone versions, open interfaces, long life cycle*

Smart Sensors

# WVS Family



# Lufft WS600-UMB – Temperature, Relative Humidity, Precipitation, Air Pressure, Wind, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Precipitation intensity
- Precipitation type
- Precipitation quantity
- Air pressure
- Wind direction
- Wind speed

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Precipitation is measured by a 24 GHz Doppler radar, which measures the drop speed of an individual drop of rain/snow.

Precipitation quantity and intensity are calculated from the correlation between drop size and speed.

The difference in drop speed determines the type of precipitation (rain/snow).

Maintenance-free measurement offers a major advantage over the common tipping spoon and tipping bucket processes.

Ultrasonic sensor technology is used to take wind measurements.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature sensor is connectable.**

All in One

Aspirated temperature/humidity measurement

Maintenance-free operation

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC

Lufft WS600-UMB Smart Weather Sensor			Order No.
<b>WS600-UMB</b> EU, USA, Canada			<b>8370.U01</b>
<b>WS600-UMB</b> UK			<b>8370.U02</b>
<b>Technical data</b>	Dimensions	Ø approx. 150mm, height approx. 343mm	
	Weight	approx. 1.5kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (> -30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Precipitation quantity</b>	Resolution	0.01 mm	
	Measuring range	Drop size 0.3 ... 5mm	
	Reproducibility	typ. >90 %	
<b>Precipitation type</b>	Rain/snow		
<b>Air pressure</b>	Principle	MEMS capacitive	
	Measuring range	300 ... 1200hPa	
	Accuracy	+/- 0.5 hPa (0...40°C)	
<b>Wind direction</b>	Principle	Ultrasonic	
	Measuring range	0 ... 359.9°	
	Accuracy	< 3° RMSE >1.0m/s	
<b>Wind speed</b>	Principle	Ultrasonic	
	Measuring range	0 ... 75 m/s	
	Accuracy	±0.3m/s or 3% (0 ... 35m/s) RMS of reading, whichever is greater ±5% (>35m/s) RMS	
<b>General Information</b>	Heating	40VA at 24VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Op. power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
	Op. temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Temperature Sensor WT1		<b>8160.WT1</b>
	Road Surface Temperature Sensor WST1		<b>8160.WST1</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



# Lufft WS504-UMB – Tilttable Pyranometer, Wind, Temperature, Air Pressure, Relative Humidity, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure
- Wind direction
- Wind speed
- Solar radiation

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Ultrasonic sensor technology is used to take wind measurements.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS .

**One external temperature or rain sensor is connectable.**

Lufft WS504-UMB Smart Weather Sensor			Order No.
<b>WS504-UMB</b>			<b>8375.U12</b>
<b>Technical data</b>	Dimensions	Ø approx. 150mm, height 377 mm	
	Weight	approx. 1.5 kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (> -30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Radiation</b>	Response time (95%)	< 1s	
	Spectral range	300 to 1100 nm	
	Measuring range	1400 W/m <sup>2</sup>	
<b>Air pressure</b>	Principle	MEMS capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	±0.5 hPa (0 ... 40°C)	
<b>Wind direction</b>	Principle	Ultrasonic	
	Measuring range	0 ... 359.9°	
	Accuracy	< 3° RMSE >1.0 m/s	
<b>Wind speed</b>	Principle	Ultrasonic	
	Measuring range	0 ... 75 m/s	
	Accuracy	±0.3 m/s or 3% (0 ... 35 m/s) RMS of reading, whichever is greater ±5% (> 35 m/s) RMS	
<b>General information</b>	Heating	20 VA at 24 VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Operating power consumption	4 ... 32 VDC	
	Operating humidity range	0 ... 100 %	
	Operating temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DAICON8-UMB		<b>8160.UDAC</b>
	Temperature sensor WT1		<b>8160.WT1</b>
	Road surface Temperature sensor WST1		<b>8160.WST1</b>
	Rain sensor WTB100		<b>8353.10</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



All in One

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS

- Analogue outputs in combination with 8160.UDAC

Third-party rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.



# Lufft WS503-UMB – Tilttable Pyranometer, Wind, Temperature, Air Pressure, Relative Humidity, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure
- Wind direction
- Wind speed
- Solar radiation

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

The world renowned technology of Kipp+Zonen CMP3 is integrated.

Ultrasonic sensor technology is used to take wind measurements.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS.

**One external temperature or rain sensor is connectable.**

Lufft WS503-UMB Smart Weather Sensor			Order No.
<b>WS503-UMB</b>			<b>8375.U11</b>
<b>Technical data</b>	Dimensions	Ø approx. 150 mm, height 392mm	
	Weight	approx. 1.5 kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (>-30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Radiation</b>	Response time (95%)	< 18s	
	Non-stability (change/year)	< 1%	
	Non-linearity (0 to 1,000 W/m²)	< 1%	
	Directional error (at 80° with 1,000 W/m²)	< 20 W/m²	
	Temperature dependence of sensitivity	< 5% (-10 to 40 °C)	
	Tilt error (at 1000 W/m²)	< 1%	
	Spectral range (50% points)	300 to 2,800 nm	
	Measuring range	1400 W/m²	
	Altitude	0 ... 60°	
<b>Air pressure</b>	Azimuth	-10° ... 10°	
	Principle	MEMS capacitive	
<b>Wind direction</b>	Measuring range	300 ... 1200 hPa	
	Accuracy	±0.5 hPa (0 ... 40°C)	
	Principle	Ultrasonic	
<b>Wind speed</b>	Measuring range	0 ... 359.9°	
	Accuracy	< 3° RMSE >1.0 m/s	
	Principle	Ultrasonic	
<b>General information</b>	Measuring range	0 ... 75 m/s	
	Accuracy	±0.3 m/s or 3% (0 ... 35 m/s) RMS of reading, whichever is greater ±5% (>35 m/s) RMS	
	Heating	20 VA at 24 VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Operating power consumption	4...32 VDC	
<b>Accessories</b>	Operating humidity range	0 ... 100 %	
	Operating temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DAICON8-UMB		<b>8160.UDAC</b>
	Temperature sensor WT1		<b>8160.WT1</b>
	Road surface temperature sensor WST1		<b>8160.WST1</b>
	Connection cable, 20m		<b>8370.UKAB20</b>
	Rain sensor WTB100		<b>8353.10</b>



Tilttable Pyranometer

Ultrasonic wind sensor

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC

Third-party-rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.



# Lufft WS502-UMB – Temperature, Relative Humidity, Radiation, Air Pressure, Wind, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure
- Wind direction
- Wind speed
- Solar radiation

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Ultrasonic sensor technology is used to take wind measurements.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature or rain sensor is connectable.**



All in One

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS

- Analogue outputs in combination with 8160.UDAC

Third-Party-Rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.

Lufft WS502-UMB Smart Weather Sensor		Order No.
<b>WS502-UMB</b>		<b>8375.U10</b>
<b>Technical Data</b>	Dimensions	Ø approx. 150mm, height 317mm
	Weight	approx. 1.5 kg
<b>Temperature</b>	Principle	NTC
	Measuring range	-50 ... 60 °C
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (> -30 °C)
<b>Relative humidity</b>	Principle	Capacitive
	Measuring range	0 ... 100 % RH
	Accuracy	±2 % RH
<b>Radiation</b>	Response time (95%)	< 1s
	Spectral range	300 to 1100 nm
	Measuring range	1400 W/m <sup>2</sup>
<b>Air pressure</b>	Principle	MEMS capacitive
	Measuring range	300 ... 1200 hPa
	Accuracy	+/- 0.5 hPa (0...40°C)
<b>Wind direction</b>	Principle	Ultrasonic
	Measuring range	0 ... 359.9°
	Accuracy	< 3° RMSE >1.0 m/s
<b>Wind speed</b>	Principle	Ultrasonic
	Measuring range	0 ... 75 m/s
	Accuracy	±0.3 m/s or 3% (0...35 m/s) RMS of reading, whichever is greater ±5% (>35 m/s) RMS
<b>General Information</b>	Heating	20VA at 24 VDC
	Protection type housing	IP66
	Interface	RS485, 2-wire, half-duplex
	Operating power consumption	4...32 VDC
	Operating humidity range	0 ... 100 %
Operating temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection	8379.USP
	Power supply 24V/4A	8366.USV1
	UMB Interface converter ISOCON-UMB	8160.UISO
	Digital-analog-converter DAICON8-UMB	8160.UDAC
	Temperature Sensor WT1	8160.WT1
	Road Surface Temperature Sensor WST1	8160.WST1
	Rain Sensor WTB100	8353.10
	Connection cable, 20m	8370.UKAB20



# Lufft WS501-UMB – Temperature, Relative Humidity, Radiation, Air Pressure, Wind, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure
- Wind direction
- Wind speed
- Solar radiation

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

The world renowned technology of Kipp+Zonen CMP3 is integrated.

Ultrasonic sensor technology is used to take wind measurements.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature or rain sensor is connectable.**

Lufft WS501-UMB Smart Weather Sensor			Order No.
<b>WS501-UMB</b>			<b>8375.U01</b>
<b>Technical Data</b>	Dimensions	Ø approx. 150 mm, height 332 mm	
	Weight	approx. 1.5 kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (>-30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Radiation</b>	Response time (95%)	< 18s	
	Non-stability (change/year)	< 1%	
	Non-linearity (0 to 1,000 W/m²)	< 1%	
	Directional error (at 80° with 1,000 W/m²)	< 20W/m²	
	Temperature dependence of sensitivity	< 5 % (-10 to 40 °C)	
	Tilt error (at 1000 W/m²)	< 1%	
	Spectral range (50% points)	300 to 2,800 nm	
	Measuring range	1400 W/m²	
<b>Air pressure</b>	Principle	MEMS capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	+/- 0.5 hPa (0...40°C)	
<b>Wind direction</b>	Principle	Ultrasonic	
	Measuring range	0 ... 359.9°	
	Accuracy	< 3° RMSE >1.0 m/s	
<b>Wind speed</b>	Principle	Ultrasonic	
	Measuring range	0 ... 75 m/s	
<b>General Information</b>	Accuracy	±0.3 m/s or 3% (0...35 m/s) RMS of reading, whichever is greater ±5% (>35 m/s) RMS	
	Heating	20 VA at 24 VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Operating power consumption	4...32 VDC	
	Operating humidity range	0 ... 100%	
<b>Accessories</b>	Operating temperature range	-50 ... 60 °C	
	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Temperature Sensor WT1		<b>8160.WT1</b>
	Road Surface Temperature Sensor WST1		<b>8160.WST1</b>
	Connection cable, 20m		<b>8370.UKAB20</b>
	Rain Sensor WTB100		<b>8353.10</b>



All in One

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC

Third-Party-Rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.



# Lufft WS500-UMB – Temperature, Air Pressure, Relative Humidity, Wind, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure
- Wind direction
- Wind speed

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Ultrasonic sensor technology is used to take wind measurements.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature or rain sensor is connectable.**



Lufft WS500-UMB Smart Weather Sensor			Order No.
<b>WS500-UMB</b>			<b>8373.U01</b>
<b>Technical Data</b>	Dimensions	Ø approx. 150mm, height approx 287mm	
	Weight	approx. 1.2kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (> -30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Air pressure</b>	Principle	MEMS Capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	+/- 0.5 hPa (0...40°C)	
<b>Wind direction</b>	Principle	Ultrasonic	
	Measuring range	0 ... 359.9°	
	Accuracy	< 3° RMSE >1.0 m/s	
<b>Wind speed</b>	Principle	Ultrasonic	
	Measuring range	0 ... 75 m/s	
	Accuracy	±0.3 m/s or 3 % (0 ... 35 m/s) RMS of reading, whichever is greater ±5 % (>35 m/s) RMS	
<b>General Information</b>	Heating	20 VA at 24 VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Op. power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
	Op. temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Temperature Sensor WT1		<b>8160.WT1</b>
	Road Surface Temperature Sensor WST1		<b>8160.WST1</b>
	Rain Sensor WTB100		<b>8353.10</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



Ultrasonic wind sensor

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS

- Analogue outputs in combination with 8160.UDAC

Third-Party-Rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.

# Lufft WS401-UMB – Temperature, Relative Humidity, Precipitation, Air Pressure

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Precipitation
- Air pressure

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Optionally, the WS401-UMB can be equipped with a leaf wetness sensor in addition.

Precipitation is measured by tipping spoon and tipping bucket processes. The flexible tipping bucket allows a 0.2mm or a 0.5mm resolution of the rainfall.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

Lufft WS401-UMB Smart Weather Sensor			Order No.
<b>WS401-UMB</b>			<b>8377.U01</b>
<b>Technical Data</b>	Dimensions	Ø approx. 165mm, height approx. 380 mm	
	Weight	approx. 1.5 kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C... 50 °C), otherwise ±0.5 °C (> -30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Precipitation</b>	Resolution	0.2 mm / 0.5mm	
	Accuracy	±2 %	
<b>Air pressure</b>	Principle	MEMS Capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	+/- 0.5 hPa (0...40°C)	
<b>General Information</b>	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Op. power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
	Op. temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Leaf wetness sensor WLW100		<b>8358.10</b>
	Temperature Sensor WT1		<b>8160.WT1</b>
	Road Surface Temperature Sensor WST1		<b>8160.WST1</b>
Connection cable, 20m		<b>8370.UKAB20</b>	



**One external temperature sensor is connectable.**

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC



# Lufft WS400-UMB – Temperature, Relative Humidity, Precipitation, Air Pressure

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Precipitation intensity
- Precipitation type
- Precipitation quantity
- Air pressure

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Precipitation is measured by a 24 GHz Doppler radar, which measures the drop speed of an individual drop of rain/snow.

Precipitation quantity and intensity are calculated from the correlation between drop size and speed.

The difference in drop speed determines the type of precipitation (rain/snow). Maintenance-free measurement offers a major advantage over the common tipping spoon and tipping bucket processes.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature sensor is connectable.**

Lufft WS400-UMB Smart Weather Sensor			Order No.
<b>WS400-UMB</b> EU, USA, Canada			<b>8369.U01</b>
<b>WS400-UMB</b> UK			<b>8369.U02</b>
<b>Technical Data</b>	Dimensions	Ø approx. 150mm, height approx. 280mm	
	Weight	approx. 1.3kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50...60 °C	
	Accuracy	±0.2 °C (-20 °C...50 °C), otherwise ±0.5 °C (>-30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0...100 % RH	
	Accuracy	±2 % RH	
<b>Precipitation quantity</b>	Resolution	0.01 mm	
	Measuring range	Measuring range drop size 0.3...5 mm	
	Reproducibility	typ. >90 %	
<b>Precipitation type</b>	Rain/snow		
<b>Air pressure</b>	Principle	MEMS Capacitive	
	Measuring range	300...1200 hPa	
	Accuracy	+/- 0.5 hPa (0...40°C)	
	Heating	20VA at 24VDC	
<b>General Information</b>	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Op. power consumption	4...32 VDC	
	Operating humidity range	0...100 %	
	Op. temperature range	-50...60 °C	
	<b>Accessories</b>	Surge protection	
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Temperature Sensor WT1		<b>8160.WT1</b>
	Road Surface Temperature Sensor WST1		<b>8160.WST1</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



Aspirated temperature/humidity measurement

Maintenance-free operation

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC

# Lufft WS304-UMB – Tiltable Pyranometer, Temperature, Air Pressure, Relative Humidity, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure
- Solar Radiation

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS .

**One external temperature or rain sensor is connectable.**

Lufft WS304-UMB Smart Weather Sensor			Order No.
<b>WS304-UMB</b>			<b>8374.U12</b>
<b>Technical Data</b>	Dimensions	Ø approx. 150mm, height 377 mm	
	Weight	approx. 1.5 kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (> -30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Radiation</b>	Response time (95%)	< 1s	
	Spectral range	300 to 1100 nm	
	Measuring range	1400 W/m <sup>2</sup>	
<b>Air pressure</b>	Principle	MEMS capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	±0.5 hPa (0 ... 40°C)	
<b>General Information</b>	Heating	20 VA at 24 VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Operating power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
	Operating temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Temperature Sensor WT1		<b>8160.WT1</b>
	Road Surface Temperature Sensor WST1		<b>8160.WST1</b>
	Rain Sensor WTB100		<b>8353.10</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



All in One

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS

- Analogue outputs in combination with 8160.UDAC

Third-Party-Rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.

# Lufft WS303-UMB – Tilttable Pyranometer, Temperature, Air Pressure, Relative Humidity, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure
- Solar radiation

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

The world renowned technology of Kipp+Zonen CMP3 is integrated.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS.

**One external temperature or rain sensor is connectable.**



Tilttable Pyranometer

Ultrasonic wind sensor

Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC

Third-party rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.

Lufft WS303-UMB Smart Weather Sensor			Order No.
<b>WS303-UMB</b>			<b>8374.U11</b>
<b>Technical data</b>	Dimensions	Ø approx. 150 mm, height 392mm	
	Weight	approx. 1.5 kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (>-30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Radiation</b>	Response time (95%)	< 18s	
	Non-stability (change/year)	< 1%	
	Non-linearity (0 to 1,000 W/m²)	< 1%	
	Directional error (at 80° with 1,000 W/m²)	< 20 W/m²	
	Temperature dependence of sensitivity	< 5% (-10 bis 40 °C)	
	Tilt error (at 1000 W/m²)	< 1%	
	Spectral range (50% points)	300 to 2,800 nm	
	Measuring range	1400 W/m²	
	Altitude	0 ... 60°	
	Azimuth	-10° ... 10°	
<b>Air pressure</b>	Principle	MEMS capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	±0.5 hPa (0 ... 40°C)	
<b>General Information</b>	Heating	20 VA at 24 VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Operating power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
Operating temperature range	-50 ... 60 °C		
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Temperature sensor WT1		<b>8160.WT1</b>
	Road surface temperature sensor WST1		<b>8160.WST1</b>
	Rain sensor WTB100		<b>8353.10</b>
	Connection cable, 20m		<b>8370.UKAB20</b>





# Lufft WS302-UMB – Temperature, Relative Humidity, Radiation, Air Pressure

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Solar radiation
- Air pressure

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature or rain sensor is connectable.**

Lufft WS302-UMB Smart Weather Sensor			Order No.
<b>WS302-UMB</b>			<b>8374.U10</b>
<b>Technical data</b>	Dimensions	Ø approx. 150 mm, height 253 mm	
	Weight	approx. 1.3 kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (> -30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Radiation</b>	Response time (95%)	< 1s	
	Spectral range	300 to 1100 nm	
	Measuring range	1400 W/ m <sup>2</sup>	
<b>Air pressure</b>	Principle	MEMS Capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	+/- 0.5 hPa (0...40°C)	
<b>General Information</b>	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Op. power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
	Op. temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Temperature sensor WT1		<b>8160.WT1</b>
	Road surface temperature sensor WST1		<b>8160.WST1</b>
	Rain sensor WTB100		<b>8353.10</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS

- Analogue outputs in combination with 8160.UDAC

Third-party-rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.

# Lufft WS301-UMB – Temperature, Relative Humidity, Radiation, Air Pressure

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Solar radiation
- Air pressure

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

The world renowned technology of Kipp+Zonen CMP3 is integrated.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature or rain sensor is connectable.**



Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC

Third-party rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.

Lufft WS301-UMB Smart Weather Sensor			Order No.
<b>WS301-UMB</b>			<b>8374.U01</b>
<b>Technical data</b>	Dimensions	Ø approx. 150mm, height 268mm	
	Weight	approx. 1.3kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (> -30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Radiation</b>	Response time (95%)	< 18s	
	Non-stability (change/year)	< 1%	
	Non-linearity (0 to 1,000 W/m²)	< 1%	
	Directional error (at 80 ° with 1,000W/m²)	< 20W/m²	
	Temperature dependent of sensitivity	< 5% (-10 bis 40 ° C)	
	Tilt error (at 1000W/m²)	< 1%	
	Spectral range (50% points)	300 to 2,800nm	
<b>Air pressure</b>	Measuring range	1400W/ m²	
	Principle	MEMS Capacitive	
	Measuring range	300 ... 1200hPa	
<b>General Information</b>	Accuracy	±0.5 hPa (0 ... 40°C)	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Op. power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
<b>Accessories</b>	Op. temperature range	-50 ... 60 °C	
	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DAICON8-UMB		<b>8160.UDAC</b>
	Temperature sensor WT1		<b>8160.WT1</b>
	Road surface temperature sensor WST1		<b>8160.WST1</b>
	Rain sensor WTB100		<b>8353.10</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



# Lufft WS300-UMB – Temperature, Air Pressure, Relative Humidity

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure

Relative humidity is measured by means of a capacitive sensor element; a precision NTC measuring element is used to measure air temperature.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature or rain sensor is connectable.**

Lufft WS300-UMB Smart Weather Sensor			Order No.
<b>WS300-UMB</b>			<b>8372.U01</b>
<b>Technical data</b>	Dimensions	Ø approx. 150 mm, height approx. 223 mm	
	Weight	approx. 1.0 kg	
<b>Temperature</b>	Principle	NTC	
	Measuring range	-50 ... 60 °C	
	Accuracy	±0.2 °C (-20 °C ... 50 °C), otherwise ±0.5 °C (> -30 °C)	
<b>Relative humidity</b>	Principle	Capacitive	
	Measuring range	0 ... 100 % RH	
	Accuracy	±2 % RH	
<b>Air pressure</b>	Principle	MEMS Capacitive	
	Measuring range	300 ... 1200 hPa	
	Accuracy	±0.5 hPa (0 ... 40 °C)	
<b>General information</b>	Interface	RS485, 2-wire, half-duplex	
	Protection type housing	IP66	
	Op. power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
	Op. temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Temperature sensor WT1		<b>8160.WT1</b>
	Road surface temperature sensor WST1		<b>8160.WST1</b>
	Rain sensor WTB100		<b>8353.10</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



Aspirated temperature/humidity measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC

Third-party-rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.

# Lufft WS200-UMB – Ultrasonic Wind Sensor, Electronic Compass

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design for measuring:

- Wind direction
- Wind speed

Ultrasonic sensor technology is used to take wind measurements.

Measurement output can be accessed by the following protocols:  
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

**One external temperature or rain sensor is connectable.**

Lufft WS200-UMB Smart Weather Sensor			Order No.
<b>WS200-UMB</b>			<b>8371.U01</b>
<b>Technical data</b>	Dimensions	Ø approx. 150mm, height approx. 194mm	
	Weight	approx. 0.8 kg	
<b>Wind direction</b>	Principle	Ultrasonic	
	Measuring range	0 ... 359.9°	
	Accuracy	< 3° RMSE > 1.0 m/s	
<b>Wind speed</b>	Principle	Ultrasonic	
	Measuring range	0 ... 75 m/s	
	Accuracy	±0.3 m/s or 3% (0 ... 35 m/s) RMS of reading, whichever is greater ±5% (> 35 m/s) RMS	
<b>General information</b>	Heating	20VA at 24VDC	
	Protection type housing	IP66	
	Interface	RS485, 2-wire, half-duplex	
	Op. power consumption	4...32 VDC	
	Operating humidity range	0 ... 100 %	
	Op. temperature range	-50 ... 60 °C	
<b>Accessories</b>	Surge protection		<b>8379.USP</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB interface converter ISOCON-UMB		<b>8160.UISO</b>
	Digital-analog-converter DACON8-UMB		<b>8160.UDAC</b>
	Temperature sensor WT1		<b>8160.WT1</b>
	Road surface temperature sensor WST1		<b>8160.WST1</b>
	Rain sensor WTB100		<b>8353.10</b>
	Connection cable, 20m		<b>8370.UKAB20</b>



#### Ultrasonic wind measurement

Open communication protocol:

- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analogue outputs in combination with 8160.UDAC

Third-party-rain gauge sensors are compatible: 0.1 mm, 0.2 mm, 0.5 mm, 1mm heated and unheated.

# Lufft WTB100 External Rain Gauge

Lufft WTB100 Rain Gauge		Order No.
<b>Rain gauge</b> 0.2 mm unheated		<b>8353.10</b>
<b>Rain Gauge with bounce-free reed contact (normally closed)</b>		
<b>Technical data</b>	Dimensions	Ø165 mm, height 285 mm
	Connection type	Open cable ends
	Collecting area	200 cm <sup>2</sup>
	Resolution	0.2 mm and 0.5 mm (tipping bucket), adjustment by reduction ring
	Weight	930 g
	Mounting type	On mast, Ø 60-76 mm
	Accuracy	± 2%



Lufft Rain Gauge		Order No.
<b>Rain gauge</b> 0.1 mm unheated		<b>8353.13</b>
<b>Rain gauge</b> 0.1 mm heated		<b>8353.13H</b>
<b>Technical data</b>	Dimensions	Ø 190 mm, Height 292 mm
	Connection type	Open cable ends
	Collecting area	200 cm <sup>2</sup>
	Resolution	0.1 mm (tipping bucket)
	Weight	approx. 4 kg
	Mounting type	On mast, Ø 60 mm
	Operating temp. range, rain gauge unheated	0 ... 70 °C
	Operating temp. range, rain gauge heated	-30 ... 70 °C
Heating	42 V/AC, 170 VA	
<b>Accessories</b>	Power supply for heated probe 8353.13H	<b>8353.SV1</b>
	Stand, height 1 m for 8353.13	<b>8353.FUS2</b>
	Stand, height 1 m for 8353.13H	<b>8353.FUS3</b>



Lufft Rain Gauge		Order No.
<b>Rain gauge</b> 0.1 mm unheated		<b>8353.12</b>
<b>Rain gauge</b> 0.1 mm heated		<b>8353.12H</b>
<b>Technical data</b>	Dimensions	Ø 190 mm, height 292 mm
	Connection type	Open cable ends
	Collecting area	200 cm <sup>2</sup>
	Resolution	0.1 mm (tipping bucket)
	Weight	approx. 3 kg
	Mounting type	On mast, Ø 60 mm
	Operating temp. range, rain gauge unheated	0 ... 70 °C
	Operating temp. range, rain gauge heated	-20 ... 70 °C
Heating	24 VDC 150 W	
<b>Accessories</b>	Power supply for heated probe 8353.12H	<b>8366.USV2</b>
	Stand, height 1 m for 8353.12	<b>8353.FUS2</b>
	Stand, height 1 m for 8353.12H	<b>8353.FUS3</b>





## A Passion for Precision

# VENTUS

*VENTUS ultrasonic cold weather anemometer was tested under MIL standard-810F method 521.2 proving success in ice free operation. Ventus is corrosion tested for seawater and vibration resistance. It gives the best accuracy with maintenance-free operation.*

*HALT test*

*Vibration test According to IEC 60945*

*Corrosion test According to MIL-STD-810  
Method 509.3*

*Ice-free test According to MIL-STD-810F  
Method 521.2*

*Now UL-certified  
Underwriters Laboratories Inc.*



# Lufft VENTUS-UMB– Ultrasonic Wind Sensor

## Metal Housing, 240W-Heater



**Extremely precise and maintenance-free measurement of wind velocity and wind direction, as well as calculation of acoustic virtual temperature.**

Belongs to Lufft's WS family of professional intelligent sensors with digital and analog interfaces.

The ultrasonic wind sensor is designed without mechanical parts – traditionally known as “cups and vane”.

The digital or analog output delivers instantaneous, average, min or max value with flexible measuring rate. The VENTUS is heated in case of critical ambient conditions. Made for cold climates!

### Recommended for:

- Wind turbines
- Marine/ships
- Meteorology
- Building automation

### The following outputs/protocols are available:

- NMEA
- UMB-ASCII
- UMB-Binary
- MODBUS (ASCII, RTU)
- SDI-12
- 4 ... 20mA, 0...10V, 0...20 mA, 2...10V frequency (analog)

Lufft VENTUS-UMB Wind Sensor		Order No.
<b>VENTUS-UMB for wind energy applications</b>		<b>8371.UMT</b>
<b>Technical data</b>	Dimensions	Ø approx. 150mm, height approx. 170mm
	Weight	approx. 1.62 kg
<b>Wind direction</b>	Principle	Ultrasonic
	Measuring range	0 ... 359.9°
	Resolution	0.1°
	Accuracy	<2° RMSE >1.0m/s
	Start-up threshold	0.1 m/s
	Measuring rate	60 partial measurements/ 15 measurements per second
	Measurement output rate	1-10 seconds adjustable – default 10 s
<b>Wind speed</b>	Principle	Ultrasonic
	Measuring range	0 ... 90m/s
	Resolution	0.1 m/s
	Accuracy	±0.2m/s or ± 2 % RMS of reading, whichever is greater (0...65m/s) else ±5%
	Start-up threshold	0.1 m/s
	Measuring rate	60 partial measurements/ 15 measurements per second
	Measurement output rate	1-10 seconds adjustable – default 10 s
<b>Virtual temperature</b>	Principle	Ultrasonic
	Measuring range	-50 ... 70 °C
	Resolution	0.1 °C
	Accuracy	± 2.0 °C (without heater and without sun exposure or wind > 4m/s)
	Measuring rate	60 partial measurements/ 15 measurements per second
<b>Air pressure</b>	Principle	MEMS Capacitive
	Measuring range	300 ... 1200 hPa
	Accuracy	±1.5 hPa
<b>Data output digital</b>	Interface	RS485 semi-/full duplex, isolated
	Baudrate	1200-57600
	Meas. rate instant. value	1-10 s
	Measuring rate Avg (arithmetic, vector)	1-10 min
	Status	Heating, sensor failure
<b>Data output analog</b>	Only semi-duplex mode	
	Output signal	0 ... 20 mA, 4 ... 20 mA, 0 ... 10V, 2 ... 10V, 2 ... 2,000 Hz only output 1 (instantaneous, avg, min, max)
	Load	max. 500 Ohm
	Resolution	16 Bit
<b>General information</b>	Operating temperature	-40 ... 60 °C (with heating) -20 ... 60 °C (without heating)
	Bus operation	Up to 32 devices
	Operating voltage electronics	24 VDC ±10 % or 24 VDC/1.2 VA without heating 12 VDC
	with heating	24 VDC, max. 240 VA (140W + 100W)
	Connection	8-pole plug
	Housing material	Aluminum, seawater-proof
	Protection	IP66
	Pole diameter	50 mm/2"
	Factory certificate	yes
	<b>Accessories</b>	Surge protection
Power supply 24V/10A		<b>8366.USV2</b>
UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
Connection cable, 15 m incl. connector		<b>8371.UK015</b>
Connection cable, 50 m incl. connector		<b>8371.UK050</b>
Connector		<b>8371.UST1</b>



Maintenance-free

# Measuring





# Lufft V200A-UMB – Ultrasonic Wind Sensor

## Plastic Housing, 20 W-Heater



**Extremely precise and maintenance-free measurement of wind velocity and wind direction as well as calculation of acoustic virtual temperature.**

Belongs to Lufft's WS family of professional intelligent sensors with digital and analog interfaces.

The ultrasonic wind sensor is designed without mechanical parts – traditionally known as "cups and vane".

The digital or analog output delivers instantaneous, average, min or max value with flexible measuring rate. The V200A is heated to remove frost and ice formation from the sensor.

### Recommended for:

- Meteorology
- Building automation

### The following outputs/protocols are available:

- NMEA
- UMB-ASCII
- UMB-Binary
- MODBUS (ASCII, RTU)
- SDI-12
- 4 ... 20 mA, 0...10V, 0...20mA, 2...10V frequency (analog)

Lufft V200A-UMB Ultrasonic Wind Sensor			Order No.
<b>V200A-UMB</b>			<b>8371.UA01</b>
<b>Technical data</b>	Dimensions	Ø approx. 150 mm, height approx. 170 mm	
	Weight	approx. 0.8 kg	
<b>Wind direction</b>	Principle	Ultrasonic	
	Measuring range	0 ... 359.9°	
	Resolution	0.1° (standard)	
	Accuracy	< 3° RMSE >1.0 m/s	
	Start-up Threshold	0.3 m/s	
	Measuring rate	60 partial measurements/ 15 measurements per second	
	Measurement output rate	1-10 seconds adjustable – default 10 s	
<b>Wind speed</b>	Principle	Ultrasonic	
	Measuring range	0 ... 75 m/s	
	Resolution	0.1 m/s	
	Accuracy	±0.3 m/s or 3% (0 ... 35 m/s) RMS of reading, whichever is greater ±5% (>35 m/s) RMS	
	Start-up threshold	0.3 m/s	
	Measuring rate	60 partial measurements/ 15 measurements per second	
	Measurement output rate	1-10 seconds adjustable – default 10 s	
<b>Virtual temperature</b>	Unit	m/s; km/h; mph; kts	
	Principle	Ultrasonic	
	Measuring range	-50 °C ... 70 °C	
	Resolution	0.1 °K	
<b>Air pressure</b>	Accuracy	± 2.0 K (without heater and without sun exposure or wind >4ms)	
	Measuring rate	60 partial measurements/ 15 measurements per second	
	Measurement output rate	1-10 seconds adjustable – default 10 s	
	Principle	MEMS Capacitive	
<b>Data output digital</b>	Measuring range	300 ... 1200 hPa	
	Accuracy	+/- 0.5h Pa (0...40°C)	
	Interface	RS485 semi-/full duplex, isolated	
	Baudrate	1200-57600	
	Meas. rate instant. value	1-10 s	
<b>Data output analog</b>	Measuring rate Avg (arithmetic, vector), Min, Max	1-10 min	
	Status	Heating, sensor failure	
	Only semi-duplex mode		
	Output signal	0 ... 20 mA, 4 ... 20 mA, 0 ... 10V, 2 ... 10V, 2 ... 2,000 Hz only output 1 (instantaneous, avg, min, max)	
	Load	max. 500 Ohm	
<b>General information</b>	Resolution	16 Bit	
	Operating temperature	-40 ... 60 °C (with heating)	
	Bus operation	Up to 32 devices	
	Operating voltage electronics	24 VDC ±10% or 24 VDC/1,2 VA without heating: 12 VDC	
	with heating	24 VDC, max. 20 VA	
	Connection	8-pole plug	
	Housing material	Plastic	
	Protection	IP66	
	Pole diameter	50 mm/2"	
	Factory certificate	yes	
<b>Accessories</b>	Surge protection		<b>8379.USP-V</b>
	Power supply 24V/4A		<b>8366.USV1</b>
	UMB Interface converter ISOCON-UMB		<b>8160.UISO</b>
	Connection cable, 15 m incl. connector		<b>8371.UK015</b>
	Connection cable, 50 m incl. connector		<b>8371.UK050</b>
	Connector		<b>8371.UST1</b>



# Modem

Mobile GSM router		Order No.
<b>Mobile GSM router</b> (without figure) Modem for UMB and camera, "dual use"		<b>8160.MOD-INSYS</b>
RWIS applications with high-resolution pictures (jpg) need a modem including an integrated industrial Ethernet switch. A lean hardware solution together with the Lufft LCOM 8510.EAK. The modem requires less space in the enclosure. It is very easy to configure the device. The modem supports not only GPRS, but UMTS in addition. Made for DIN-rail-mounting.		
<b>Optional</b>	Modem without Ethernet switch (see figure)	<b>8160.MOD-VIOLA</b>



GPRS Modem	Order No.
<b>GPRS Modem</b> in conjunction with LCOM	<b>8511.GPRS</b>



Fold-Over mast, hot-dip galvanized		Order No.
<b>Fold-Over mast</b>		<b>8357.450</b>
<b>Technical data</b>	Dimensions Length 450cm	
<b>Accessories</b>	Metal box, small, for 8357.450 Dimensions 120 mm height x 360 mm wide x 80 mm deep	<b>8357.CAS1</b>
	Cabinet, large Dimensions 600 mm height x 400 mm wide x 210 mm deep	<b>8357.CAS2</b>
	Cabinet UMB, for Lufft pole 8357.450 8357.CAS3 (incl. mounting rails, wiring channel, plug socket, connecting terminal, protective switch, bag for connection diagram) Dimensions 600 mm high x 400 mm wide x 210 mm deep	<b>8357.CAS3</b>
	Cabinet UMB for other poles (incl. mounting rails, wiring channel, plug socket, connecting terminal, protective switch, bag for connection diagram) Dimensions 600 mm high x 400 mm wide x 210 mm deep	<b>8160.CAS4</b>
	Lockable tilt device	<b>8357.450V</b>
	4 fixed anchor dowel pins	<b>8357.450D</b>
	Switch for door contact	<b>8160.UDC</b>
	Fault current protective switch	<b>8160.UFI</b>
	Arresting cable	<b>8357.450UAC</b>
	Traverse for R2S-UMB, WSxxx-UMB	<b>8367.TRAV1</b>
Cables between sensors and weather case are "non-visible"		





Systems

# Perfectly Maintained



# Lufft UMB-Modules

## Common features of all UMB modules

- Galvanic isolation between sensor supply and communication
- Host communication via RS232 (PC / GPRS-modem), RS485 (EAK)
- Small housing with top hat rail mounting and bus-connection
- Firmware update via RS232
- Common power supply (24V) for UMB modules and (heated) sensors
- Online data-transfer (no memory)
- Network with up to 32 modules

## ISOCON-UMB communication module for all UMB sensors

- Communication-watchdog for reliable sensor function (reset)
- Overvoltage protection for all interfaces
- LED indication for operation mode

## ANACON-UMB 2-channel universal transmitter

2 analog inputs, 24 bit resolution for voltage, current and resistance LED indication for operation mode for following Lufft-sensors:

- Temperature / humidity sensor
- Combined wind / air pressure sensor
- Ultrasonic wind sensor 4 ... 20 mA
- Precipitation gauge (tipping bucket)

Other inputs:  
Digital signals (e.g. door contact)

## IRS21CON-UMB communication module for Lufft road sensor IRS21

- Converts the IRS21 protocol into UMB protocol
- Controls the galvanic isolated power supply for IRS21
- Overvoltage protection for all interfaces
- LED indication for operation mode

Compact design  
Easy commissioning  
RS232 or RS485 data transfer  
Easy software updates  
Free configuration software

Lufft UMB-Modules			Order No.
<b>ISOCON-UMB</b>			<b>8160.UISO</b>
<b>ANACON-UMB</b>			<b>8160.UANA</b>
<b>IRS21CON-UMB</b>			<b>8410.UISO</b>
<b>Operating conditions</b>	Power supply	12 ... 26VDC	
	Power consumption	< 100 mA	
	Ambient temperature	-30 °C ... 60 °C	
	Relative humidity	< 95 % RH	
	Protection	IP20	
	Module width	23 mm	
	RS232 Plug	DSUB9	
<b>Storage conditions</b>	Ambient temperature	-40 °C ... 70 °C	
	Relative humidity	< 95 % RH	
<b>Accessories</b>	Power supply 24V/4A		<b>8366.USV1</b>
	GPRS/GSM modem with camera connection		<b>8160.MOD-VIOLA</b>
	Night vision camera, 3 Mega pixel		<b>9983.10</b>
	Night vision camera, VGA		<b>9983.20</b>



# Lufft DACON8-UMB = 8 Channel Digital-Analog Converter for all Lufft UMB Sensors

The Lufft-DACON8-UMB (Digital-Analog-Converter) converts up to 8 channels into analog output signals. The converter can be used with one or a combination of different UMB sensors.

The Lufft-DACON8-UMB uses the UMB protocol of the sensors to read the data and converts the digital data into voltage or current output.

In case of having only one Lufft UMB sensor, the combination of the sensor and DACON8-UMB works without any other interface inbetween.

If the Lufft DACON8-UMB has to convert data of more than one Lufft UMB sensor, then every UMB sensor needs a Lufft ISOCON between the sensor itself and the DACON8-UMB, and must be connected to the RS485-bus.


In case there are more than 8 channels requested by the application, the DACON8-UMB application can work with more than one converter. It is necessary to use one converter per DACON8-UMB.

Lufft DACON8-UMB (Digital/Analog converter)			Order No.
<b>DACON8-UMB</b>			<b>8160.UDAC</b>
<b>Technical data</b>	Current	0 or 4-20 mA	
	Voltage	0 or 2-10 V	
	Accuracy	+/- 0.5% over the whole range	
	Maximum load	500 Ω	
	Resolution	16 bits	
	UMB Channels	adjustable	
	Max channels	8	
	Update rate	1-10 seconds	
	Only one DACON8-UMB per bus		

## Example 1: One DACON8-UMB / one UMB-sensor. recommended: overvoltage protection 8379.USP





## Example 2: One DACON8-UMB / three UMB-sensors and 3 ISOCONS. recommended: overvoltage protection 8379.USP

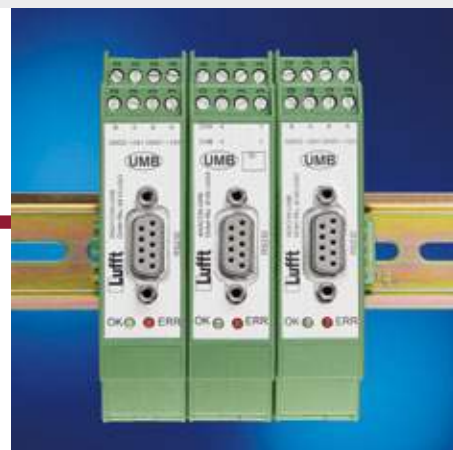

- Compact design
- Easy commissioning
- Easy software updates
- Free configuration software

# UMB Configuration Examples

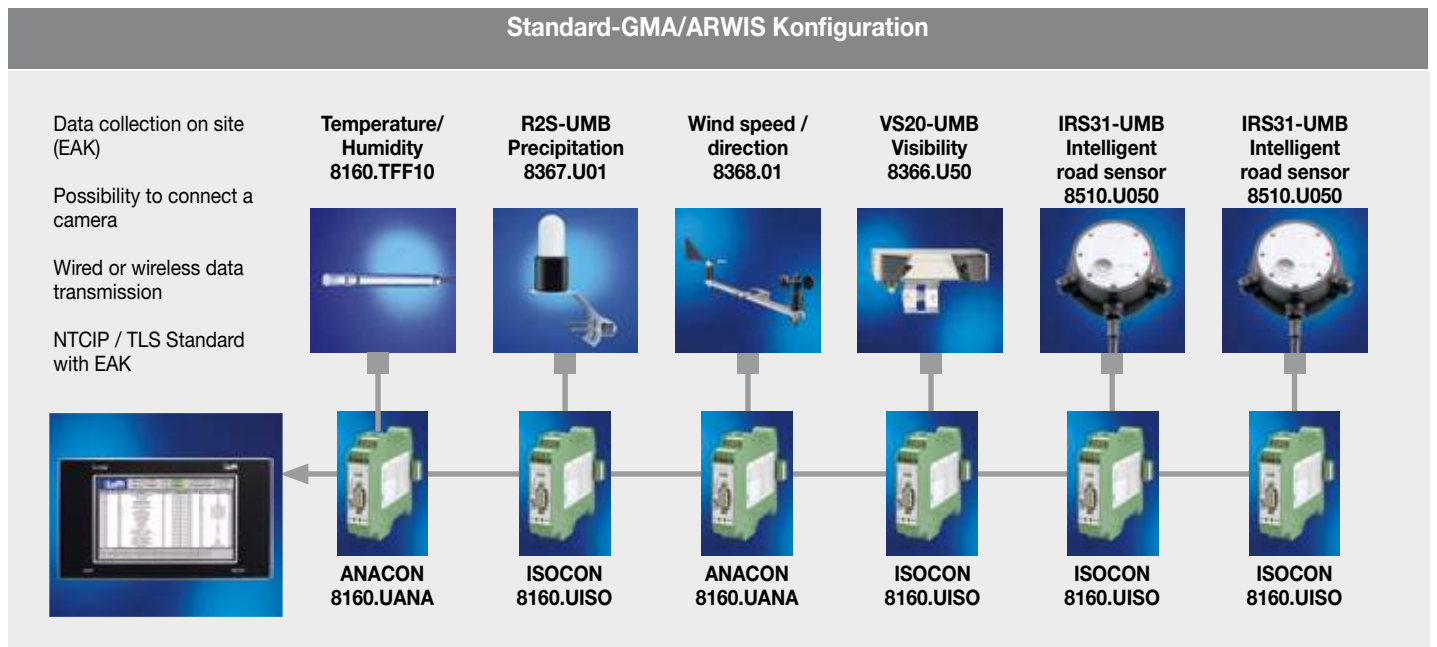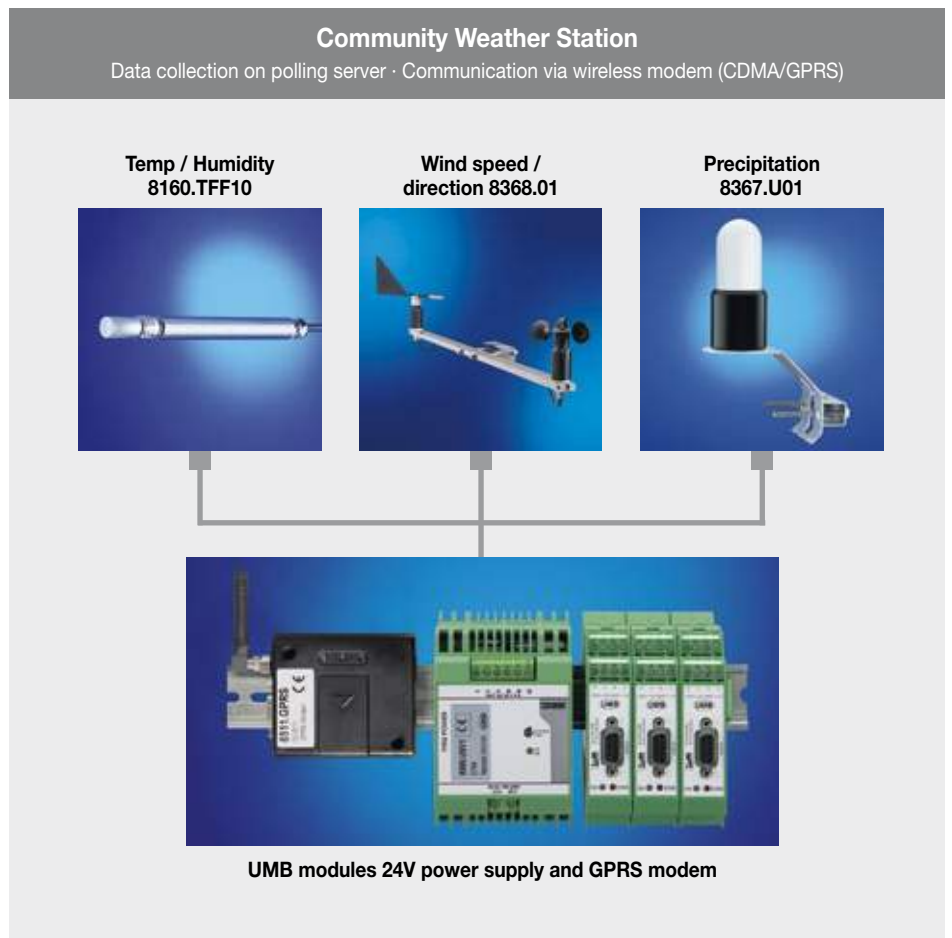





# Lufft UMB Configuration Software

A Lufft intelligent weather sensor gives you a choice of various settings. The config tool allows you to choose the correct ones, such as:

Choosing the data channels needed for your purpose. As well as raw data, these could include calculated values such as the dew point. The data can be shown in either metric or US customary units.

Recording the data in a text document during test runs. This form of protocol and archiving with date stamp can also be useful for field testing

Loading the most recent firmware in the intelligent probe. Continual improvements and function enhancements can therefore simply be installed during maintenance. Should you prefer not to alter the setting yourself, a local Lufft Partner is available to aid in the correct configuration of your intelligent measuring device.

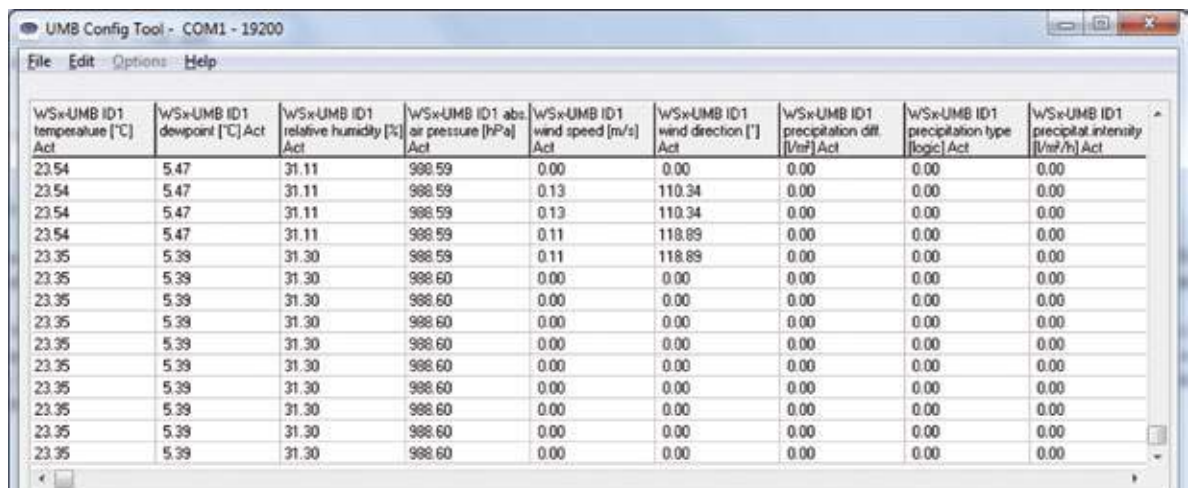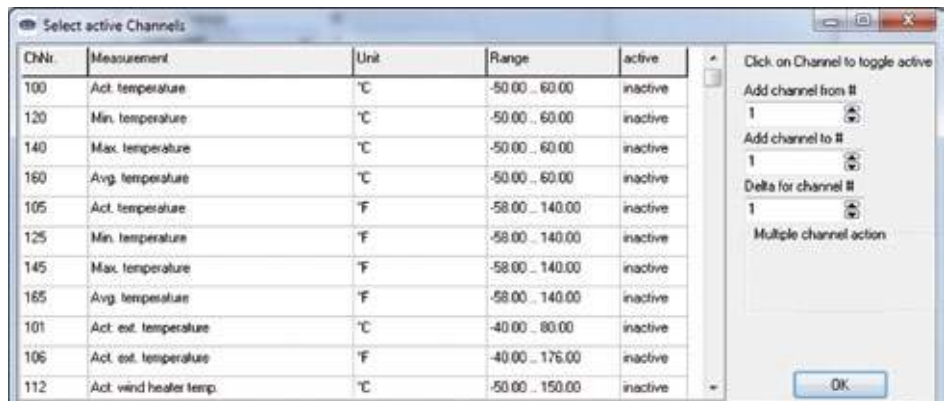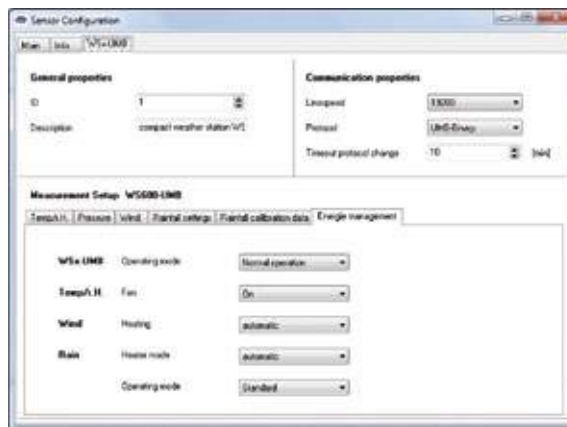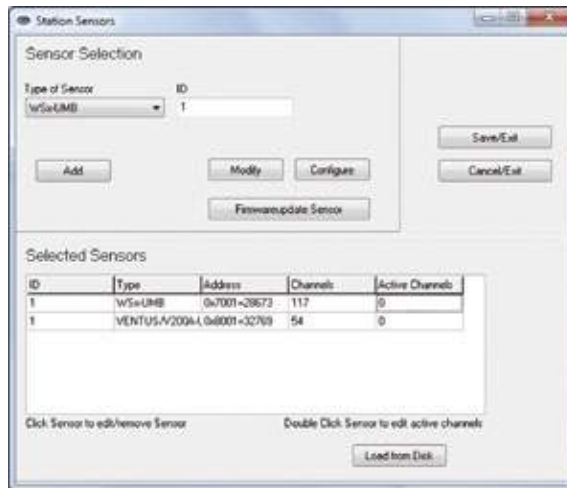



# Good to Know



**Road surface temperature:** The sensor measures the "sun temperature" 2 mm below the surface. The most important temperature measurement for ice warning systems.

**Road depth temperature - Depth 1:** The sensor measures at a depth of, for example, 5 cm below the road surface. Typically the road surface temperature graph follows a similar path with a time delay.

**Road depth temperature - Depth 2:** The sensor measures at a depth of, for example, 30 cm below the road surface. Compared to the road surface temperature the measurement changes very slowly. After a long cold phase the measurement is often below 0 °C, critical road conditions can arise even when the weather changes from "dry/cold" to "warm/humid" and the air temperature is above typical freezing temperature.

**Freezing temperature:** The IRS-sensor measures the proportion of salt in the water and calculates the freezing temperature. This is the value at which the soluble liquid on the surface freezes (icing).

**Water film:** The sensor measures the water film height in micrometers. Aquaplaning usually occurs between measurements from 0.7 to 700 micrometers. The higher the water film, the higher the concentration the de-icer must be to prevent freezing. The freezing point is dependent on the concentration of the de-icer and the actual water film height.

**Salt concentration:** The sensor measures the proportion of salt in the water and cal-



culates the freezing temperature. The salt concentration is equivalent to the freezing temperature.

**Road condition:** The sensor measures whether the road surface is dry, damp or wet. Dryness, dampness or wetness is determined in accordance with the measured water film height (see above). The sensor also determines critical road conditions (slippery).

**Precipitation intensity:** The sensor measures and recalculates the precipitation intensity every minute. Typically, this is output as "amount per hour", e.g. 6.8 mm/h = 6.8 [l/m<sup>2</sup>]/h. The sensor has a very fast response time: the intensity is generally recalculated every 10 minutes.

**Precipitation type:** The sensor differentiates between the following typical types of precipitation (also described as "present weather"):

- Drizzle
- Rain
- Sleet
- Hail
- Snow



**Air temperature:** The sensor generally measures the air temperature in an air permeable housing, which protects the sensor against direct radiation and humidity, at a height of 4 m above the road (on the mast). In the event of solar irradiation, the air temperature measurement varies considerably from the road surface temperature.

**Dew point:** Dew point is the calculated temperature at which the ambient air is unable to absorb any further moisture, i.e. the air releases water in liquid form (mist formation). A road surface temperature below the dew point leads to the formation of frost (at road surface temperature < 0 °C).

**Relative humidity:** The sensor measures the humidity in the radiation-protected housing generally at a height of 4 m above the road (on the mast). The dew point is calculated on the basis of the relative humidity and air temperature.



Evaluate, React, and  
**Decide**



# Software Collector / SmartView3

## Functions:

Web based visualization and data collection software for Lufft dataloggers/transmitters

Storage of data in database

Flexible export and import functions for integration of external/third party software/data (CSV and XML)

Simultaneous data collection via unlimited communication modules (e.g.modems)

Integration of webcam pictures (via TCP / IP-FTP)

Basis version Collector  
(Collector for up to 5 stations)  
**Order No.: 8160.COLLECT05**


Unlimited version Collector  
(unlimited quantity of stations)  
**Order No.: 8160.COLLECT**

SmartView3 incl. Collector  
up to 5 stations  
**Order No.: 8040.SV05**

SmartView3 incl. Collector  
unlimited  
(Web visualization)  
**Order No.: 8040.SV300**

## New functions:

- Extremely flexible alarm (SMS, email, voicemail)
- 6hr. forecast module

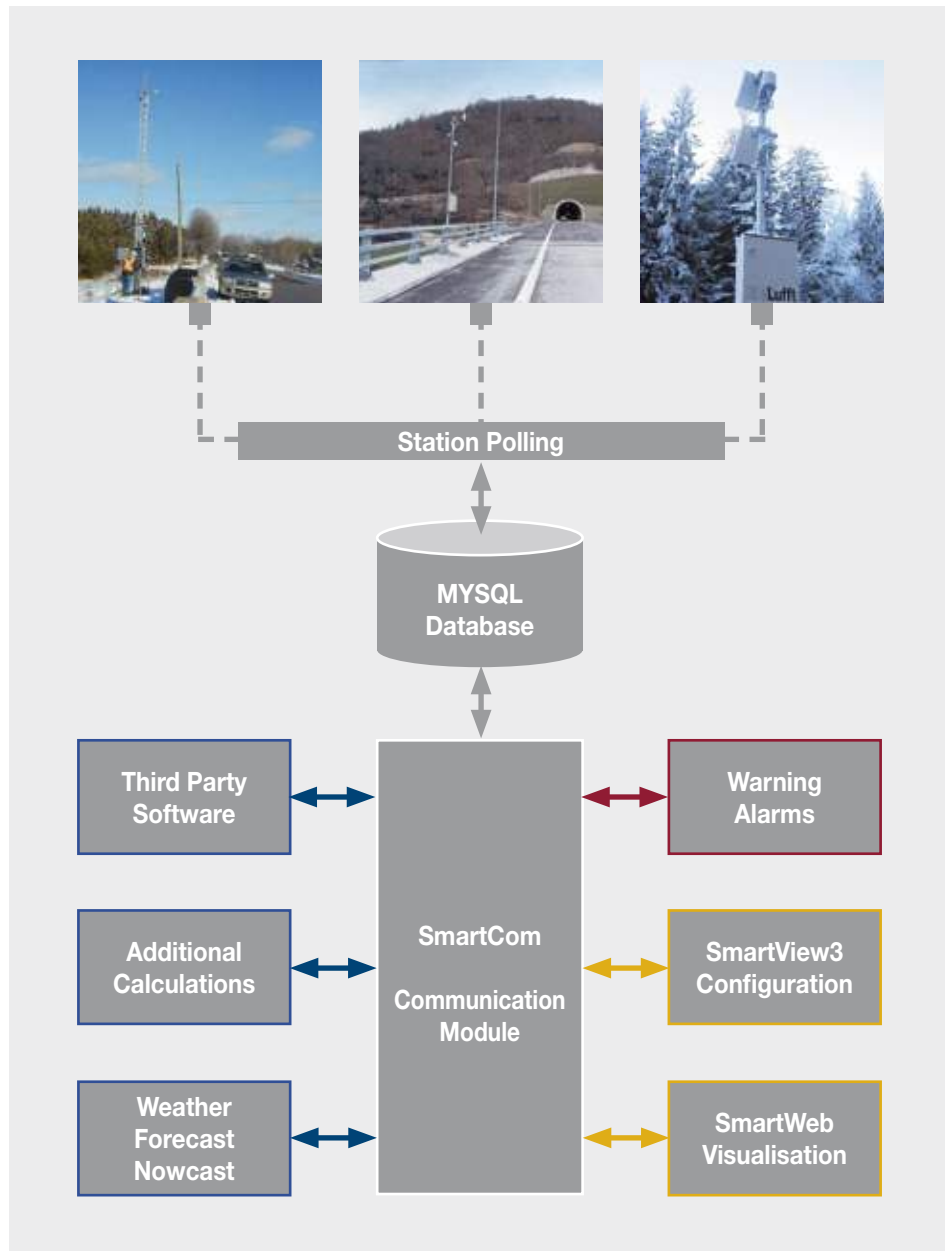

A screenshot of the Lufft software configuration window. It contains various input fields and checkboxes for setting up a station. Fields include 'Name', 'Modem', 'Port', 'Baudrate', 'Datenrate', 'Modemtyp', 'Modemhersteller', 'Modemmodell', 'Modemtyp', 'Modemhersteller', 'Modemmodell', 'Modemtyp', 'Modemhersteller', 'Modemmodell'. There are also sections for 'Stationenverwaltung' and 'Stationenverwaltung'.



# Measurements

**Please note:**


- Road surface temperature below 0 degrees Celsius and below dew point causes frost.
- Liquid precipitation (rain) on frozen ground causes black ice (subsurface road temperature below 0 degrees Celsius).



Integration of a camera image into the visualization

Graphical displays (day and week charts)

Measurement data in tabular form

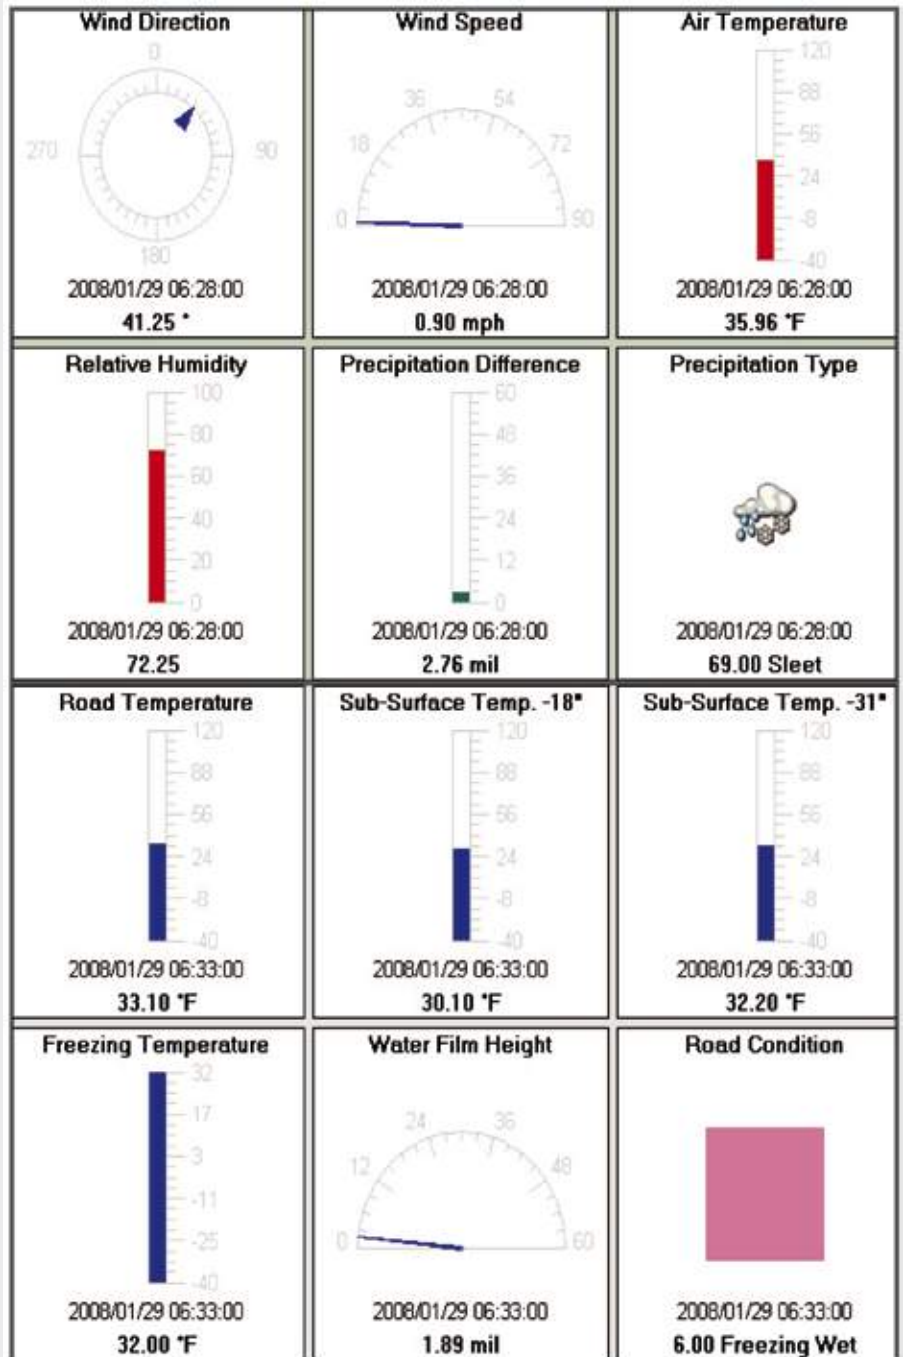

# SmartView3 Functions Overview

Functions Overview of SmartView3 1.8.2 (as of 2011)				
	Collector (Basic)	Collector (Unlimited)	Full (up to 5 stations)	Full (up to 300 stations)
<b>Data transfer</b>				
Quantity of weather stations	max. 5	unlimited	max. 5	unlimited
<b>Types of stations</b>				
Station type Opus200 (on-and offline)	■	■	■	■
Station type Opus2 (on-and offline)	■	■	■	■
Station type UMB (online)	■	■	■	■
Station type HP100 (offline)	■	■	■	■
Read sensor configurations	all types	all types	all types	all types
Change sample and storage rate and memory mode (Min/Max/ave)	for OPUS200	for OPUS200	for OPUS200	for OPUS200
Station type "import"	■	■	■	■
Station type "TLSoIP"	■	■	■	■
Station type "Boschung TLS"	■	■	■	■
Station type „MSSI“	■	■	■	■
Station type „NTCIP“	■	■	■	■
Transfer camera picture via FTP	■	■	■	■
Transfer camera picture via HTTP	■	■	■	■
Transfer camera picture via MSSI	■	■	■	■
Transfer camera picture via NTCIP	■	■	■	■
<b>Connections</b>				
Direct (RS232)	■	■	■	■
TCP/IP (Station with COM Server or CDMA/GPRS Modem with fixed IP address or DynDNS support)	■	■	■	■
Modem (TAPI)	■	■	■	■
PPP (camera picture only)	■	■	■	■
PPP (for NTCIP )	■	■	■	■
<b>Intervals</b>				
Fixed (e. g. every 20 minutes)	■	■	■	■
No transfer at special night periods (e. g. not between 10.00 p. m. and 5.00 a. m.)	■	■	■	■
Special times	■	■	■	■
<b>Modem poll</b>				
Max quantity of modems	unlimited	unlimited	unlimited	unlimited
"Modem Pools" (poll stations with dedicated modems)	■	■	■	■
<b>Recalculation of values</b>				
Re-scale data before storing in the database	■	■	■	■
Mapping of data before storing in the database (e. g. change of road conditions codes)	■	■	■	■
<b>Clock synchronization</b>				
Synchronization of device clock (datalogger) through PC clock device clock can be UTC or local time (with or without summertime adjustment)	■	■	■	■
<b>Calculation channel</b>				
Calculation of sensor data as "calculation channel" according to delivered raw data. Immediately: scale of raw data for a configurable coefficient, generation of sum/average/minimum value/maximum value for a specific period of time, mapping of the values	■	■	■	■
<b>Logic sensor types</b>				
Same presentation of channels of different stations such as OPUS200 and OPUS208 and UMB	■	■	■	■
Hide/delete measured values of channels dependent upon another channel (e.g. hide freezing point if no residual salt is detected)	■	■	■	■

# SmartView3 Functions Overview

Functions Overview of SmartView3 1.8.2 (as of 2011)				
	Collector (Basic)	Collector (Unlimited)	Full (up to 5 stations)	Full (up to 300 stations)
<b>Backup/archive of data</b>				
Time-controlled automatic backup of full database	■	■	■	■
Time-controlled deletion of old data in database (including backup of data before deletion starts)	■	■	■	■
Time-controlled compression of data in the database including backup before compression starts (reduction of data down to one value per hour/day)	■	■	■	■
Time-controlled deletion of "old" camera pictures in the database (including backup of data before deletion starts)	■	■	■	■
Restore of backup-data - including deletion of compressed data before restoring process starts (if the backup is the result of a data compression)	■	■	■	■
Automatic transfer of backup-file onto a server via FTP	■	■	■	■
<b>User access administration</b>				
Administration of users / functions and user groups	■	■	■	■
Admission to functions for users/groups	■	■	■	■
Create/delete stations	■	■	■	■
Edit/view configuration of a station	■	■	■	■
Create/delete website			■	■
Change configuration of website			■	■
Edit/view configuration of website			■	■
Create/change user	■	■	■	■
Change configuration data of software	■	■	■	■
<b>Export/Import</b>				
Manual Export/Import			■	■
Automatic Export/Import			■	■
Export of configurable values of one or more stations in one file			■	■
Export in "CSV" format incl. parameter settings			■	■
Import in "CSV" format incl. parameter settings			■	■
Export as a "Hex Dump of a TLS Telegram"			■	■
Export in "XML" format incl. parameter settings			■	■
Scale of data for export (e. g. recalculation of m/s into km/h)			■	■
Mapping of data for export (e. g. recalculation of road conditions codes)			■	■
Scale of import-data before storing the data in the database			■	■
Mapping of import-data before storing the data in the database			■	■
Configuration of export/import jobs (mainly for plan disease calculations)			■	■
Different export-import modules such as disease calculation models, dew point calculation, road forecast (24h)			■	■
<b>External software modules for Export/Import</b>				
External software module for the dew point and vaporation pressure calculation			■	■
External software for the combined road condition calculation			■	■
External software for the calculation „alarm road condition“			■	■

Functions Overview of SmartView3 1.8.2 (as of 2011)				
	Collector (Basic)	Collector (Unlimited)	Full (up to 5 stations)	Full (up to 300 stations)
<b>External modules for agricultural applications</b>				
Apple Scab ( <i>Venturia inaequalis</i> )	■	■	■	■
Onion: Downey Mildew ( <i>Peronospora destructor</i> )	■	■	■	■
Onion: Neck Rot ( <i>Bortyris squamosa</i> )	■	■	■	■
Carrot Alternariosis ( <i>Alternaria dauci</i> , <i>A. radicina</i> )	■	■	■	■
Potato: Late Blight ( <i>Phytophthora infestans</i> )	■	■	■	■
Fire Blight ( <i>Erwinia amyloflora</i> )	■	■	■	■
Strawberry: Grey mould ( <i>Botrytis cinera</i> )	■	■	■	■
Beetroot: Leaf Spot ( <i>Cercospora spp.</i> )	■	■	■	■
Grape Vine Downey Mildew ( <i>Plasmopara viticola</i> )	■	■	■	■
Grape Vine Powdery Mildew ( <i>Unicula necator</i> )	■	■	■	■
Bortyris Bunch Rot ( <i>Botrytis cinerea</i> )	■	■	■	■
Seljaninov Hydrothermal Coefficient	■	■	■	■
<b>Calculation channels</b>				
Internal calculation of sensor data as "calculation channel" according to imported raw data. Scale of raw data for a configurable coefficient, generation of sum/average/minimum value/maximum value for a specific period of time; differential calculation with previous value; mapping of the values in a configurable table			■	■
<b>Control of automatic import/export</b>				
Export if new data has been stored			■	■
Time-controlled export (e.g. every 5 minutes)			■	■
Flexible definition of time-interval for export based on start-uptime			■	■
Export and execution of a software program			■	■
Export and automatic transfer of a file via FTP			■	■
Export and execution of a software program and import of the calculated result (e.g. disease model calculation)			■	■
FTP transfer of files before import starts			■	■
Time-controlled FTP transfer of files including "Wildcard" support			■	■
Automatic deletion of files transferred via FTP after transfer has been finished			■	■
Import of files including "Wildcard" support			■	■
Automatic deletion of import files after import has been finished			■	■
<b>Visualization of data as "website"</b>				
Indication of station's status (last data transfer, transfer success) in a table			■	■
Indication of station's status (last data transmission, transfer success) on a static map			■	■
Indication of (selected) sensor data in a "pop-up" window by "scroll over" with the mouse on a station, on the static map			■	■
Indication of status-information and current values of stations on "stations-page" per station			■	■
Indication of camera-picture on "stations-page" of a station			■	■
Graphic indication of the current value on the "station page" in the form of an analog-instrument			■	■
Indication of reports (day/month/year) with sum/average and extreme values during the report period of time, on the "station page"			■	■
Automatic generation of "data pages" to indicate the data in the given time interval, day/week/month/year (diagram and table)			■	■

# SmartView3 Functions Overview

Functions Overview of SmartView3 1.8.2 (as of 2011)				
	Collector (Basic)	Collector (Unlimited)	Full (up to 5 stations)	Full (up to 300 stations)
<b>Visualization of data as "website", continued</b>				
Selectable "data pages" including current values from sensors of different stations and different storage intervals (day/week/month/year) on one page			■	■
Selectable line and status (bar) diagrams on "data-pages"; line diagrams with up to 4 different Y-axes (units). Scale of line diagrams manually or automatically-no other periods.			■	■
Indication of reports (depending on configured period for the station pages) with average/sum and extreme values on the period of time, on the station page			■	■
Management of "pages-archive" for data pages (historic measurements)			■	■
Automatic transfer of admission rights on to website/webserver (cia .htaccess – function has to be active on web-server)			■	■
Automatic erasure of archive pages prior to configured period of time			■	■
Free configuration of text elements for data pages and stations pages			■	■
Archive of pictures			■	■
Easy configuration of stations pages and data pages via templates			■	■
Overview-table with current readings of all stations			■	■
Configuration of time-offsets for stations in different time zones			■	■
<b>Group-status page(s) with sensor values and camera pictures</b>			■	■
Freely configurable diagrammes with data from the last 12/24 hours on the stations' pages			■	■
Optional hide function of "non-available" measured values (e.g. residual salt with TLS)			■	■
Several linked map layers			■	■
Separate configuration of „pop-up information“ to the stations (sensor value) from the overview table			■	■
Option of several overview tables (per map representation)			■	■
Optional automatic adjustment of map size to browser window			■	■
„Only camera“ stations (stations without sensors)			■	■
Identification of stations with cameras /only camera on the map representation with corresponding icons			■	■
Menu optionally as a „hierarchical pop-up menu“			■	■
Nested/hierarchichal grouping of stations in the pop-up menus			■	■
<b>Warnings and alarms</b>				
Configuration of high and low threshold per sensor; generation of warnings/alarms if value is out of limits			■	■
Alarm message if station cannot be polled			■	■
Alarm message if import file cannot be used			■	■
In case of alarms, generation of email message (station could not be polled, sensor delivers error, sensor delivers error value/import, sensor delivers error / import, sensor delivers alarm value) to one or more destination addresses			■	■
Warning/alarm based on a condition value (road state)			■	■
SMS messages including alarm/warning contents to one or multiple destinations			■	■
Warning/alarm in case of violating selected thresholds			■	■
Selectable time frames for SMS alarms transmissions			■	■
Configuration of minimum time intervals between alarm messages			■	■
Configuration of time to repeat alarm messages			■	■



# Standard-Certificate for all UMB-Sensors



LUFFT Mess- und Regeltechnik GmbH

Seite/Page: 1/2

Herstellerprüfzertifikat M nach DIN 55350-18-4.2.2  
 Manufacturer test certificate M according to DIN 55350-18-4.2.2

Gegenstand Object	IRS31-UMB		
Sensornummer Sensor number		Seriennummer Serial number	
Hersteller Manufacturer	G. Lufft Mess- und Regeltechnik GmbH Gutenbergstraße 20 70736 Fellbach, Germany		

**Temperaturmessung / Temperature measurement**

Prüfpunkt Test point	Prüfbedingung Test conditions	Bestanden Passed	
		Ja Yes	Nein No
Fahrbahnoberflächentemperatur Road surface temperature	Temperatur = 0,0°C ±0,1°C Temperature = 0,0°C ±0,1°C	X	
Tiefentemperatur 1 Temperature under ground 1	Temperatur = 0,0°C ±0,1°C Temperature = 0,0°C ±0,1°C	X	
Tiefentemperatur 2 Temperature under ground 2	Temperatur = 0,0°C ±0,1°C Temperature = 0,0°C ±0,1°C	X	

**Temperatursensor / Temperature sensor**

Prüfpunkt Test point	Prüfbedingung Test conditions	Bestanden Passed	
		Ja Yes	Nein No
Fahrbahnoberflächensensor Road surface sensor	Temperatur = 0,0°C ±0,1°C Temperature = 0,0°C ±0,1°C		
Tiefentemperatursensor 1 Temperature sensor under ground 1	Temperatur = 0,0°C ±0,1°C Temperature = 0,0°C ±0,1°C		
Tiefentemperatursensor 2 Temperature sensor under ground 2	Temperatur = 0,0°C ±0,1°C Temperature = 0,0°C ±0,1°C		

Dieses Prüfzertifikat darf nur vollständig und unverändert weiterverbreitet werden. Auszüge oder Änderungen bedürfen der Genehmigung des Ausstellers. Prüfzertifikate ohne Unterschrift und Stempel haben keine Gültigkeit.  
 This test certificate may not be reproduced other than in full except with the permission of the exhibitor. Test certificates without signature and seal are not valid.

Stempel Seal      Datum Date      Qualitätssicherung Quality control      Bearbeiter Person in charge

F. V. Rolf Großmann

LUFFT Mess- und Regeltechnik GmbH




Seite/Page: 2/2

Herstellerprüfzertifikat M nach DIN 55350-18-4.2.2  
 Manufacturer test certificate M according to DIN 55350-18-4.2.2  
 Seriennummer / Serial number:

**Kalibrierung Gefriertemperatur / Calibration freezing point**

Wasserfilmhöhe water film height	Gefriertemperatur freezing point	Sollwert reference value	Messwert reading
H <sub>2</sub> O + NaCl 11,8 %, 1000 µm	-8,9 °C ± 1 °C	11,8 % ± 1,0 %	%
H <sub>2</sub> O + NaCl 2,0 %, 500 µm	-1,0 °C ± 1 °C	2,0 % ± 1,0 %	%
H <sub>2</sub> O + NaCl 1,1 %, 250 µm	-0,6 °C ± 1 °C	1,1 % ± 1,0 %	%

**Kalibrierung Wasserfilmhöhe / Calibration water film height**

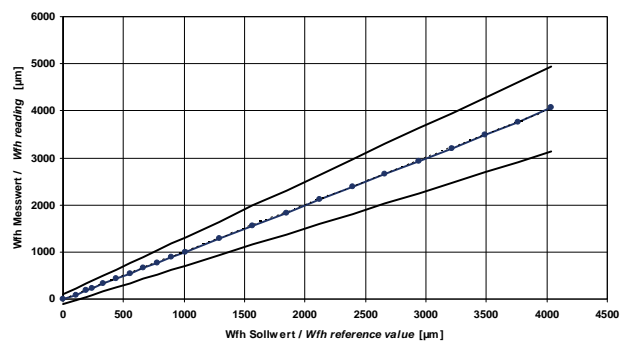

**Funktionstest / Function test**

Prüfpunkt Test point	Prüfbedingung Test conditions	Bestanden Passed	
		Ja Yes	Nein No
Temperaturzyklus von -30°C...+70°C Temperature cycle from -30°C...+70°C	Alle Messwerte korrekt All measured values correctly	X	

# Intelligent Sensor Applications Worldwide





**G. LUFFT**  
**Mess- und Regeltechnik GmbH**

**Germany:**

Gutenbergstraße 20  
70736 Fellbach  
P.O. Box 4252  
70719 Fellbach  
Tel: +49 (0)711 -51 822 -0  
Fax: +49 (0)711 -51 822 -41  
E-mail: info@lufft.de  
www.lufft.de

**North America:**

**Lufft USA, Inc.**  
820 E Mason St #A  
Santa Barbara, CA 93103  
Tel.: +01 919 556 0818  
Fax: +01 805 845 4275  
E-Mail: sales@lufftusainc.com  
www.lufft.com

**China:**

**Shanghai Office:**

Lufft (Shanghai)  
Measurement & Control  
Technology Co., Ltd.  
Room 507 & 509, Building No.3,  
Shanghai Yinshi Science and  
Business Park,  
No. 2568 Gudai Road,  
Minhang District,  
201199 Shanghai, CHINA  
Tel: +86 21 5437 0890  
Fax: +86 21 5437 0910  
E-Mail: china@lufft.com  
www.lufft.cn

**Beijing Office:**

B501 Jiatai International Mansion  
No. 41 East 4th Ring Road,  
Chaoyang District,  
100025 Beijing, CHINA  
Tel: +86 10 65202779  
Fax: +86 10 65202789  
E-Mail: china@lufft.com  
www.lufft.cn

*a passion for precision · passion pour la précision · pasión por la precisión*



Subject to technical modifications - Traffic 06\_2014

