


Válvula de retención a disco, extremos roscados. *Single disk check valve, threaded ends.*

Características

1. Válvula de retención a disco.
2. Extremos roscados según DIN2999.
3. Construcción en Acero Inox. AISI 316 (CF8M).
4. Disco en Acero Inox. AISI 316 (CF8M).
5. Resorte en Acero Inox. AISI 316.
6. Dimensiones reducidas.
7. Cierre metal – metal.
8. Presión de trabajo máxima 63 bar.
9. Temperatura de trabajo -20°C +240°C.

Features

1. Single disk check valve.
2. Threaded ends according to DIN2999 Std.
3. Made of Stainless Steel AISI 316 (CF8M).
4. Disk made of AISI 316 (CF8M).
5. Spring made of AISI 316.
6. Small dimensions.
7. Seat metal to metal.
8. Max. Working pressure 63 bar.
9. Working Temperature -20°C +240°C.

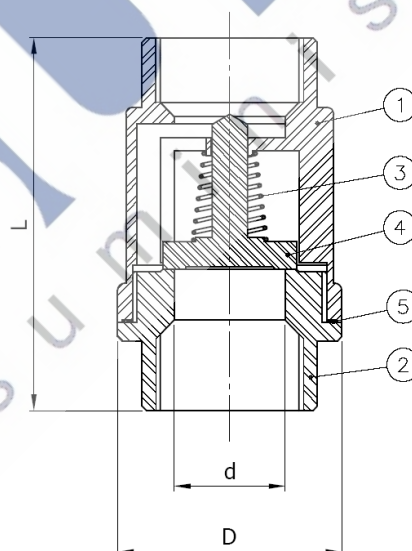

Nº	Denominación / Name	Material	Acabado Superficial / Surface Treatment
1	Cuerpo / Body	CF8M (SS 316)	Decapado / Shot Blasting + Pickling
2	Tapa / Cap	CF8M (SS 316)	Decapado / Shot Blasting + Pickling
3	Muelle / Spring	AISI 316	-----
4	Disco / Disk	CF8M (SS 316)	Decapado / Shot Blasting + Pickling
5	Junta / Gasket	PTFE	-----

DIMENSIONES GENERALES / GENERAL DIMENSIONS:

Medida/Size	DN	PN	Dimensiones/Dimensions (mm)			Opening Pressure ↑ (mbar)	Peso/Weight (Kg)
			d	D	L		
1/4"	8	63	8	30,5	53	80~90	0,170
3/8"	10	63	10	30,5	53	60~70	0,160
1/2"	15	63	15	37	56	55~65	0,210
3/4"	20	63	20	42	63	50~60	0,290
1"	25	63	25	48	74	45~50	0,410
1 1/4"	32	63	30	58	81	35~40	0,660
1 1/2"	40	63	38	70	91	25~30	0,990
2 "	50	63	47	82	97	25~30	1,420
2 1/2"	65	63	61	102,5	118	25~30	2,440
3"	80	63	75	120	138	20~25	3,800
4"	100	63	94	150	158	20~25	6,600

CURVA PRESIÓN TEMPERATURA / PRESSURE TEMPERATURE RATING

