

FIBERGLASS BLIND BOW HANGER INSTALLATION INSTRUCTIONS

STEP 1: Position the Bow Hanger in the desired location.

NOTE: Make sure you check for clearance of your Bow Hanger and windows. (Bow Hanger is ussualy positioned in space above vertical bow window in fiberglass blinds)

STEP 2: Hold the base bracket in the desired position and mark the hole locations.

STEP 3: Using a 1/4" diameter drill bit, drill (4) holes through the side of the blind.

STEP 4: From the outside of the blind, install a hex bolt through the hole in the blind. Then place the Brase Bracket of the Bow Holder over the hex bolt and secure using a wing nut, as illustrated in Figure 11.1

NOTE: Opening the side windows and reaching through the opening will allow access to the outside of the blind.

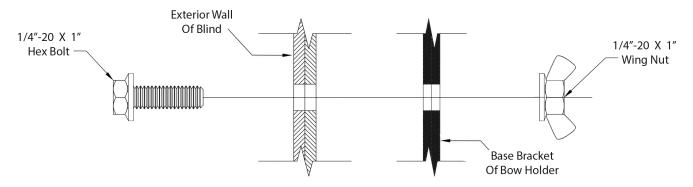


Figure 11.1

STEP 5: After all (4) hex bolts have been installed, tighten securely with wrench.

You can now adjust Bow Holder for your bow & desired location and begin using.

Parts Included:

- (1) Bow Holder with Base Bracket
- (1) Hardware Kit

Hardware Included:

- (4) 1/4"-20 X 1" Hex Bolt
- (4) Wing Nut
- (2) "U" Bolts (Not used in Fiberglass Blind)

Tools Required (Not Included):

Drill

Drill Bit - 1/4" Diameter (2) 7/16" Wrenches



FIBERGLASS BLIND INSTALLATION

Should you have any questions about the assembly, installation or use of this product, or any other Redneck Outdoor product, please call one of our customer service representatives toll free at 877-523-9986.

Made in China RD-BHA-MANUAL-11/27/18



BALE BLIND & SOFT SIDE BLIND BOW HANGER INSTALLATION INSTRUCTIONS

STEP 1: Position the Bow Hanger in the desired location.

NOTE: Make sure you check for clearance of your Bow Hanger and windows. (Bow Hanger needs to be installed on a vertical brace of the frame)

STEP 2: Hold the base bracket in the desired position

STEP 3: Using the supplied "U" Bolts & Wing Nuts, fasten the Bow Hanger to the vertical brace of the frame, as illustrated in the picture below.

STEP 4: Tighten securely with wrench.

You can now adjust Bow Holder for your bow & desired location and begin using.



BALE BLIND & SOFT SIDE BLIND INSTALLATION

Parts Included:

Tools Required (Not Included): (1) 7/16" Wrenches

- (1) Bow Holder with Base Bracket
- (1) Hardware Kit

Hardware Included:

- (4) 1/4"-20 X 1" Hex Bolt
- (4) Wing Nut
- (2) "U" Bolts (Not used in Fiberglass Blind)

Should you have any questions about the assembly, installation or use of this product, or any other Redneck Outdoor product, please call one of our customer service representatives toll free at 877-523-9986.

> Made in China RD-BHA-MANUAL-11/27/18