



C-Pak
AUR1
CPR16/230
16A
16000
Test
I-ON
Jan 30mm
UL 250V
EC 61008
EN 61008

C-Pak
DZ47-850 C16
16A
16000
VNT C16

OBLIQUE

An affordable modular power & data system, perfect for an expanding business with it's 3PP interconnective capabilities.



DESKTOPPOWER.CO.UK

OBLIQUE

The Oblique range is an electrical power system which is available in two, three and four way outlet options.

The Oblique range is made from a high grade plastic material.

Each version can be supplied with a variety of switch options as well as fuse options.



MCB Housing



- 189-1033** 10A MCB, GST male / GST female
- 189-2033** 16A MCB, GST male / GST female
- 189-3033** 10A MCB, 20mm / GST female
- 189-4033** 16A MCB, 20mm / GST female

RCBO Housing



- 185-1033** 10A MCB, GST male / GST female
- 185-2033** 16A MCB, GST male / GST female
- 185-3033** 10A MCB, 20mm / GST female
- 185-4033** 16A MCB, 20mm / GST female

2 Port Voice Data Housing



- 102-0052** Cat5e, 2m
- 102-0053** Cat5e, 3m
- 102-0055** Cat5e, 5m
- 102-0062** Cat6, 2m
- 102-0063** Cat6, 3m
- 102-0065** Cat6, 5m

4 Port Voice Data Housing



- 104-0052** Cat5e, 2m
- 104-0053** Cat5e, 3m
- 104-0055** Cat5e, 5m
- 104-0062** Cat6, 2m
- 104-0063** Cat6, 3m
- 104-0065** Cat6, 5m

199-5000 Oblique Face Mounting Plate VDH



120-1010 2 x UK individually fused



199-2000 Oblique Face Mounting Plate 2 Way



120-2010 2 x UK individually fused I with switch



130-1010 2 x UK individually fused



199-3000 Panel Mount for 3 Way



130-2010 3 x UK individually fused I with switch



140-1010 4 x UK individually fused




140-2010 4 x UK individually fused I with switch



199-4000 Oblique Face Mounting Plate 4 Way




POWER LOGIC are the recognised market leader throughout the world. As such we can supply all our power products with a vast range of approved international power sockets. (full details in the technical brochure).




USA




CHINA/AUSTRALIA




FRANCE/BELGIUM




SCHUKO




INDIA



SWITZERLAND




ITALY




UK 'T'


We stock a vast range of Data and AV interfaces that can be fitted within the Oblique range (full details in the technical brochure). We also stock the associated cables in lengths from 1 to 10 metres.




AUDIO



RCA




USB



DATA



HDMI



VGA

BUILT-IN PROTECTION

The unit adheres to international safety rules and regulations with its optional double insulation design

PROTECTION



The unit can be fitted with fuses, Power Filters, Circuit Breakers and earth leakage devices

MOUNTING OPTIONS

Oblique is usually a stand-alone unit that can be screwed to any surface through mounting holes. Desk clamps are available

SWITCHES

The unit is able to house a 15A Thermal Overload Switch as well as other standard red and green switches

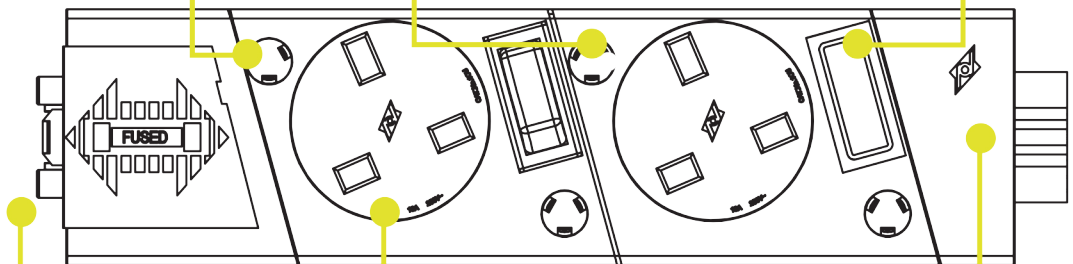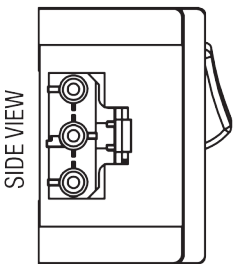

UNIT OPTIONS

The Oblique is a molded unit that is available as a 2-way (as illustrated here), 3-way or 4-way power outlet system that can interlock making even larger configurations.

INTERCONNECTING

Obliques are fitted with detachable cable(s) which connect to the unit with a 3PP connector allowing the unit to be chain linked making it perfect for office use.

POWER OUTLET ORIENTATION

All power outlets are permitted in 15° increments

POWER OPTIONS

The unit has Hybrid Power capabilities (power and data) and is also able to house one or more circuits in a single unit

ELECTRICAL

Operating Voltage: 220V-250V @ 50 Hz, 110V-125V AC @ 60 Hz
 Current: 15A (20A – upgraded wiring), Max Power:
 1800W @ 110V-125V AC, 3000W @ 220V - 250V AC

DIMENSIONS

Width: 55mm (approx. 2¹/₅")
 Length: 2-Way: 204mm (approx. 8"), 3-Way: 273mm (approx. 10³/₄")
 4-Way: 342 mm (approx. 13¹/₂") Total
 Height: 36.5mm (approx. 2²/₅")

