

OWNER'S MANUAL



Model EA200SW

*Hardwired
Outdoor Stereo Speakers*

TABLE OF CONTENTS

Design Features.....	1
Introduction.....	2
Install Location.....	2
Cautions.....	2
Inspection.....	2
Contents.....	3
Unpacking.....	3
Assembly/Installation.....	5
Audio Connections.....	9
Maintenance.....	10
Warranty.....	11
Specifications.....	Inside Back Cover

WARNING! Plastic bags are used in the packaging of your speakers. To avoid danger of suffocation, please keep these bags away from babies and children.

Small parts are also contained with your speakers to complete assembly and may present a choking hazard for babies and small children as well.

Integrated handles are designed for lifting when cabinet is in the upright position only!



Correct



Wrong

Specifications

Drivers per Speaker:	
Tweeter	1 - 1" Titanium dome / ferrofluid cooled
Woofer - upper	1 - 6.5" Polypropylene cone with rubber surround
Woofer - lower	2 - 6.5" Polypropylene cone with rubber surround mounted in compound/isobaric configuration
Electrical:	
Frequency Response	Overall 35Hz - 20kHz / lower -3db limit 45Hz
Crossover	12db/oct at 3500Hz Air core inductors and polypropylene capacitors
Nominal Impedance	8 ohms
Power Handling	100 watts rms / 150 watts peak
SPL	86db 1W/1m
Inputs	Gold-plated / accepts banana connectors or wire (8ga. max)
Dimensions:	
Cabinet Size (as installed)	35-7/8" H x 8-7/8" W x 9-1/4" D
Footprint Size	12" W x 9-1/4" D
Cabinet Weight	Upper ~36lbs. ea. / Lower ~40lbs. ea.

Model EA200SW



damage in transit. If original shipping containers are not available, the appropriate packaging can be ordered by calling us.

This Warranty is not transferable and does not cover product purchased, serviced or used outside the United States. The Warranty does not extend to the elimination of externally generated static or noise, or to costs incurred for the installation, removal or reinstallation of the product.

This Warranty does not apply to any product or part thereof which, in the opinion of the Company, has suffered or been damaged through alteration, improper installation, mishandling, misuse, neglect, accident, disaster, improper maintenance, failure to follow instructions, excess voltage or current caused by lightning, power line fluctuations, or by faulty 12vac power supply transformer, or any repairs not specifically authorized by the Company.

THE EXTENT OF THE COMPANY'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT PROVIDED ABOVE AND, IN NO EVENT, SHALL THE COMPANY'S LIABILITY EXCEED THE PURCHASE PRICE PAID BY PURCHASER FOR THE PRODUCT.

This Warranty is in lieu of all other express warranties or liabilities. ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, SHALL BE LIMITED TO DURATION OF THIS WARRANTY. IN NO CASE, SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES WHATSOEVER. No person or representative is authorized to assume for the Company any liability other than expressed herein in connection with the sale of this product.


This warranty gives you specific legal rights, and you may have other rights which vary from state to state. Some states do not allow the exclusion or limitations of consequential damages, so the above limitations may not apply to you. Interpretation and enforcement of this terms and conditions shall be governed by the laws of the State of Texas.




Model EA200SW

Design Features

Front View

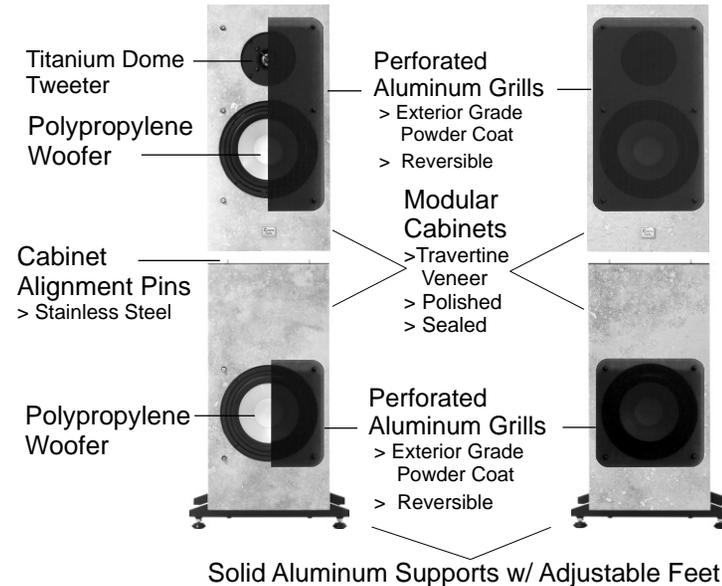

Rear View

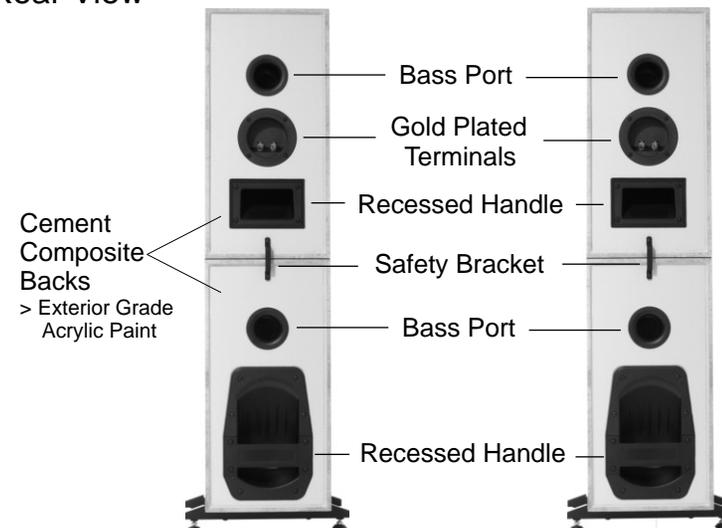

Introduction

Congratulations, and thank you, for your purchase of our EA200SW outdoor speaker system! We are confident you will agree our unique one of a kind stone veneer cabinets add a touch of indoor elegance and styling to your outdoor living space that you will appreciate for many years to come. EA200SW speakers incorporate dual woofer drivers mounted in a compound/isobaric configuration in each lower cabinet, which provides improved bass response. Please read this manual thoroughly before attempting assembly and installation.

Install Location

Our speaker systems are designed and tested to withstand the rigors of open air installation. However, an install location with some shielding from sun, direct moisture exposure, and placement in front of a wall is the ideal location from the standpoint of minimizing maintenance, extending the “like new” appearance, and improving bass performance. Separation of the speakers should be roughly six feet apart, if possible.

As with all our speakers, EA200SW’s will look and sound great if you choose to use them indoors as well.

Cautions

Our outdoor speaker systems are fully weatherproof and water resistant, when installed in accordance with this Owner’s Manual. Our speaker systems are not waterproof, and must never be submerged.

Inspection

Inspect all boxes and contents for any signs of hidden or concealed damage. If any damaged is discovered, contact us immediately, if possible, and within no more than five business days after receipt.

NOTE! Water should never be streamed directly into speaker drivers for the purpose of cleaning.

1/3/5 Year Limited Warranty

Exteris Audio, LLC (the “Company”) warrants this outdoor speaker system, whether used outdoors or indoors, against defects in material and workmanship under normal use to the original retail customer for the following periods from the date of original purchase:

- 1 Year** – Dc power supplies, fans, and installed stereo components;
- 3 Years** – All tweeter, woofer, and subwoofer drivers, including electronic crossovers. Powder coat finish on speaker grills, and base supports are warranted against peeling and blistering due to adhesion loss only. Chipping and fading are not covered; and
- 5 Years** – Speaker cabinet glue joints and attached cabinet hardware, e.g. terminals, bass ports, recessed handles, etc. Stone veneer is not warranted against naturally occurring cracks, surface defects, and finish.

To obtain repair or replacement within the terms of this Warranty, customer must contact Company via phone or email to verify proof of purchase and obtain a Return Authorization Number. Company will accept no product for return without prior consent. Company at its option, will: 1) correct the product defect without charge for parts and labor; or 2) replace the defective product with one of the same or similar design without charge for parts and labor. New and/or reconditioned parts may be used for warranty repairs. Repaired or replaced parts and products are warranted for the remainder of the original warranty period. Customer must pay all return shipping and insurance costs for warranty service, and Company will pay all shipping and insurance cost for return shipping to customer in the contiguous United States.

Due to the weight of our products and risk of shipping damage if improperly packaged, all authorized product warranty returns must be shipped in the original shipping containers, along with proof of purchase, prepaid insured. Customer assumes all risk of loss or

Maintenance

Your new speaker system is made of very rugged materials and components to ensure years of trouble-free performance. However, in order to extend the “like-new” appearance and life well beyond the warranty period, proper maintenance procedures are necessary and summarized as follows:

Cabinets – Since all natural stone has some level of porosity, it is important that a high quality sealer be used periodically. We use, and recommend, a water based color enhancing penetrating stone sealer to keep the veneer finish looking its best. If our systems are exposed directly to rain, snow and ice, then treating the cabinets every 6 months is recommended. Indirect exposure, will reduce the application of fresh sealer to about every 12 months. A good test is to clean the top of a cabinet and sprinkle a few drops of water to see if they bead on the surface. If you don’t see a nice round water bead, then it’s time to reapply sealer. To remove dirt build-up, simply wipe cabinet with soft damp cloth.

Grills – Dirt/contaminate build-up from the powder coated aluminum grills should be removed as needed or every 3 months by cleaning each grill in a solution of mild non-abrasive liquid detergent and water using a soft brush, being careful not to apply too much pressure, which may scratch the finish or bend the grill. Regular cleaning is especially important in coastal areas.

Supports – Same as Grills above, but use only fresh water (no detergent), being careful not to disturb the rubber gasket installed on top side of supports, which are mounted with waterproof adhesive.

Woofers – To maximize woofer driver life, gently wiping dirt from the rubber surround with a soft damp cloth and applying a coat of Armor All® protectant will help prevent rot and extend life. It’s recommended that cleaning and treatment take place each time the speaker grills are removed for cleaning.

Tweeters – DO NOT attempt to clean.

Contents

In addition to the four cabinets, you will find the following items included that will be needed to complete assembly and install:

Description	Qty
1. 14" x 8" perforated aluminum speaker grill	02
2. 8" x 8" perforated aluminum speaker grill	02
3. 12" x 5/8" aluminum base support	04
4. Adjustable feet w/ locknut	08
5. Safety bracket	02
6. #6-32 x 5/32" stainless button head cap screw	20
7. #8-32 x 1/4" stainless button head cap screw w/ washer	04
8. #10-32 x 1" phillips head stainless machine screw	08
9. 5/64" hex wrench for #6-32 screws	01
10. 3/32" hex wrench for #8-32 screws	01
11. 1/4"x3/4" & 1/4"x1" stainless steel alignment pins	04 ea.
12. Owner's Manual	01

Unpacking

1. Move all boxes as close as possible to the final installation location.
2. If system was shipped, carefully open each outer shipping box and remove the inner box which contains the speaker cabinet and parts.
3. Referring to *Fig. 1* below, carefully remove all loose components and parts from each box as designated by the corresponding letter:

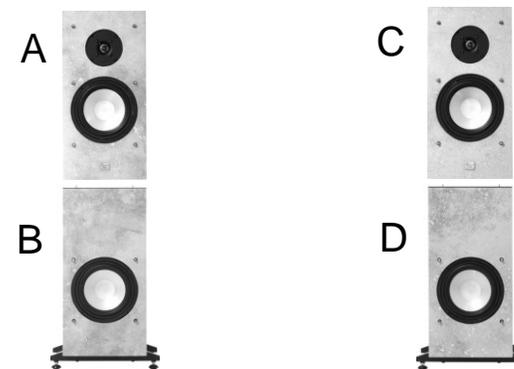


Fig. 1

A, C: Boxes for these cabinets will each contain one (1) 14" x 8" perforated aluminum grill. Remove grills and place on a flat surface.

B, D: Boxes for these cabinets will each contain one (1) 8" x 8" perforated aluminum grill and two (2) aluminum base supports. Remove for later installation.

Note: All remaining parts for assembly/install will be located in a separate small parts box.

4. Now that all loose components and parts are removed, place boxes on their side on a solid non-scratch surface, open bottom flaps of boxes, and, from the front or rear, carefully push cabinet until completely free of box. Cabinet should be resting on four (4) foam corners. Refer to *Fig. 2* below for safe removal of each speaker/cabinet.

NOTE! Cabinets are heavy, remove carefully. Seek help if needed.

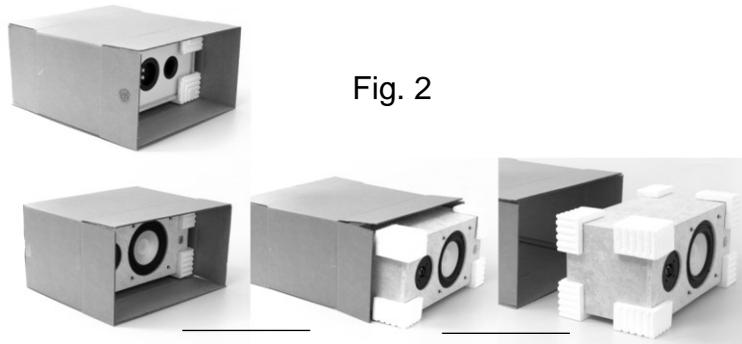


Fig. 2

5. From boxes with cabinets A,C remove the top four (4) foam corner protectors and place in the up position on a solid surface. Next, move each cabinet and place it face-up, with the back side resting on/in the foam corner pieces as shown in *Fig. 3*.



Fig. 3

Audio Connections

Model EA200SW speakers are designed to be connected to an external /indoor stereo amplifier as noted in *Fig. 9*. If speaker wires are to be run through walls, please check local building codes for appropriate wiring to use.

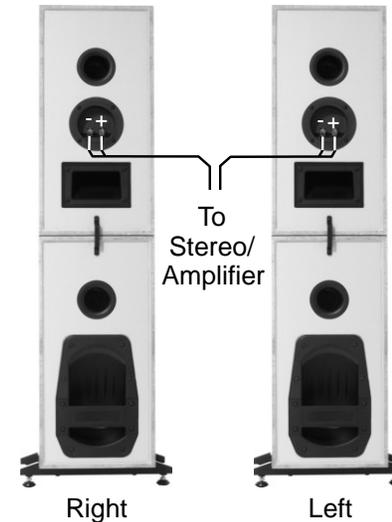


Fig. 9

In order to maintain the highest audio fidelity possible, the following speaker cable lengths versus wire gauges are recommended:

- Cable runs up to 10 feet: 18 ga.
- Cable runs up to 25 feet: 16 ga.
- Cable runs up to 45 feet: 14 ga.
- Cable runs up to 65 feet: 12 ga.

each of the right and left tower arrangements. See Fig. 8 for details.



Fig. 8

7. Install four (4) Speaker Grills on cabinets A,B,C, & D.
 - 7a. Locate two (2) 14"x8" and two (2) 8"x 8" perforated aluminum speaker grills and twenty (20) #6-32 x 5/32" stainless button head cap screws.
 - 7b. Install one (1) ea. speaker grill on cabinet A,B,C, & D using provided 5/64" hex wrench and twenty (20) #6-32 x 5/32" stainless button head cap screws. Install screws just enough to catch the first few threads without fully tightening until all screws are in place. Once all screws in place, snug screw heads to the surface of the grill with light pressure.
- NOTE!** Be very careful not to overtighten screws.
- 7c. Carefully move assembled cabinets into final position. Using a bubble level, adjust feet to level top or provide a slight slope to the rear of the speaker cabinets to aid in water run-off, if direct exposure to rain/snow is expected.
8. CONGRATULATIONS! Assembly is now complete and speakers are ready to be connected.

6. From boxes with cabinets B,D remove the top four (4) foam corner protectors and place two (2) in the up position on a solid surface. Next, locate the four (4) small blue foam squares provided and place two (2) for each cabinet as shown in Fig. 4. Finally, move each cabinet and place it face-up, with the back side resting on/in the foam corner pieces as shown in Fig. 4. This allows clearance for installation of the Base Supports.

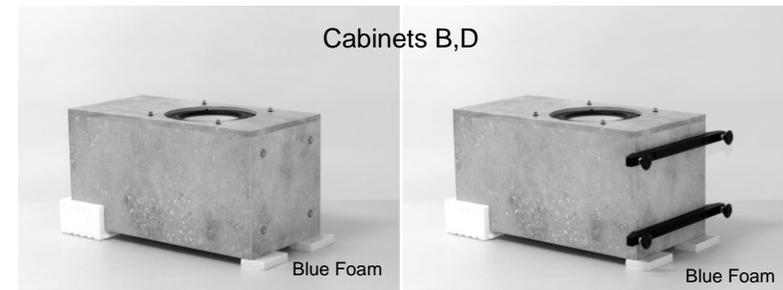


Fig. 4

Note: Save (as many as possible) boxes/shipping materials for future transport or shipment.

7. You are now ready to proceed to assembly and installation.

Assembly/Installation

1. Mount cabinet Base Supports to lower cabinets B and D.
 - 1a. Locate four (4) aluminum Base Supports and eight (8) #10-32 x 1" stainless machine screws.
 - 1b. Using a phillips screwdriver, mount 2 ea. aluminum Base Supports to the bottom of cabinets B and D with eight (8) #10-32 x 1" stainless machine screws.
- NOTE!** Be careful not to overtighten screws.
- 1c. Locate eight (8) Adjustable Feet with locknuts and thread two (2) into each of four (4) Base Supports until snug.
2. Raise two (2) bottom cabinets B and D to their upright position.
 - 2a. Locate four (4) stainless 1/4" x 3/4" and four (4) 1/4" x 1" alignment pins.

2b. Install eight (8) ea. alignment pins into top of cabinet B and D as shown in Fig. 5.

NOTE! Be very careful to install ONLY 1/4" x 3/4" pins in back holes and 1/4" x 1" pins in front holes.

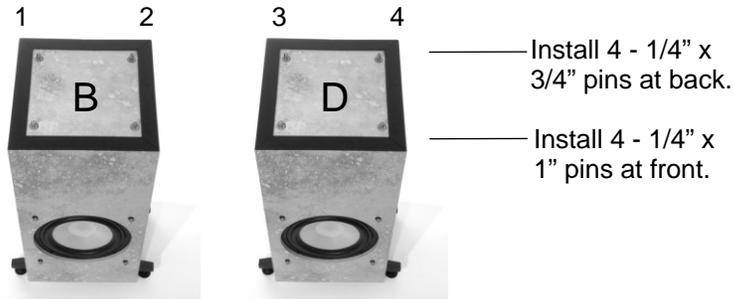


Fig. 5

3. Cabinets B and D are now ready for placement in their final installed location.

4. Move cabinets B and D to install location.

4a. Using the recessed handle in the back of cabinet B and D insert right or left hand into handle, steady the top of the cabinet with your other hand as noted in Fig. 6, carefully perform a test lift to ensure you can safely carry the cabinet. If in doubt, seek help. Once you are satisfied you can carry the weight, carefully lift and move cabinet B and D to its final install location.



Fig. 6

5. Move cabinet A and C to install location and mount to cabinet B and D.

5a. Using the recessed handles in the backs of cabinets A and C, insert right or left hand into handle, steady the top of the cabinet with your other hand as noted in Fig. 7, carefully perform a test lift to ensure you can safely carry the cabinet. If in doubt, seek help.

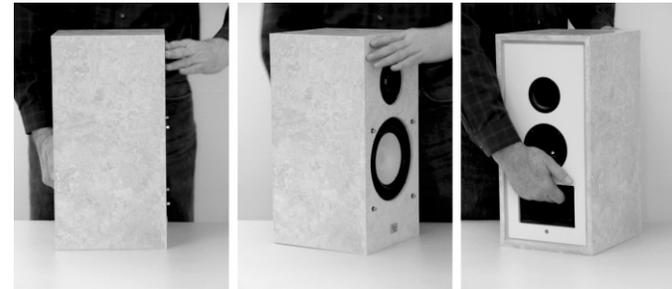


Fig. 7

5b. Once you are satisfied you can carry the weight and guide the speaker cabinet over the bottom cabinet, proceed to move each cabinet to the same location as cabinets B and D.

5c. Referring to note below, place cabinet A (S/Nx) over cabinet B (label with letter B) and align cabinet exterior edges until top alignment bushings mate to bottom alignment pins, being careful not to allow the top cabinet to drop forcefully to top of bottom cabinet. Once alignment achieved, slowly lower the top cabinet on to the bottom cabinet.

5d. Repeat above procedure for cabinet C (S/Nx+1) and D (label with letter D).

Note: Each *upper* speaker cabinet has a serial number label located on the recessed handle. These serial numbers are sequential and are numbered as follows: S/Nx = cabinet A, S/Nx+1 = cabinet C. For example, S/N 1 = A and S/N 2 = C. Each *lower* speaker cabinet has a label with the letter B or D located on the recessed handle.

6. Install two (2) Safety Brackets on rear of mounted speaker cabinets.

6a. Locate two (2) Safety Brackets, four (4) #8-32 x 1/4" stainless button head cap screws and four (4) washers.

6b. Using the provided 3/32" hex wrench, install the safety bracket on