


# Jolly Double Pendant

indoor lighting

## Assembly Instructions

By Kate Stokes

n  
a  
u

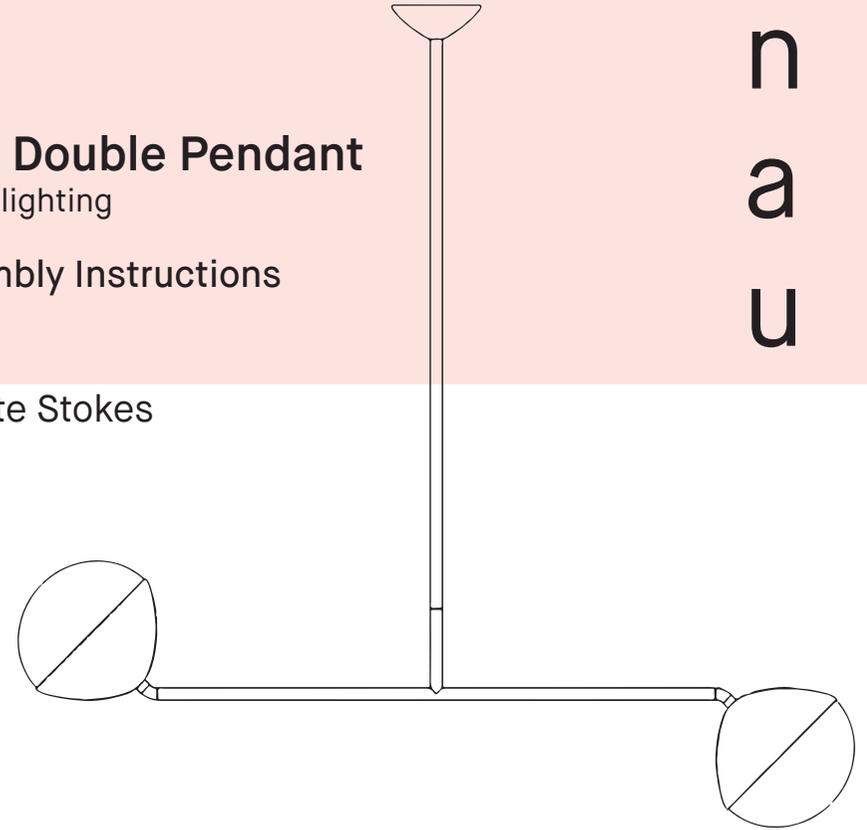

naudesign.com.au  
info@naudesign.com.au

Sydney  
21-23 Levey Street  
Chippendale NSW 2008  
info@cultdesign.com.au  
P +61 8062 6000

Brisbane  
925 Ann Street  
Fortitude Valley QLD 4006  
info@cultdesign.com.au  
P +61 7 3252 7605

Melbourne  
680 Elizabeth Street  
Melbourne VIC 3000  
info@cultdesign.com.au  
P +61 3 9066 1177

Auckland  
73 The Strand  
Parnell Auckland 1010  
info@cultdesign.com.au  
P+64 9 379 4466



Arising from the desire to create a playful lighting collection, Jolly is an exploration of form and material. Translucent, hand-blown glass is juxtaposed against solid coloured metal rods and shades to create a balance of material composition, while the asymmetric elfin-like form injects a cheerful sense of joy.


The Jolly Double Pendant comes with a 3m length of rods that can be customised to suit up to 3 metres of hang length. Available in 4 different finishes.

Compatible with G9 LED globes. Halogen globes will overheat light and void warranty


## Maintenance

Be careful when transporting and moving the pendant. Prior to cleaning or maintenance, always switch off and disconnect from the electricity supply and allow the glass bulb to cool. To remove bulb hold pendant shade in one hand and unscrew glass bulb counter clockwise. Once removed replace led globe and reverse steps above.


Repairs and the replacement of damaged cables or electrical parts should only be carried out by a qualified electrician. Your product should only be used in a dry indoor environment.

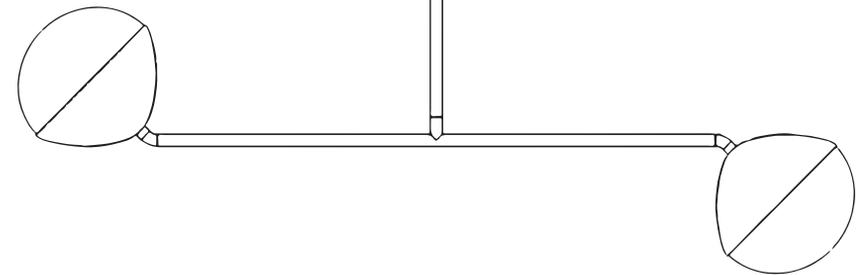


1. Place bracket on ceiling. Mark holes with a pencil. (lamp orientation can be adjusted later)

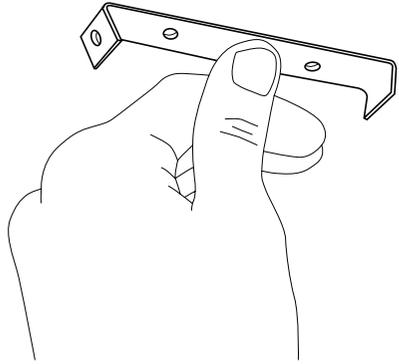


2. Fasten into ceiling with method to suit ceiling type. Use inserts if suitable.

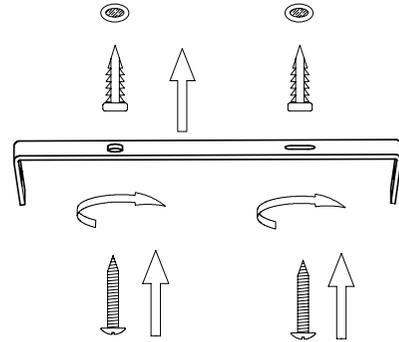


3. Work out the desired hang length and construct by screwing rods together from selection provided. The 100mm long rod should be at the top of the assembly to fix to ceiling rose. (not all rods may be needed)

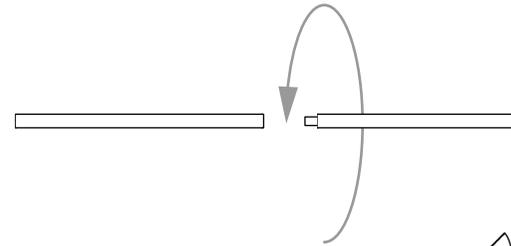


4. Thread wiring through the assembled rods and ceiling rose. Screw to the rod into the pendant and ceiling rose. (keep wire from twisting)

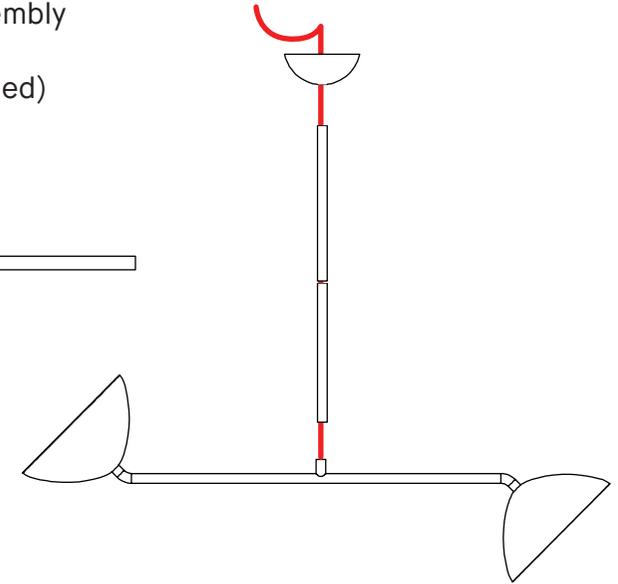


5. Once the lamp parts are all screwed together, the ceiling rose can be rotated so that you can choose the direction the pendant points in relation to the fixed ceiling bracket. (do not try to rotate lamp once it has been fixed to ceiling)

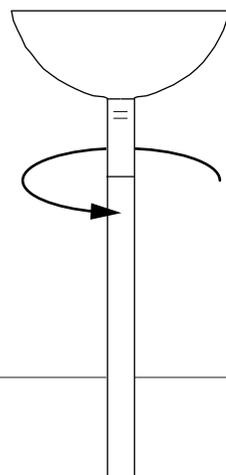

6. Wire accordingly (Cable may have to be shortened)

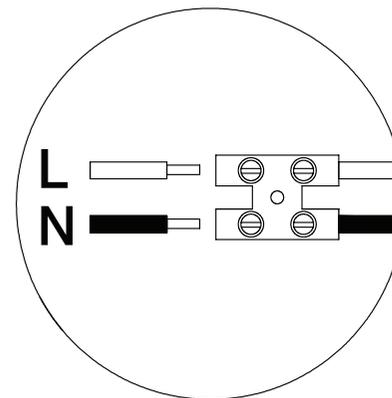


7. Fasten rose to ceiling bracket with the two fasteners supplied.

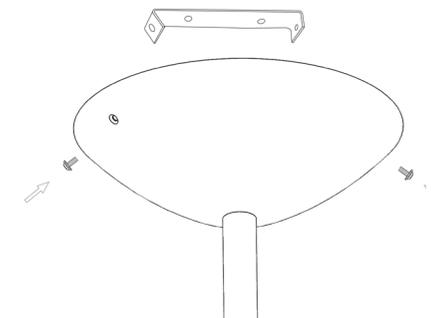


8. Insert G9 LED globes into sockets.

**Warning: Halogen globes will overheat light and might void warranty**

Carefully screw glass globe onto light socket. Glass globe should screw until tight. The metal shade should overhang the perimeter of the glass.

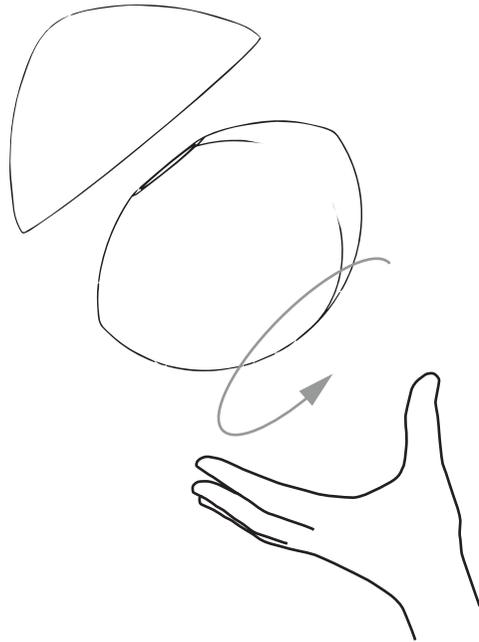

## Parts

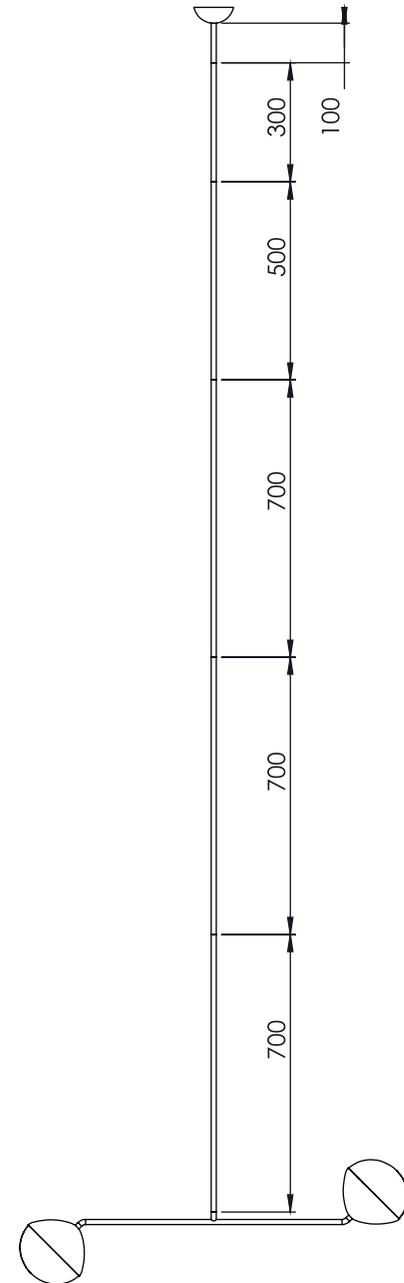

Phillips scredriver required

- includes
- 1x wired pendant
- 2x glass globes
- 1x ceiling rose
- 3 x 700mm rod
- 1 x 500mm rod
- 1 x 300mm rod
- 1 x 100mm rod



(G9 LED lights sold seperatly)

