


Jolly Wall Light

indoor lighting

Assembly Instructions

By Kate Stokes

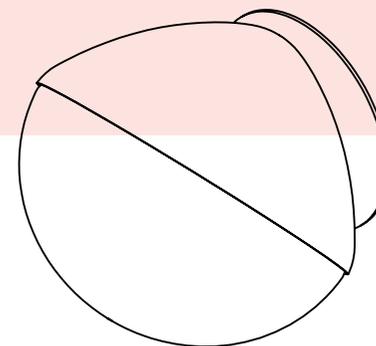

naudesign.com.au
info@naudesign.com.au

Sydney
21-23 Levey Street
Chippendale NSW 2008
info@cultdesign.com.au
P +61 8062 6000

Brisbane
925 Ann Street
Fortitude Valley QLD 4006
info@cultdesign.com.au
P +61 7 3252 7605

Melbourne
680 Elizabeth Street
Melbourne VIC 3000
info@cultdesign.com.au
P +61 3 9066 1177

Auckland
73 The Strand
Parnell Auckland 1010
info@cultdesign.com.au
P+64 9 379 4466

Maintenance

Be careful when transporting and moving the pendant. Prior to cleaning or maintenance, always switch off and disconnect from the electricity supply and allow the glass bulb to cool. To remove bulb hold pendant shade in one hand and unscrew glass bulb counter clockwise. Once removed replace led globe and reverse steps above.


Repairs and the replacement of damaged cables or electrical parts should only be carried out by a qualified electrician. Your product should only be used in a dry indoor environment.




Arising from the desire to create a playful lighting collection, Jolly is an exploration of form and material. Translucent, hand-blown glass is juxtaposed against solid coloured metal rods and shades to create a balance of material composition, while the asymmetric elfin-like form injects a cheerful sense of joy.

The Jolly wall light is suited for indoors only
Available in 4 different finishes.


Compatible with G9 LED globes sold separately.
Halogen globes will overheat light and void warranty.

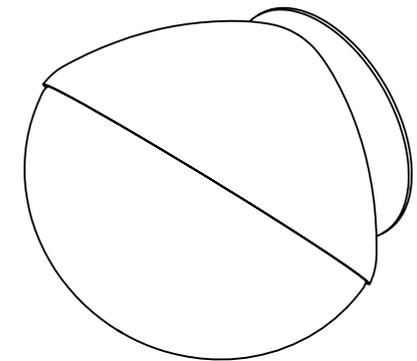


1. Unscrew the nut and carefully separate the parts to access the back of the wall mount.
DO NOT remove parts off wiring

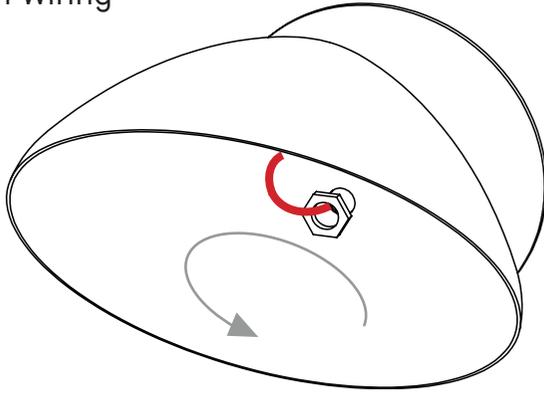


2 Wire accordingly at specified mounting location

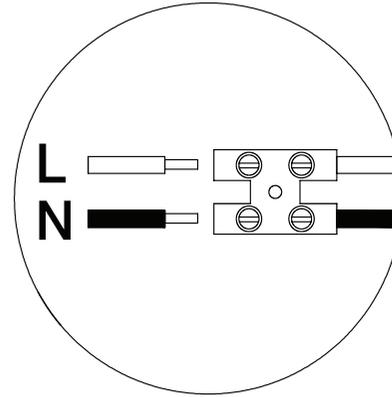


3. Screw mounting plate to wall with the 4x M5 screws provided. Excess wire should be fed into wall.

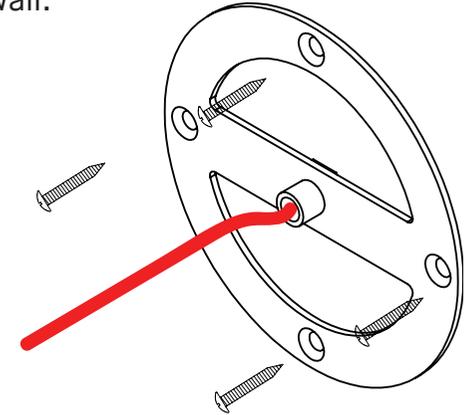

4. Slide cover plate and lamp over the threaded shaft

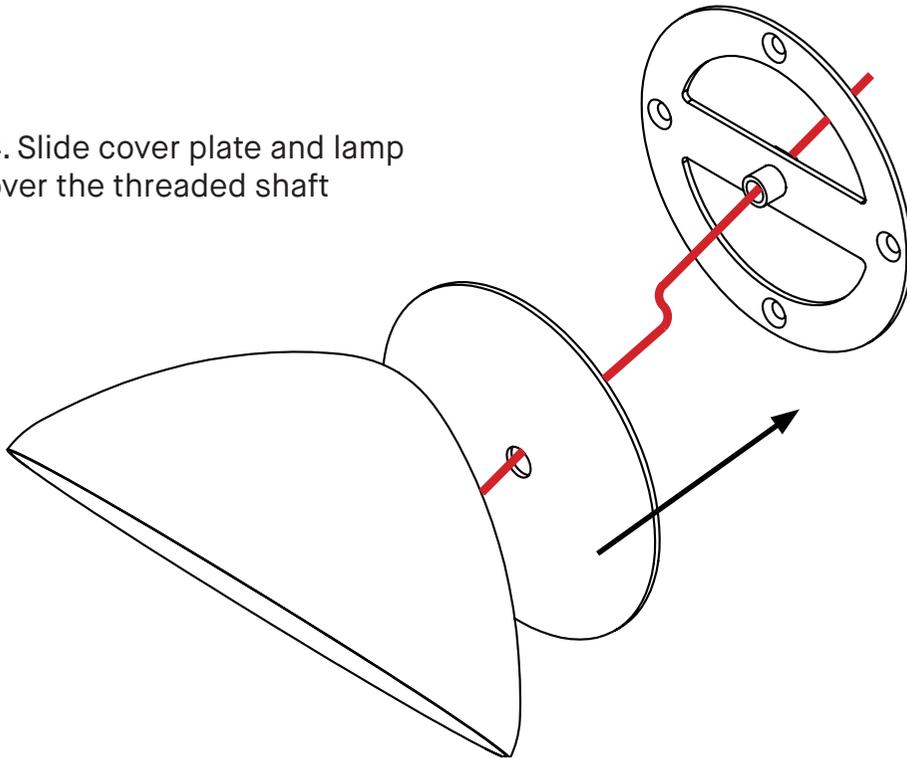


5. Tighten the nut locking the lamp to the wall. Ensure the head of the lamp is facing down before tightening

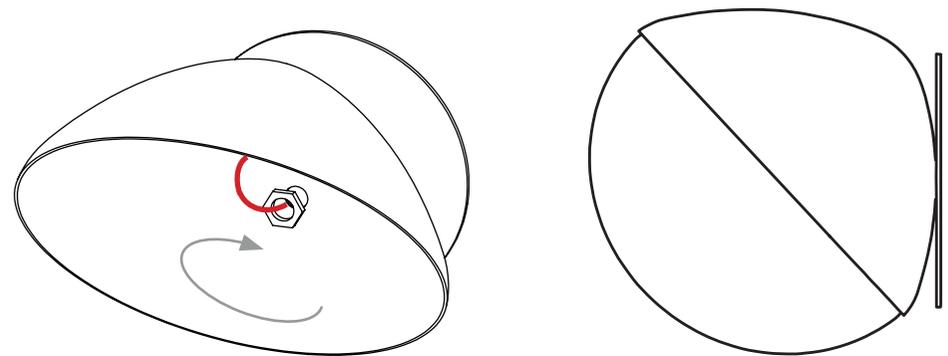

7. Insert G9 LED globes into sockets.

Warning: Halogen globes will overheat light and might void warranty

Carefully screw glass globe onto light socket. Glass globe should screw until tight. The metal shade should overhang the perimeter of the glass.

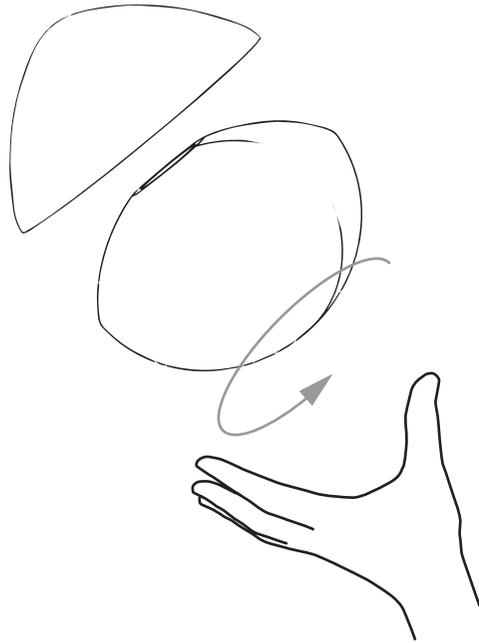

Parts

Phillips screwdriver required
14MM Spanner required

includes
1x wall light assembly
1x glass globes

(G9 LED lights sold separately)

