



# Specifications

## Multifunction Box MFN300-B

## Features


---

Nova MFN300-B is a multi-function box with a variety of auxiliary functions. It has the following features:

- 1) RS232 serial or Gigabit Ethernet port communication;
- 2) Supporting Ethernet port connection between two receiving cards or at the end;
- 3) Timer function which is able to replace timer and delayer;
- 4) Temperature detection of power distribution box;
- 5) Humidity detection of power distribution box;
- 6) Audio output;
- 7) Supporting 2-way light sensor connection to achieve automatic brightness adjustment;
- 8) Supporting Temperature and humidity module connection;
- 9) Supporting 8-way power switch control.

## Dimensions

---

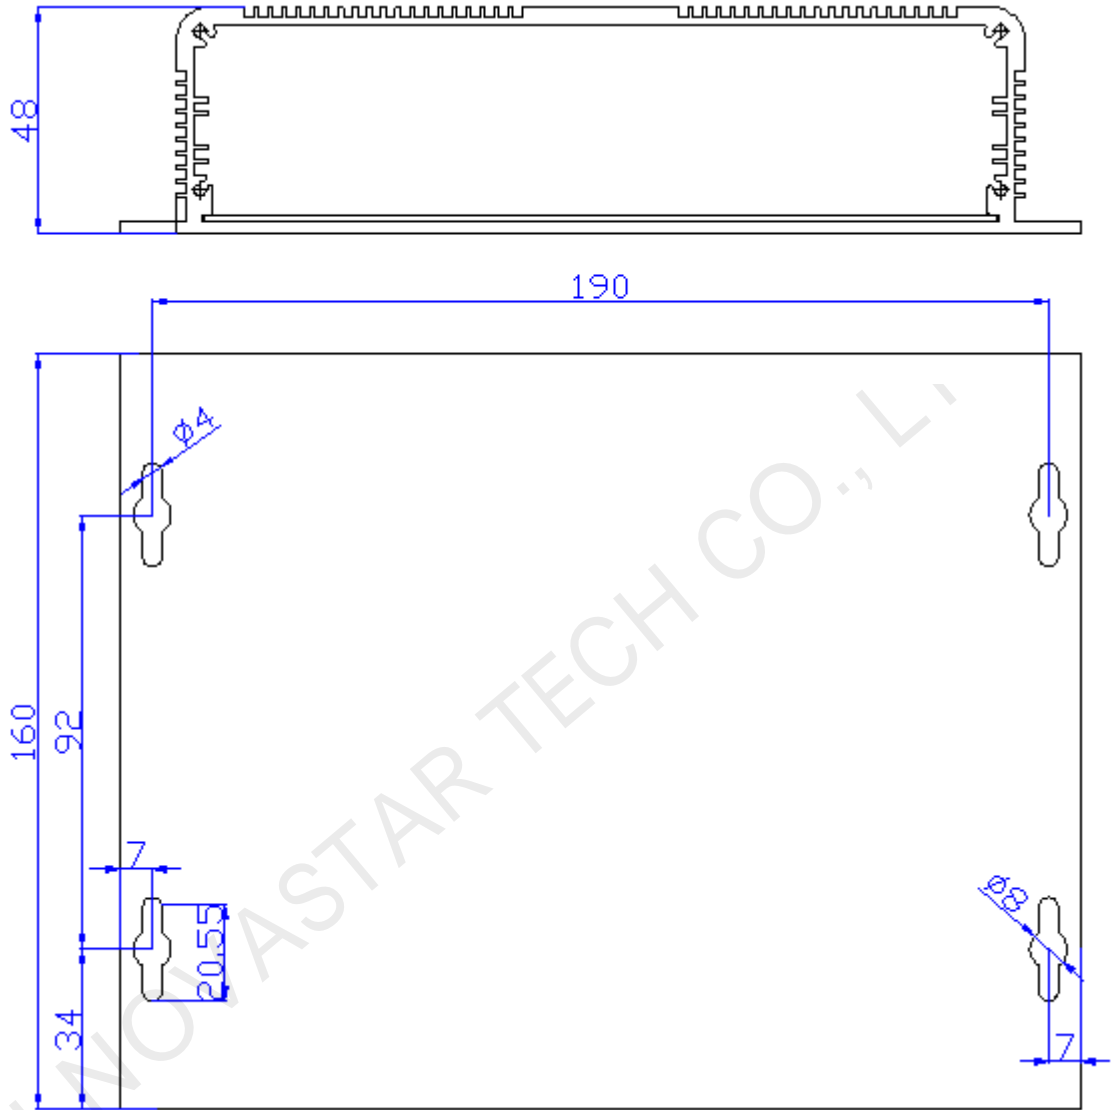

Unit: mm.

## Appearance



LED Indicator	
PWR	Power indicator, always on after power on
RUN	It blinks about twice per second when MFN300-B works normally. It doesn't blink when MFN300-B doesn't work.
LIGHT SENSOR	Light sensor interface, Temperature and humidity module interface
UART	RS232 communication interface
AUDIO	Audio output
DATA	Ethernet port , connected to sending card or resaving card
CH1~CH8	8-way power switch terminal

## Connection

---


- Connect function box to computer directly by RS232 serial cable.



- Connect function box between sending card (or independent controller) and the first receiving card.




Connect function box to the last receiving card.

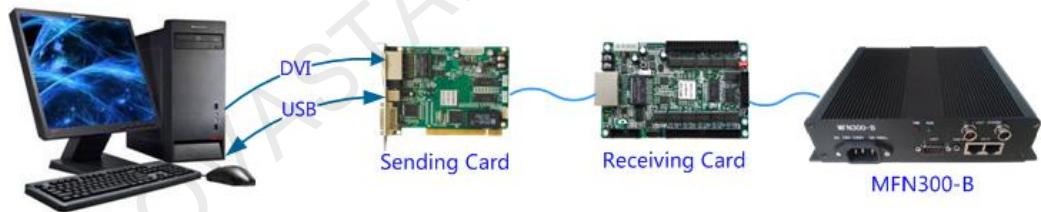

## Software Configuration

---

Run **NovaLCT-Mars** control software and click **Function Card** button to open Function Card Management page.

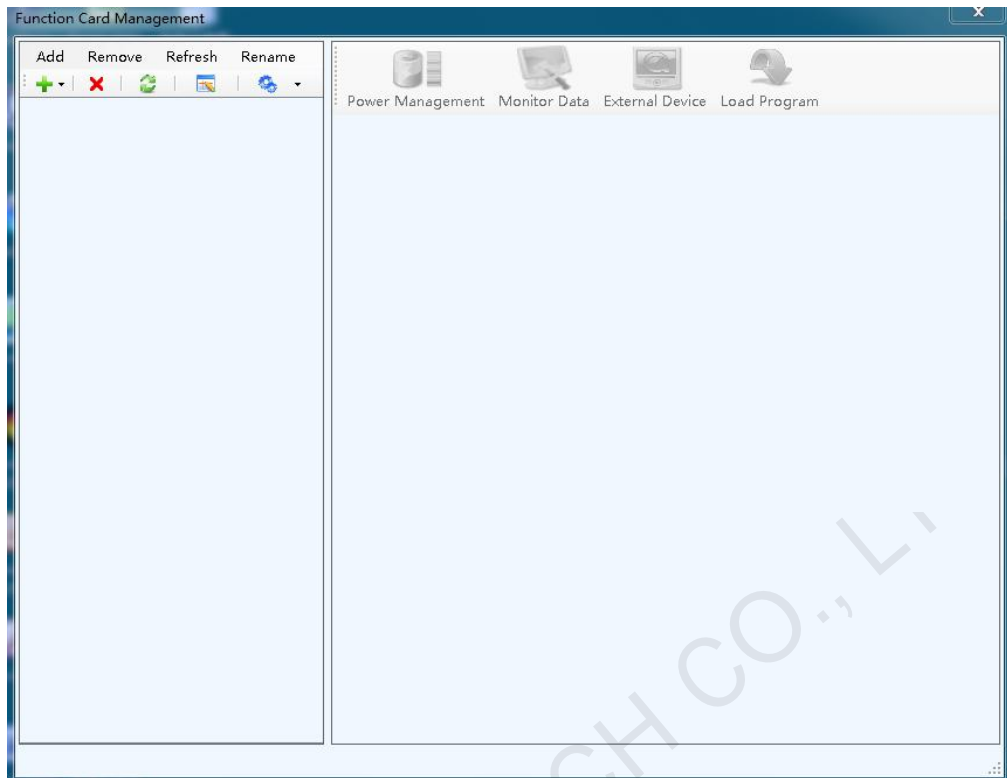

Use the menu in above Figure to configure multifunction card, including Add, Remove, Rename a Function card, Modify Serial Port and Replace Serial Port.

**Add:**

- **Serial port:** Add a multifunction card which is connected to the serial port.
- **Ethernet port:** Add a multifunction card which is connected to the Ethernet port.

**Remove:** Remove the selected node which could be a multifunction card, Ethernet port, sending card or serial port.

**Rename:** Rename the selected multifunction card.

**Serial port operation:**

Click  icon to select Modify Serial Port or Replace Serial Port.

- **Modify Serial Port:** Set the selected serial port as one that no multifunction card has been configured for.
- **Replace Serial Port:** Replace the selected serial port with one which is configured but the configured device type is different from that of actually connected, or is actually not connected.

**Note:** The icon is only available when the following requirements are satisfied: The selected node is a serial port; the device connected to it does not match the one configured to it, or the serial port is not connected.

## Specifications

---

<b>Working environment</b>				
	MIN	TYP	MAX	UNIT
Rated voltage	4.5	5.0	5.5	V
Rated current		0.38		A
Power management control voltage (V)	0		250	V
Power management control current (A)	0		3.0	A
Temperature of working environment	-20~75			°C
Humidity of working environment	0~99			%