


Meet the TOURnado™ IP COB

TOURNado™ IP COB fixtures offer spectacular high output RGB color mixing thanks to its installed 80W COB LED with a wide 60° beam angle. And like the other fixtures in our TOURnado™ series, it also sports a convection cooled cast aluminum housing with a tempered glass lens, watertight internal gaskets, and IP65 rated power and data cable input and output connections.

You can run any of the TOURnado™ IP COB's impressive built-in auto programs individually, or all together with variable speed, fade, flash settings, and perform full RGB color mixing with or without DMX control. It is the perfect lighting solution for any type of outdoor application. They come equipped with dual mounting brackets for positioning flexibility, and they have a well structured, easy to navigate LED control panel menu with 4 electronically touch sensitive navigation buttons that make programming (and button pushing) a breeze!

Set the fixture to work in standalone mode, master/slave mode, or control it via 4/5 or 8 channels of DMX, which means it will work with any controller. RGB color mixing, 7 built-in static colors, auto run mode, flash/fade mode, and access to 5 user-selectable 32-bit dimming curves are all accessible in each of its DMX modes. Its five user selectable dimming curves allow for different amounts of steps for smoother (and slower) dimming capabilities.

On the rear of the fixture are weatherproof power and DMX in/out connections with rubber plugs, and each fixture comes with 1* powerCON™ TRUE1 compatible AC power input cable, and an IP rated DMX signal cable.

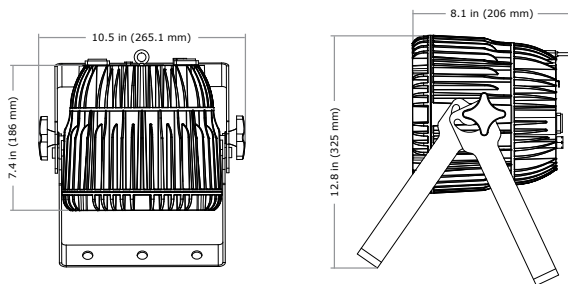

Main Features

- RGB color mixing via 1x 80W COB LED with 60° beam
- LED control panel with 4 touch sensitive electronic buttons
- Variable electronic dimming & strobe
- Built-in color & chase macros via DMX
- RGB color mixing ability in standalone mode
- Convection cooled cast aluminum housing
- Dual mounting brackets for positioning flexibility
- Flicker-free constant-current 500MA LED driver
- IP rated power and 3-pin DMX connections
- RGB & Strobe (4-Ch), Dimmer, RGB & Strobe (5-Ch), & Extended with Dimmer, RGB, Strobe, & 32-bit dimming (8-Ch) DMX Profiles

TOURNADO™

IP COB

IP65

SUITABLE FOR OUTDOOR USE



ETL Certified

Power

- Operating Voltage: 100-264VAC, 47/63 Hertz
- Power Consumption: 80W

Light Source

- 1x 80W RGB COB LED

Optical

- Beam Angle: 60 degree beam angle
- Luminous Intensity: 2,684 Lux @ 1m, 698 Lux @ 2m

Thermal

- Max. Operating Temp.: 104° F (40° C) ambient

Control

- Protocol: USITT DMX-512
- 4-button menu with LED display
- DMX Channels: 4/5/8
- Input: 3-pin XLR Male
- Output: 3-pin XLR Female
- Operating Modes: Standalone, Master/Slave, Auto Modes

Weight & Dimensions

- Width: 10.5 inches (26.5 cm)
- Depth: 7.4 inches (18.6 cm)
- Height: 12.8 inches (325 mm)
- Weight: 8.82 lbs (4 kg)