




Hi-Lux, Inc.

3135 Kashiwa Street, Torrance, CA 90505, Tel: (310) 257-8142, Fax: (310) 257-8096

H & R BUFFALO CLASSIC RIFLE BASE INSTALLTION INSTRUCTION

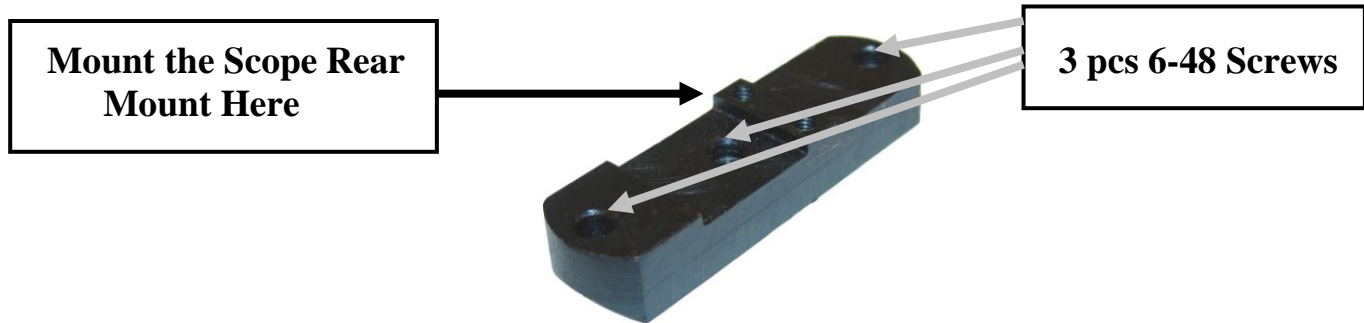

H & R Buffalo Classic Rifle Base

You need to screw the H&R Base in the back of the rifle and then to install the rear scope mount on top of the H&R base as the the picture indicates. You need to use 3 pcs standard 6-48 screws to simply screw the H&R



base in the back first and Lock-Tite the 3 6-48 screws. There is no need to drill and tap the gun. After you mounted the H&R base on the file, you can follow the scope installation instructions in the scope manual to install the long Malcolm Scope. If you have any questions about this product, please feel free to contact us at the toll free no. 1-888-HI-LUX-12 (445-8912) or send us an e-mail to :

techsupport@hi-luxoptics.com.

WARNING:

You must install the mount securely before you shoot the rifle. This should be done by a competent gunsmith.