


55-W WALL MOUNT FAUCET



55-W WALL MOUNT FAUCET

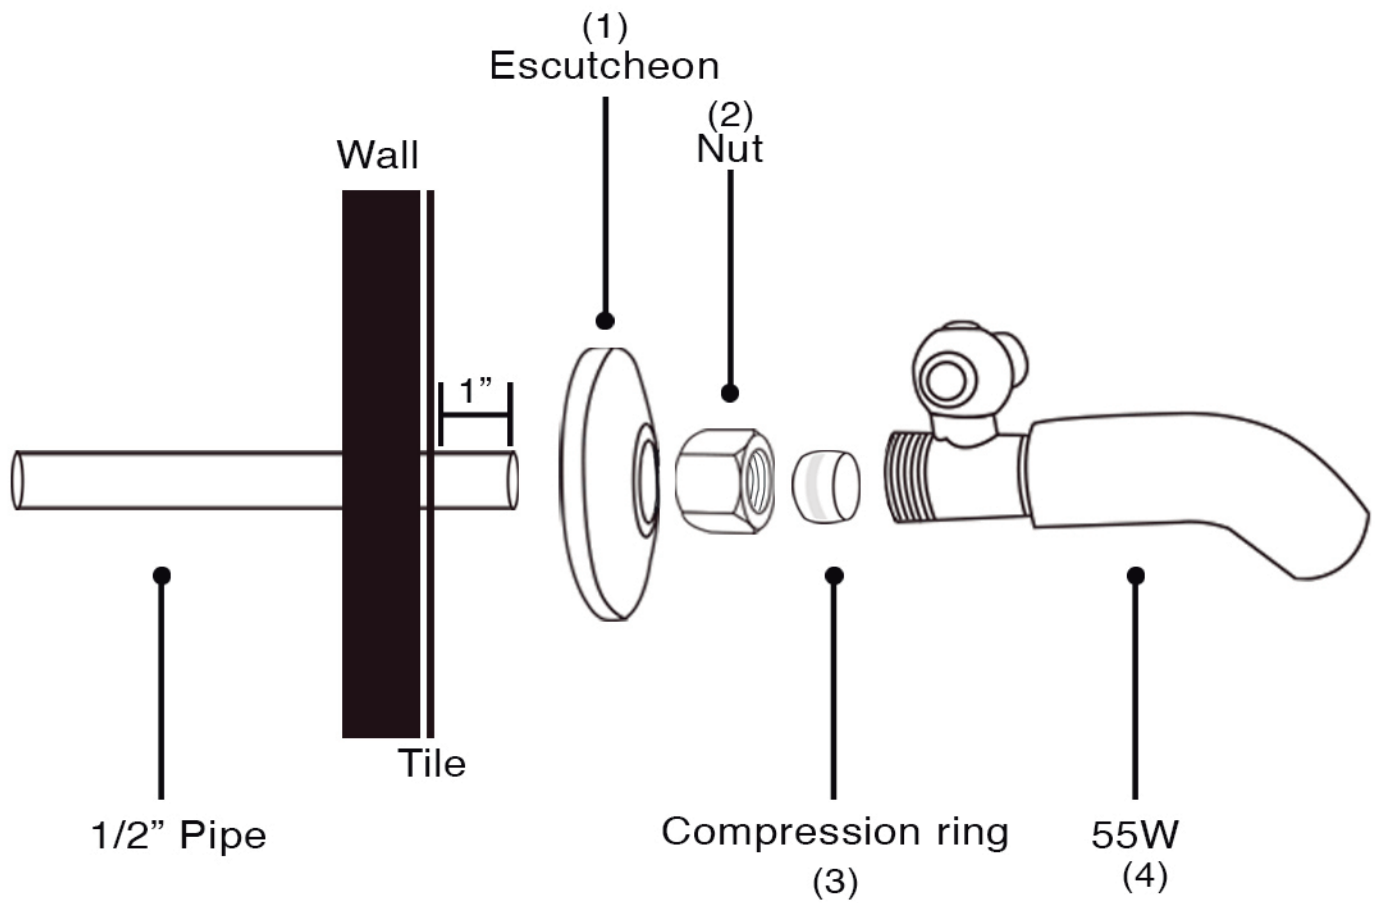

1) Where to locate the wall mount 55-W Faucet:

A) Side to Side, the position of your bathtub will determine where your faucet will be located. Once you know what wall your faucet will be located, usually the faucet the located in the center position of the bathtub on faucet wall side. From Center online, the faucet should be 3" spread, or 3" apart center of pipe.

2) Height of faucet above bathtub:

The faucet will be located 3 inches above the bathtub lip/ top. This will give room for clear waterfall.

3) Water supply:

Your water supply should be ½ copper or Pex (flex piping), the faucet come with ½ compression fittings. The pipe will extend 1 inch from the finished wall (including tile or other decorations finishing the wall)

Assembly:

4) Start with slipping (1) Escutcheon over the pipe, Next slip the (2) Nut with threads facing out over the pipe, then place (3) compression ring over the pipe. Push compression ring securely toward the wall. Last push the (4) 55-w Valve body onto the pipe, Make sure hot (Red) is on the left and Cold (blue is on the right), Tighten the nut onto the valve body, pushing the valve body while tightening the nut.

Operation:

5) The faucet will be in the off position when handles are in the 90 degree position, and on when handles are facing the same direction as the spout.

