Overview

Our range of high quality cleaning, rinsing and polishing products will enable your kitchen staff to work quickly and productively, while improving hygiene standards still further.

Our latest spray units are designed to improve the efficiency of dishwashers; our wall, ceiling and floor mounted hose reels are ideal for all kitchen wash-up areas, while the Pot Boy cleaning system provides an extremely effective method of removing encrusted or burnt deposits from pans, cookware and ovens.

In addition, the IMC A4 Burnisher is a quick, simple and safe method of bringing the shine and sparkle back to silverware, helping to extend the life of silver cutlery and other silver table items.

Electrical Connection

All electrical work must be carried out by a qualified electrician in accordance with the IEE Codes of Practice.

Product Conformity

IMC cleaning, rinsing and polishing equipment conform to the Machine Safety Directive 89/392/EEC as amended by 91/368/EEC and 93/44/EEC and are manufactured under quality system BSEN ISO 9001:2000. They also conform to the protection requirements of the Electro Magnetic Compatibility Directive 89/336/EEC and are manufactured in accordance with harmonised standards EN 50-014-1 Generic Emission and EN 50-014-2 Generic Immunity (plus product specific standards). They also satisfy the essential requirements of the Low Voltage Directive 73/23/EEC amended by 93/68/EEC.

All IMC cleaning and rinsing equipment is WRAS approved and manufactured in accordance with standards BSEN 60335-1 and BSEN 60335-2-16.

Warranty

IMC cleaning, rinsing and polishing equipment come with one year parts and labour warranty (subject to usage and regular maintenance as laid down in the operation and installation manual).

Spare Parts

Spare parts are available for all major serviceable items. Please contact:

IMC service telephone: +44 (0)1923 718017 IMC spares telephone: +44 (0)1923 718018 Fax: +44 (0)1923 896256 E-mail: parts@imco.co.uk



Harvey Road Croxley Green Hertfordshire WD3 3AX United Kingdom

Tel: +44 (0)1923 718000 Fax: +44 (0)1923 777273 Email: cleaning@imco.co.uk

www.imc.co.uk


Specifications are subject to change without notice.

4CM/CLEANTS/0106UK




Technical Information Cleaning, Rinsing and Polishing






Pre-Rinse Sprays General		
Hose length	3m	
Dimensions (h x d)	866mm x 340mm	
Installation information		
Water connection	PR1-1/2" BSP F PR2 & PR3-15mm compression joint	
Water feed	15mm copper pipe	
Water pressure range	0.4 to 5 bar (4 to 50m head)	
Water temperature	65°C (150°F) maximum	
Fixings	Wall bracket adjustable 35mm - 180mm	
Features		
	Lightweight heat insulated spray head	
	Protective rubber bumper on spray head	
	Stainless steel spirally wound covered hose	
	Stainless steel vertical tube	
	Wall bracket for vertical tube	
Product code details		
F63/100	PR1 With water connection	
	PR2 With single tap	
F63/300	PR3 With mixer tap	
O63/PRA11	Bracing Spray for island locations	
Shipping specification		
Packing dimensions (h x w x d)	1220mm x 440mm x 80mm	
Packing volume	0.042m ³	
Packing weight (gross/net) PR1	5kg/4kg	
Packing weight (gross/net) PR2	6kg/5kg	
Packing weight (gross/net) PR3	7kg/6kg	




General	
Reach of hose RK15	4.5m (15ft)
Dimensions (h x w x d)	560mm x 92mm x 313mm
Reach of hose RK35	10m (35ft)
Dimensions (h x w x d)	640mm x 194mm x 384mm
Installation information	
Water pressure range	2.1 to 13.8 bar (30 to 200 PSI)
Water temperature	82°C (180°F) maximum
Water connection	3/8" IPS Female
Water feed	15mm copper pipe
Features	
	Reinforced rubber hose
	Re-coil system
	Built-in multi-bracket for wall or ceiling mounting
Product code details	
U05/013	Reel Kleen 15 (RK15)
U05/012	Reel Kleen 35 (RK35)
Shipping specification	
Reel Kleen 15 (RK15)	
Packing dimensions (h x w x d)	390mm x 330mm x 18mm
Packing volume	0.023m ³
Packing weight (gross/net)	9kg/8kg
Reel Kleen 35 (RK35)	
Packing dimensions (h x w x d)	510mm x 290mm x 380mm
Packing volume	0.056m ³
Packing weight (gross/net)	17kg/14kg






Pot Boy		
General		
Reach of hose	1.5m	
Dimensions (h x d)	245mm x 625mm x 265mm (not including pipework)	
Safety	Hydraulic brush head system provides electrical isolation and	
Ca.c.,	overload protection.	
Electrical Information	'	
Motor	0.37kW (0.5HP)	
Voltage	220/240-1-50	
Fuse rating	1 phase (13A)	
Installation information		
Head spead	360rpm	
Hydraulic fluid pressure	30 bar	
Mounting height	1.15m above sink	
Power Supply	Requires suitable fused power supply within 2m of machine.	
	Supplied with 2.5m cable.	
Features		
	Wall mounting plate	
	Foot operated pneumatic switch	
	Long lasting nylon brush head	
	Magikut exterior scrubber	
Customer options		
Options	Mobile trolley with 500mm x 500mm dishwasher tray	
Product code details		
F64/100		
	Mobile trolley with 500mm x 500mm dishwasher tray	
	Long lasting nylon brush head	
	Magikut exterior scourer (5 pads)	
Shipping specification		
Pot Boy		
Packing dimensions (h x w x d)	660mm x 290mm x 710mm	
Packing volume	0.14m³	
Packing weight (gross/net)	32kg/28kg	
Trolley		
Packing dimensions (h x w x d)	630mm x 420mm x 770mm	
Packing volume	0.20m ³	
Packing weight (gross/net)	10kg/9kg	




A4 Burnisher General		
- Capacily	Silver items up to 260mm diameter	
Dimensions (h x w x d)	910mm x 1220mm x 710mm	
Lid open height	1500mm	
Electrical information		
Motor	0.25kW (0.33HP)	
Voltage **	220/240-1-50/60	
	380/415-3-50	
Fuse rating	1 phase (10A) or 3 phase (5A)	
Features		
	70kg steel balls	
	10kg burnishing powder	
	1kg degreasant	
	Teapot rod	
	Division plates	
Product code details		
-	1 phase A4 burnisher	
F62/320	3 phase A4 burnisher	
	10kg burnishing powder	
	1kg degreasant	
	5kg steel balls	
	25kg steel balls	
Shipping specification		
Packing dimensions (h x w x d)	1280mm x 770mm x 1050mm	
Packing volume	1.035m ³	
Packing weight (gross/net)	263kg/226kg	

 $^{^{**}}$ other voltages available on request


Spray Units

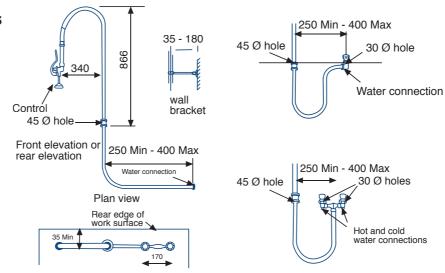

Reel Kleen



Pot Boy

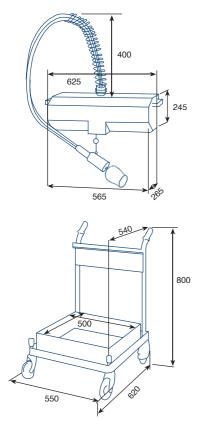

A4 Burnisher

