

## Fume Filtration Units

### Key Features

- Type: Electric
- Air re-circulation
- Three part filtration system
- Illumination
- Overheat/fire protection
- Suitable for use over electric units only up to 9kW



13

### Construction

- Body: stainless steel grade 430
- Filters: Aluminium mesh and carbon

### Available Options


- Choice of widths

### Available Accessories

- N/A

## Specifications

Model	L3	L4
External height (mm)	545	545
External width (mm)	915	1295
External depth (mm)	610	610
Net weight unpacked (kg)	25	44
Volume of air filtered per hour (m <sup>3</sup> )	460	690
Gross weight packed (kg)	31	50
Shipping volume (m <sup>3</sup> )	0.497	0.657
Total electrical power rating (kW)	0.35	0.45
Electrical supply 1N~ +E 230V 50-60Hz Current Rating (A)	1.5	2.0

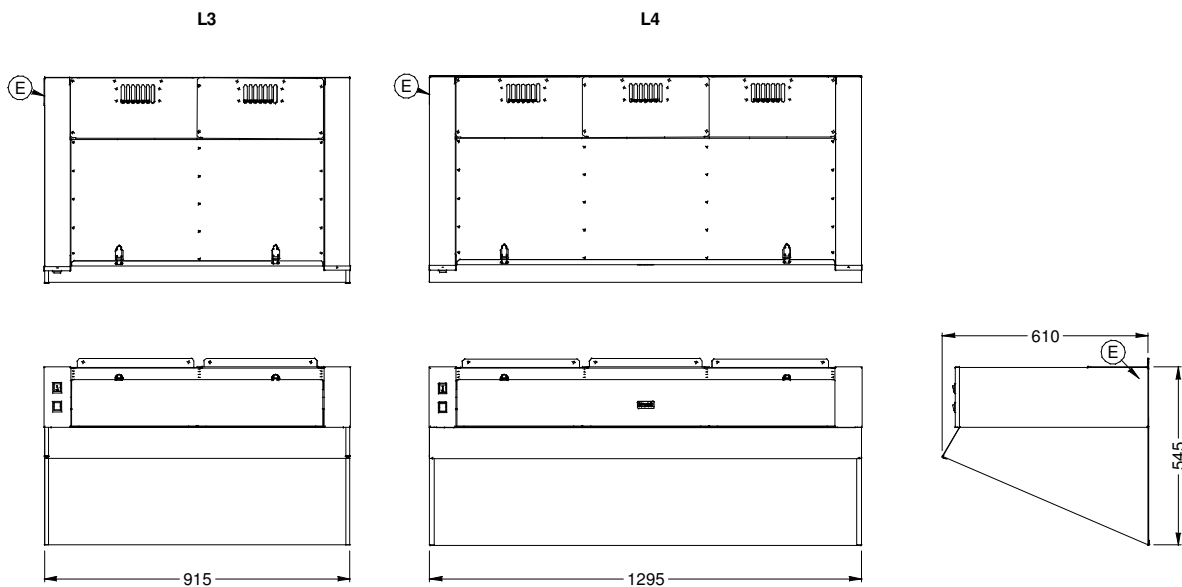

Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
 Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:  
FUMEFILTRATION  
Issue date: Oct-09