

In-Counter Dispensers



In-Counter Ambient Plate Dispenser
Model DUP1

In-Counter Ambient Plate Dispenser
Model DUP2


Tubes have four adjustable guides to enable it to take various size plates for 8"-12" (205mm-305mm) diameter with a maximum capacity of 65 plates per tube. The Dispenser comes with a variable spring system to accommodate different weights of plates. Impact resistant ABS cover available as an option.



In-Counter Heater Plate Dispenser
Model DHP1

In-Counter Heater Plate Dispenser
Model DHP2

The heated version offers the same capacities and comes complete with mains lead and 13 amp plug as standard or can be supplied with a wiring loom for counter control panel connections. **(This must be specified at time of order).** Temperature controlled by internal thermostat with surface level illuminated on/off switch for easy operation. Heated units come complete with an impact resistant ABS cover to each tube as standard.

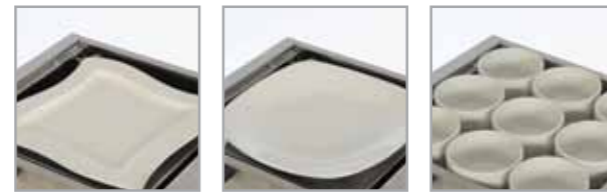


Designed for the storage and dispensing of any size or shape of plate, be it round, oval, square or designer shape, that can fit within a 305mm (12") square.



In-Counter Universal Crockery Dispensers
Drop In units - Model DHD1 [heated],
Model DAD1, [non heated]

- Ideal for oval or square designer type plates
- Well proven elements/components provide evenly distributed heat
- Factory set thermostatic control at 60° C
- Interior finished in clinical bright polished stainless steel
- Complete with stainless steel lid
- Capacity approximately 65 plates per tube depending on type, profile and thickness
- Heated units supplied with a 2 metre long cord set with moulded 13 amp plug for easy installation. [13A 230V 50Hz]
- Simplistic easy adjustable spring systems allows repeated pop up plate presentation.

a=overall length of unit
b=overall depth of unit
c=height of above counter section
d=height of in-counter section
e=height of stainless steel top section
f=length of in-counter section
g=depth of in-counter section

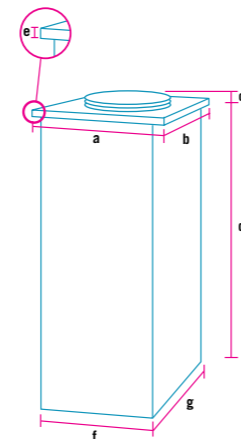

Drop-In Accessories



2-tier Display Shelf
Model D2DS

This unit, constructed from robust stainless steel, has elevated sloping shelves for maximum display.


Drop-in Cutlery/ Condiment Dispenser
Model D2CC

This versatile unit can be used in a drop-in configuration so that cutlery is at counter top level or as a freestanding unit sitting on top of a counter as shown. The stainless steel unit has 2 plastic containers for cutlery and eight stainless steel containers for pre-packed condiments.



Drop-in Soup Dispenser
Model D2SD

The stainless steel dispenser is fitted with a dry heat well and is designed to keep pre-cooked soup at serving temperature. It is supplied with two 4.5 litre stainless steel round pots complete with lids and a removable drip tray.

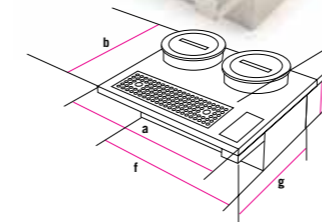

Drop-in 4-ring Cooking Hob
Model D4CH

Cooking Hob model with four spillage-sealed, high-speed, heavy-duty circular hotplates, each controlled by a six-way switch.



Drop-in 2-ring Cooking Hob
Model D2CH

Cooking Hob model with two spillage-sealed, high-speed, heavy-duty circular hotplates, each controlled by a six-way switch.



Roll Under Hot Cupboards for Drop-In units



- Outer panels are made from satin polished 430 grade Stainless Steel.
- Tops are made from satin polished 304 grade Stainless Steel.
- Inner panels are made from bright polished 430 grade Stainless Steel.
- Top hung sliding doors.
- Base shelf only c/w rodded shelves.
- Sahara fan heating.
- Hot cupboards come complete with 2m cable and 13amp plug.
- Units completely mobile on castors.

MODEL	DUP1	DUP2	DHP1	DHP2	Universal Heated Crockery Dispenser	Universal Crockery Dispenser	D2DS	D2CC	D2SD	D2CH	D4CH	HC85RU	HC115RU	HC145RU	HC175RU	MODEL
Weight kg	15	27	16	28	DHD1	DAD1	10	15	8	7	12	50	70	85	95	Weight kg
Dimensions					13	11	610	800	550	650	650	850	1150	1450	1750	Width mm
a mm	400	400	400	400	420	420	500	550	450	300	550	600	600	600	600	Height mm
b mm	400	740	400	740	345	345	650	500	95	50	50	600	600	600	600	Depth mm
c mm	25	25	25	25	15	15	-	-	180	50	50	600	600	600	600	Power rating kw
d mm	645	645	645	645	650	650	-	-	25	25	25	1.0	1.0	1.0	2.0	
e mm	25	25	25	25	25	25	-	-	530	625	625					
f mm	375	375	375	375	390	390	-	-	430	275	525					
g mm	375	715	375	715	315	315			0.7	3.0	7.0					
Power rating kw	-	-	0.6	1.2	0.6	-			-	-	-					
Plate Dimensions	8"-12"	8"-12"	8"-12"	8"-12"	Single	Twin				2	4					
Inches/mm	203mm	203mm	203mm	203mm	305	305										
	-305mm	-305mm	-305mm	-305mm	12	12										
No. of Plates	65	2 x 65	65	2 x 65	65	150										

All electrical units under 3kw complete with mains lead and 13 amp plug.