

# DSE / PFC SERIES MODELS

VENTLESS/HOODLESS COUNTERTOP DEEP FRYER

*Advanced by Design*



- SELF VENTING
- ODORLESS
- HEPA STYLE AIR FILTRATION
- INTEGRAL FIRE SUPPRESSION OPTION
- PROGRAMMABLE CONTROLS
- EASY TO CLEAN
- SMALL FOOTPRINT
- LARGE OUTPUT
- MODULAR DESIGN



**Malibu**  
CORPORATION LTD.

0161 874 5400 [www.malibu-corporation.com](http://www.malibu-corporation.com)


*The Benchmark in Ventless Deep Frying*




## CLEARANCES

### CLEARANCES

1" all around and 0" on top.

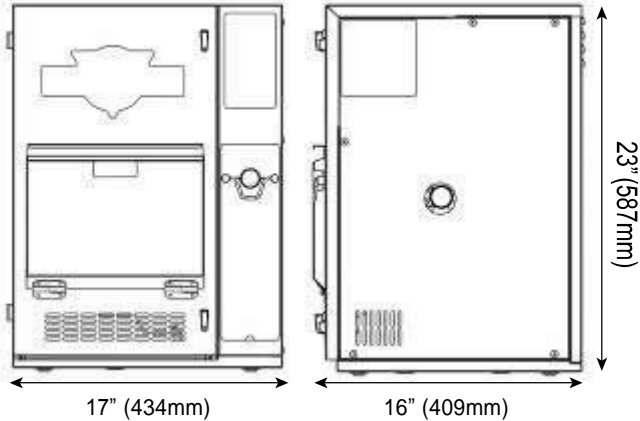

## AIRFLOW DIAGRAM

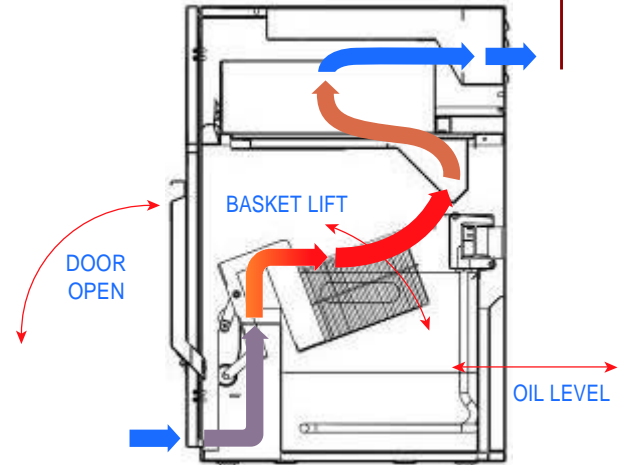

## SPECIFICATIONS TABLE


MODEL	DSE 3000	DSE5700
PART NUMBER	FMPFDSE3000*	FMPFDSE5700*
POWER SUPPLY (volts)	240	240
CURRENT (amps)	13	24
CIRCUIT CURRENT (amps)	20	30
CORD OPTION	Power Cord,	Power Cord,
POWER (kilowatts)	3.0	5.7
CAPACITY (lbs/hr)*	22	45
BASKETS (included)	1 Extra Large	1 Extra Large

\*Models with optional built-in fire suppression systems are FMPFPFC300 and FMPFPFC5700 for 3kw and 5.7kw models respectively. All other specifications are the same.

## BASKETS

### OPTIONAL BASKET COVER

(ordered separately  
part no. 6HT002)

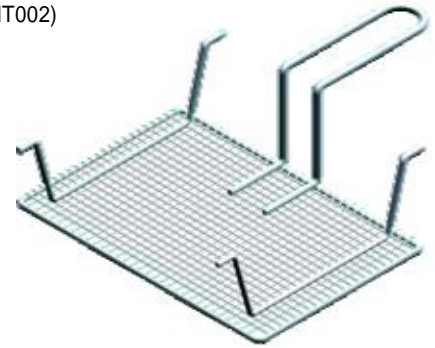

## GENERAL SPECIFICATIONS

### (All Models)

\*Based on up to 1 1/2 minute fast fries.

\*\*For use on an individual branch circuit rated 30A minimum. For supply connectors, use minimum no. 10AWG wire (30A rated). This fryer must be properly connected to a grounded, dedicated 208 VAC single phase circuit according to local installation standards and codes.

Phase	Single (3 wire)
Cycles	50/60 Hz
Weight	80 lbs (36 kg)
Shipping Weight	95 lbs (43 kg)
Shipping Dimensions	Depth 22" (559 mm) Width 22" (559 mm) Height 27" (686 mm)
Shipping Cube	7.56 ft <sup>3</sup> (.214 m <sup>3</sup> )
Oil Capacity	2 US Gallons (8 L)
Construction	304 Stainless Steel

### EXTRA LARGE (32oz/6 servings)

