

1-2. glasswashers and hood type dishwashers

peristaltic dosing pumps

SEKO dosing pumps comply with the provisions contained in the following international standards: **73/23CEE of 19/2/73**
89/336CEE of 3/5/89 • EN60335-1 • ISO 9001 (version 2000)




Safe and Reliable

Polypropylene enclosure
extremely shockproof and resistant to chemical aggression

IP 65 protection degree and **class 2 electrical insulation**
(no ground connection required)


Extra-strong and long life Santoprene and sekobril squeeze tubing, always equipped with inlet-outlet fittings for fast and safe connections

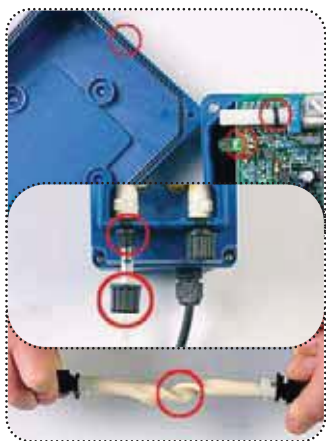

User friendly

Via trimmer settings simple and fast parameters configuration

Plugs for protecting settings to avoid undesired tampering




Easy installation Minimum maintenance

Easy wall mounting and removing thanks to the fixing brackets

Plugs on circuit board provide for a quick electrical connection

Easy tubing replacements.
There's no need to start the pump

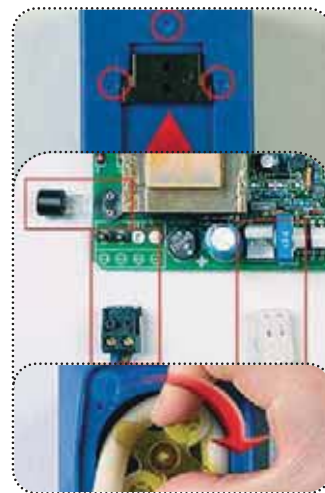

Detergent

PA Fixed speed peristaltic pump with analogic dosing adjustment by conductivity probe



Power supply 230 Vac 50-60 Hz (24 Vac 50-60 Hz upon request)

Power consumption 3.5 W

PA 6 (Santoprene squeeze tubing) **0.1 bar** **6 lt/h**

PA 9 (Santoprene squeeze tubing) **0.1 bar** **9 lt/h**

PR Peristaltic pump with analogic speed adjustment



Power supply 230 Vac 50-60 Hz (24 Vac 50-60 Hz upon request)

Power consumption 3.5 W

PR 4 (Santoprene squeeze tubing) **0.1 bar** **0.6...4 lt/h**

PR 7 (Santoprene squeeze tubing) **0.1 bar** **1.2...7 lt/h**

PRT Fixed speed peristaltic pump with analogic adjustment of dosing time



Models powered via single or double solenoid valves available.

Two setting trimmers enable detergent Initial Charge and Make Up Charge.

Power supply 230 Vac 50-60 Hz (24 Vac 50-60 Hz upon request) • **Power consumption** 3.5 W

First Charge time 18 to 180 sec. • **Top Up time** 2 to 15 sec.

PRT 6 (Santoprene squeeze tubing) **0.1 bar** **6 lt/h**

PRT 9 (Santoprene squeeze tubing) **0.1 bar** **9 lt/h**

Rinse Aid

PR Peristaltic pump with analogic speed adjustment



Power supply 230 Vac 50-60 Hz (24 Vac 50-60 Hz upon request)

Power consumption 3.5 W

PR 1 (sekobril squeeze tubing) **3 bar** **0.2...1 lt/h**

PM Fixed speed peristaltic pump with analogic adjustment of dosing time



A trimmer enable rinse aid dosing time.

Power supply 230 Vac 50-60 Hz (24 Vac 50-60 Hz upon request)

Power consumption 3.5 W • **Dosing Time** 1 to 25 sec.

PM 0.4 (sekobril squeeze tubing) **3 bar** **0.4 lt/h**

PM 1.5 (sekobril squeeze tubing) **3 bar** **1.5 lt/h**