

TUC-24-HC

Undercounter Foodservice Refrigerator, 1 Solid Swing Door



Dimensions	
External Width (mm)	610
External Depth (mm)	629
External Height (mm)	802
Exclusions	Depth does not include 26 mm for rear bumpers.
Net Volume (Litres)	94
Gross Volume (Litres)	158
Supplied Shelves	2
Shelf Size (L x D mm)	One 508 x 352 + One 508 x 273
Internal Net Height (mm)	600
Unpackaged Weight (kg)	60
Packaged Weight (kg)	71
Packaged Dimensions (W x D x H mm)	788 x 762 x 1042
Supplied Supports	Built-in recessed castors (7mm clearance)

Build	
Door Description	1 Solid Swing Door
Door Opening	Right (standard) or Left. Field Reversible.
Exterior Construction	Stainless steel front & countertop, aluminium sides & rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	Zero back and sides
Cord Length (Meters)	2.13
Standard w/ Locks	standard

Technical	
Temperature Holding	0.5 : 3.3°C
Refrigerant	R290
Voltage / Frequency / Phase	220-240V/50-60Hz/1
Amps	1
Wattage	230
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Testing Standard	EN 16825
EEC	A
EEl	19.5
kWh/24hr	1.08
kWh/Annum	395
Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
Europe
Australia


0800 783 2049
+49 (0) 7622 6883 0
+61 2 9619 9999

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com



TUC-24-HC

Undercounter Foodservice Refrigerator, 1 Solid Swing Door

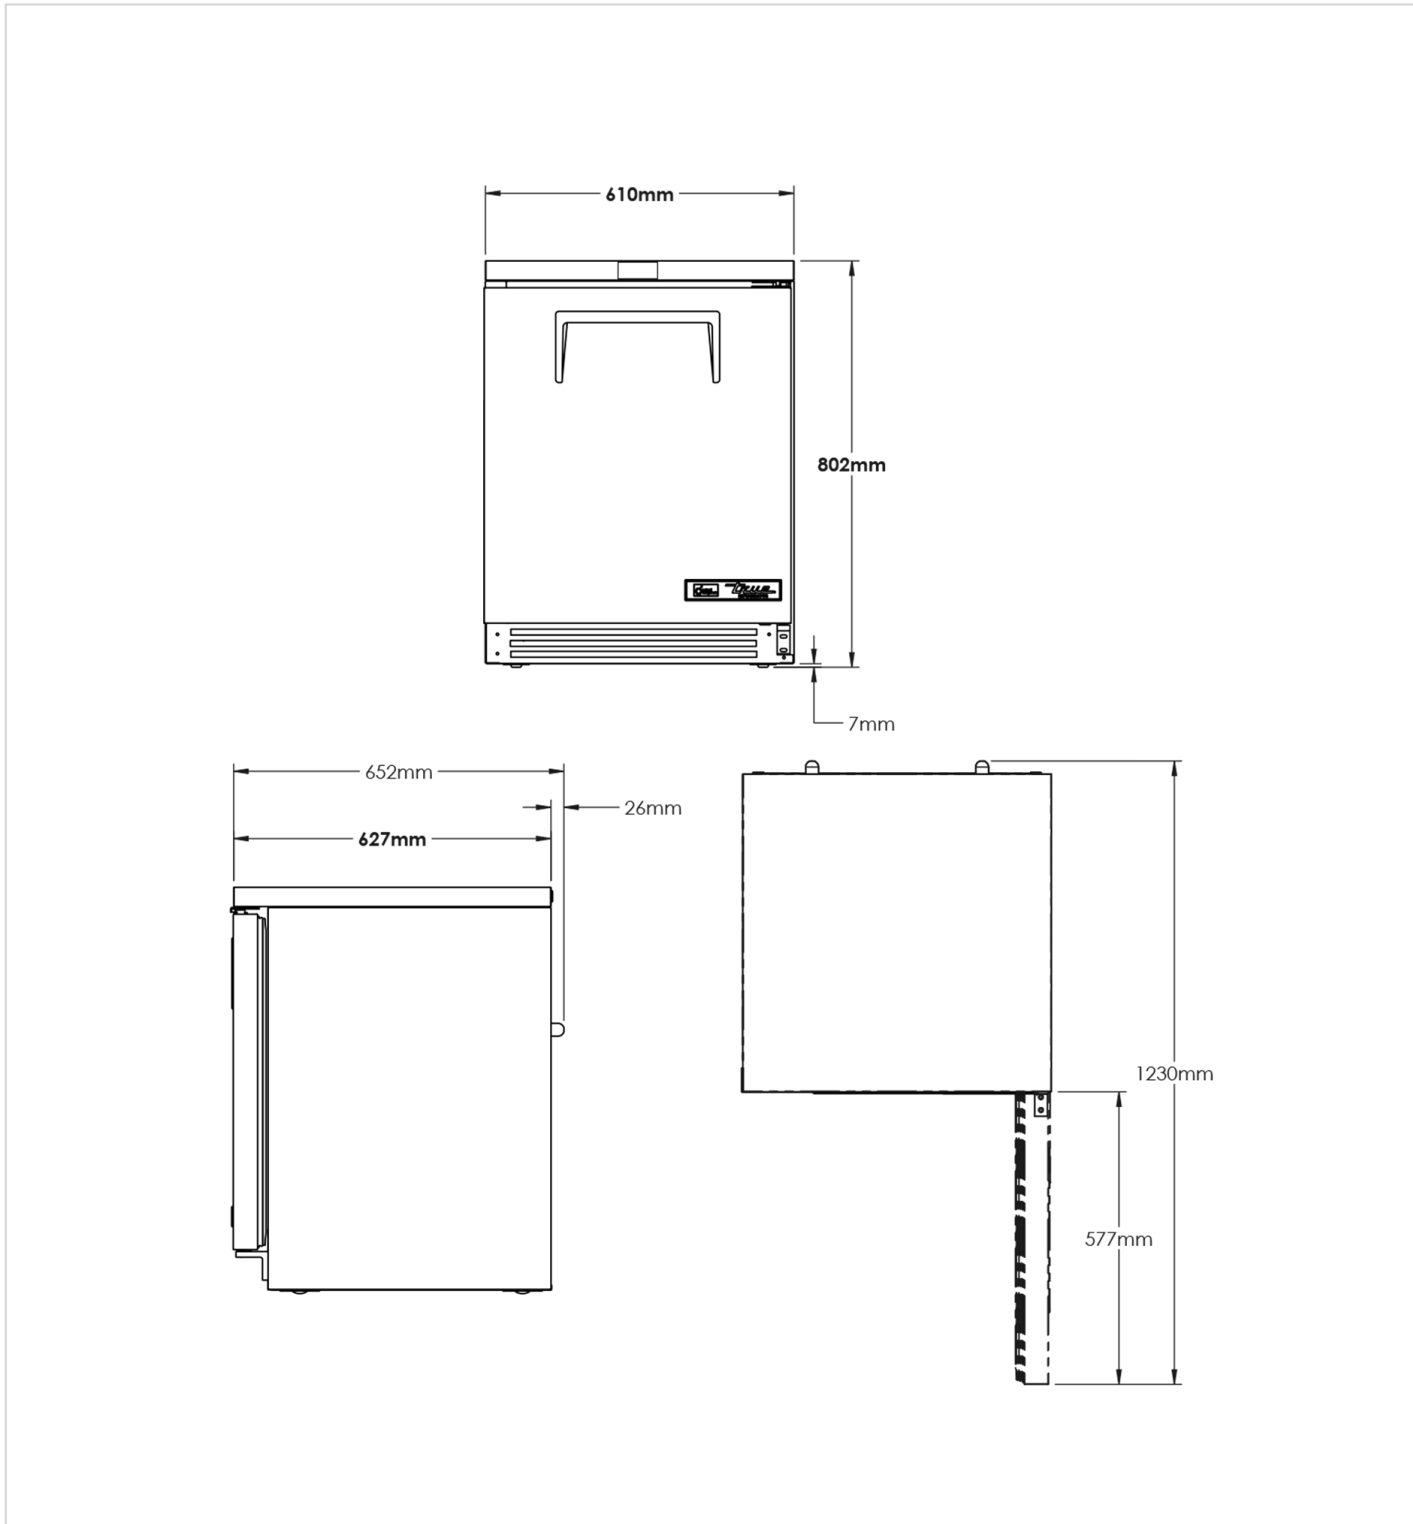

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
Europe
Australia

0800 783 2049
+49 (0) 7622 6883 0
+61 2 9619 9999

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com

