

2009 - 2014 F150 GEAR SELECTOR INSTRUCTIONS

STEP 1

Pull up on your center console trim piece to release four tabs located in the photos below.





This will allow you to lift your center console trim piece up so it can be removed.



STEP 2


Use a small flathead screwdriver to press down on the tabs to release your gear selector piece.

Once these four tabs are released it will allow the gear selector piece to be raised up so the gear selector bulbs can be accessed.

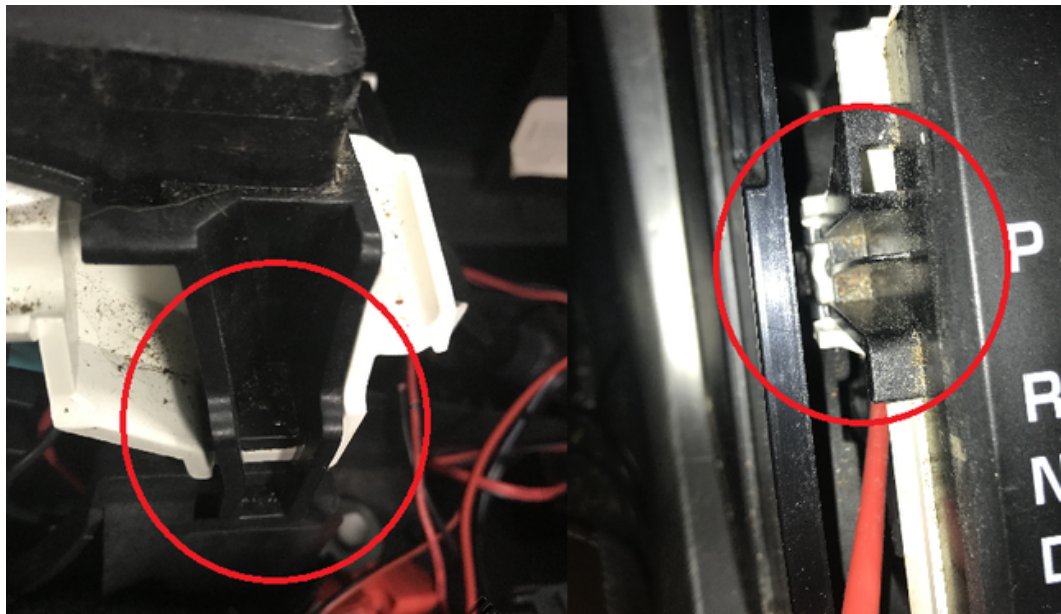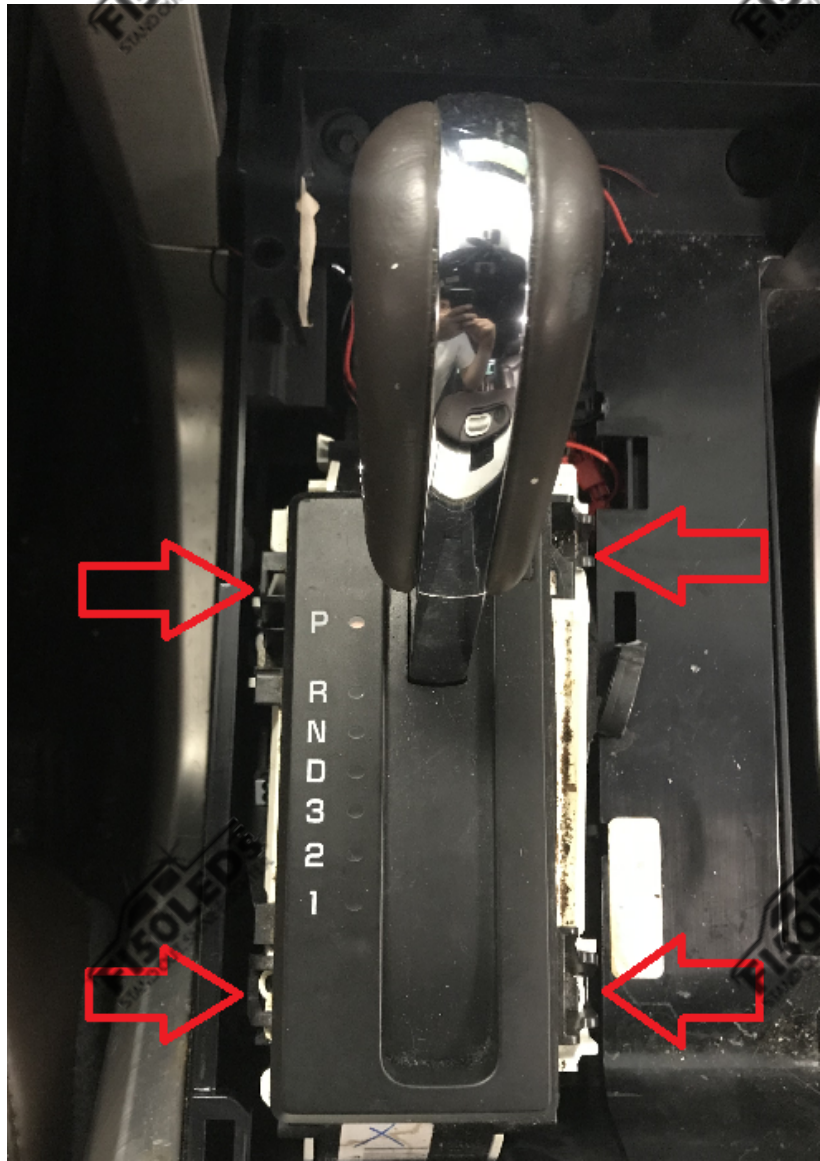


STEP 3

Remove the gear selector sockets. The gear selector sockets are located under the gear selector piece.

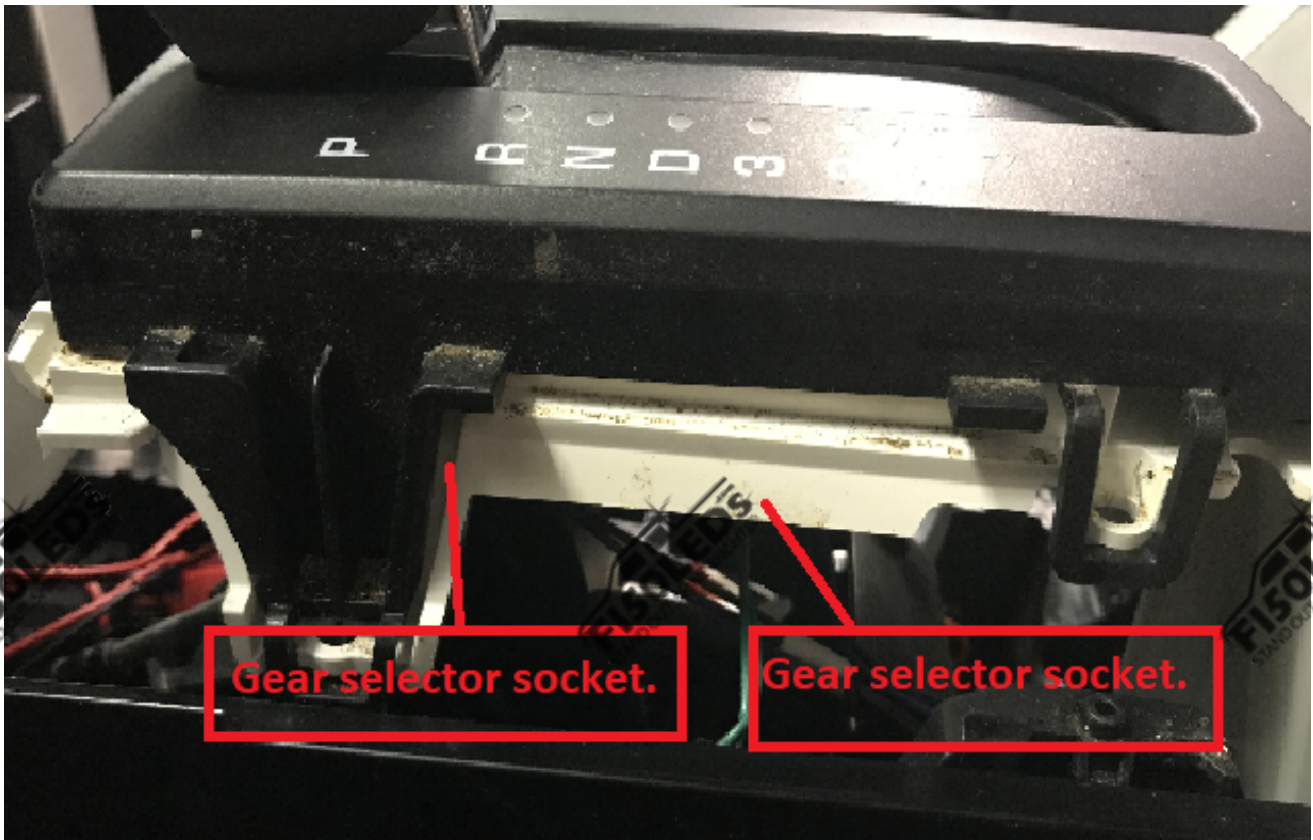

Give the socket a counter clockwise turn to expose the bulb. *(Some trucks need to be turned clockwise to expose the bulb).*

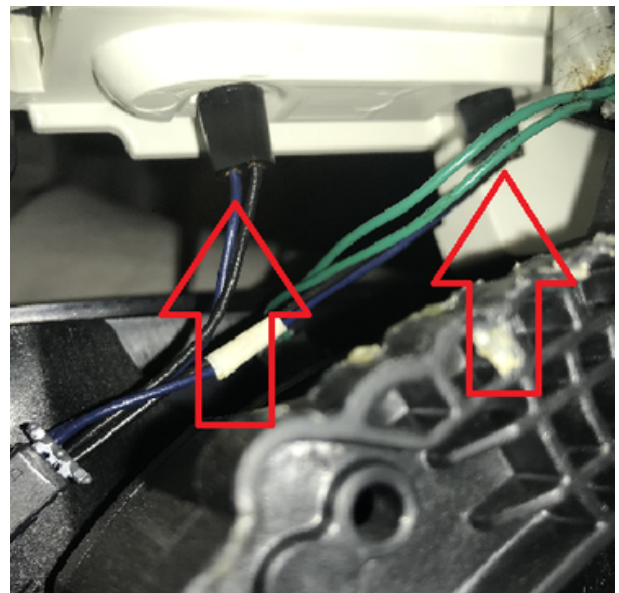


STEP 4

Carefully remove the OEM bulb from the socket. Be careful as these bulbs can be hot if the bulb was on before it is being removed, also be careful not to apply too much pressure to the glass bulb or it may break.

STEP 5

Once the oem bulbs are removed insert your LED Gear Selector lights into the sockets.

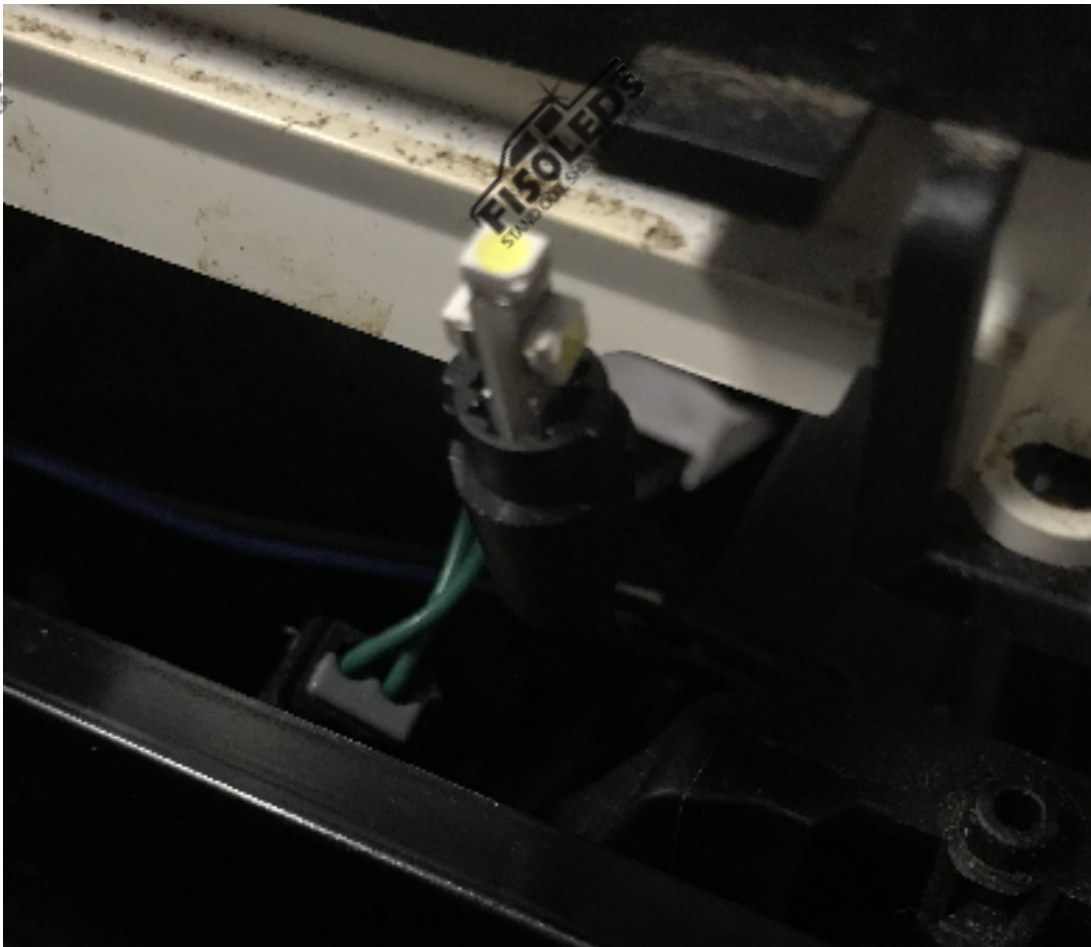



STEP 6

Test your Gear Selector lights before reinstalling as these bulbs are polar sensitive. If the bulb does not light, remove the bulb, rotate it 180 degrees then reinstall this bulb.

STEP 7

Once the bulbs are installed and lighting up reinstall the sockets into place and put your trim piece back into place.



Text for support: 706-214-2618

Visit our site to chat: www.F150LEDs.com

or email CustomerSupport@F150LEDs.com

