



ELSOLED'S

2015-2020 F150 PREMIUM DASH SWITCH INSTALL

STEP 1

Pull back on the plastic trim piece below the steering wheel by grabbing the top of the trim piece and pulling away from the truck. This will release a few taps that are holding the trim piece into place.




RISOLEOS

e Isole Os

I SOLEOS

rigoteos

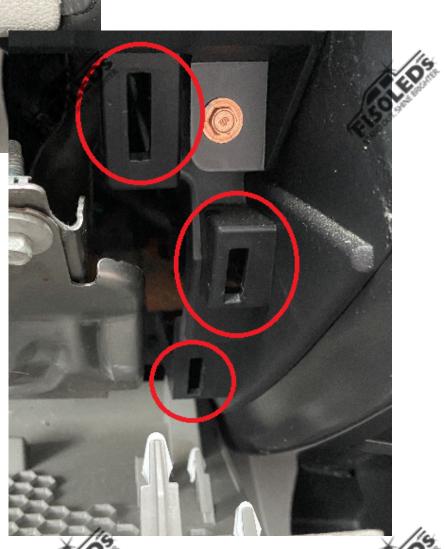

ROLLOS

TI TO LED S





ELSOLEOS

Locate where you would like to drill a hole for the switch. When finding a good location, be sure that when you drill through the plastic trim piece the drill bit will not hit the plastic tabs that secure the trim piece to the truck. Also, be sure when choosing this location that the back of the switch will not hinder the trim piece from going back into place.

*Below is where we choose to drill the hole



RISOLEOS

e Isoleos

STEP 3

Using a size 7/8 (22mm) drill bit, drill a hole straight through the plastic trim piece.







risole05

STEP 4

Before passing the connection end of the switch through the hole, untwist the lock ring from the base of the switch and remove it from the switch. Then pas the connection end of the switch through the hole and slide the lock ring back on.

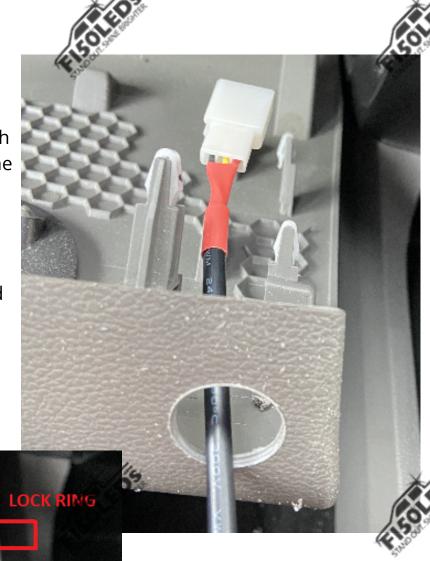

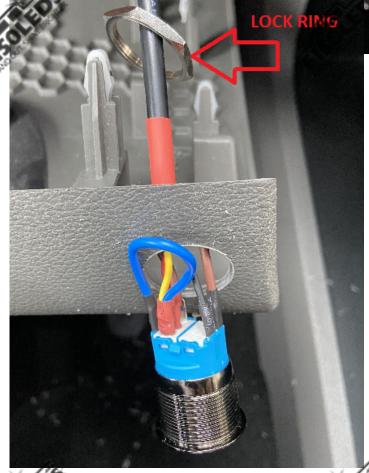

risole05

STEP 5

Slide the switch into the hole then secure it into place by tightening the lock ring on the back of the switch.



STEP 6

Take the two longer wires and tuck them under the plastic trim then run them across the back of the truck to the passenger side.



alsoluto's







Then secure the wires in the driver footwell area using the included zip





Soleds

e Isole Os

1501105





E POLEOS

Line up the tabs on the trim piece to the openings and click the plastic trim piece back into place using moderate force.



risoleos

e Isole Os

1501105

e Poleos



e Isolie OS

COLLO



Text for support: 706-214-2618
Visit our site to chat: www.F150LEDs.com
or email CustomerSupport@F150LEDs.com



ELSOLEOS