2023 FORD F-250 TAILLIGHT BULB INSTALL GUIDE

STEP 1

Be sure that there is no power going to your Reverse lights.

Remove two size 8mm bolts from your truck.

There are two tabs located at the top and bottom of the side of your housing.

Pull away from the side of your truck with moderate force to release these tabs







FISOLEDS Remove your Taillight sockets from the housing using a clockwise turn.

the taillight bulbs are the top and bottom sockets in the housing







carefully remove the OEM glass bulb by pulling away from the base of the bulb.

Make sure this bulb is not hot when removing the bulb



EISOLEDS









FISOLEDS

FISOLEDS

Insert your F150LEDS Taillight bulb.

Test your bulb, if the bulb does not light then remove the bulb and rotate it 180 degrees.



COLEDS

GOLEDS

COLEDS





STEP 6

Use the included self-tapping screw to mount the included resistors (two per side)










Use the included T-Taps to splice the two wires coming from the resistors to the two outer wires of the taillight socket (each bulb will need its own resistor)

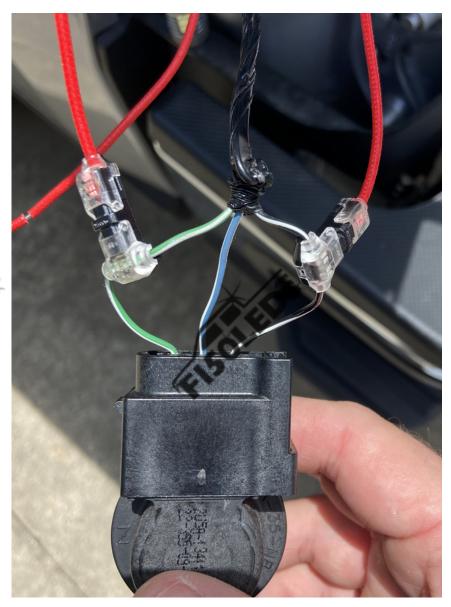

EISOLEDS

Repeat this step for the three other bulbs.









FISOLEDS

e turn to lock it

Reinsert the bulb back into the housing using a clockwise turn to lock it into place then reinstall your taillight assembly.

EISOLEDS







Text for support: 706-214-2618

Visit our site to chat: www.F150LEDs.com
or email CustomerSupport@F150LEDs.com

