
RISOLEOS



ELIZOTE DE

## 2011-2016 SUPER DUTY MKII FRONT TURN SIGNAL KIT INSTALLATION

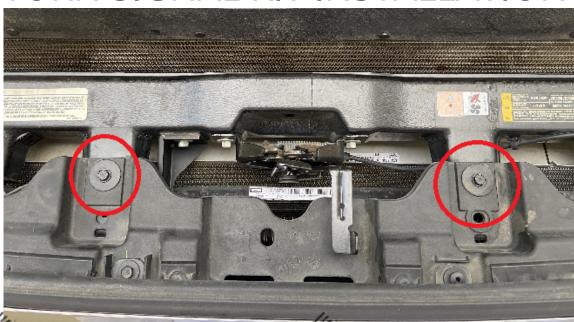

## STEP 1

Remove four size 10mm size bolts on the top of the grille. Then you will be able to pull back on the top of the grille.



e isole Os

E ISOLEOS







Pull back on the top of the grille and look down behind it and there are about 4-5 tabs at the bottom of the grille. Take a long flat head screwdriver to push down on the tabs and they will release allowing the grille to be removed. Place the grille on a surface that it will not get scratched.



risole05

EL COLLEGE


HISOLED'S








Remove four size 10mm bolts to be able to release the headlight assembly. One bolt is located at the top of the housing, two are located behind the rubber covering on the inside of the headlight and the last one is located under the headlight assembly that is in between the bumper and headlight assembly.

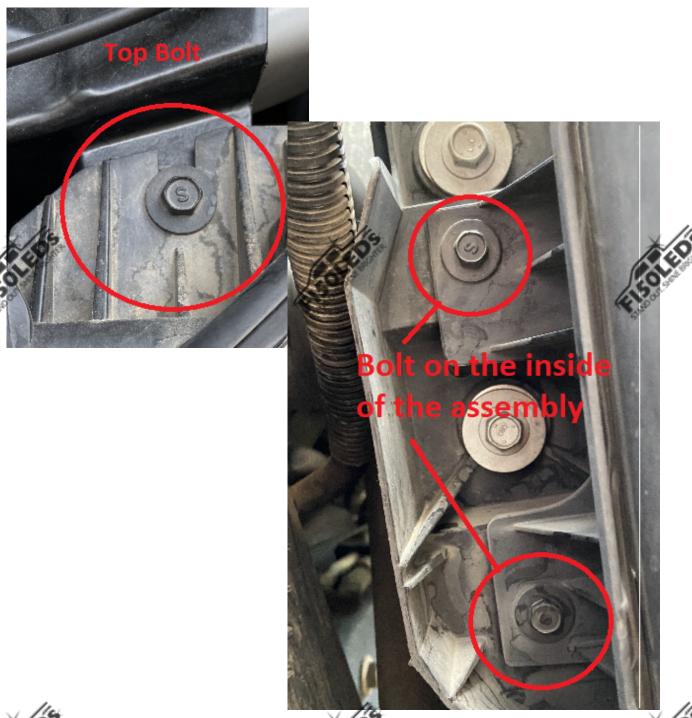

e isole Os

ELEO S

e Poleos

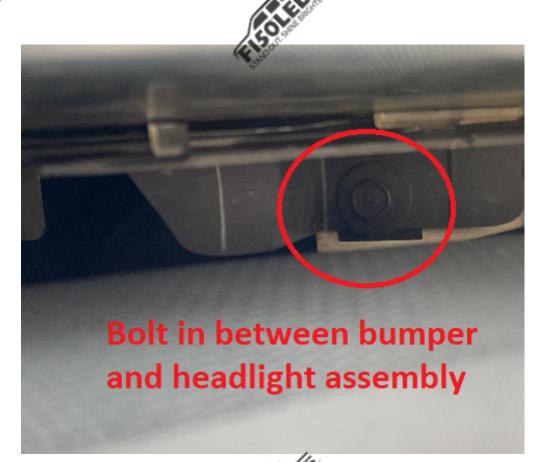

STEP 4

Pull the Headlight assembly away from the truck and it will expose the turn signal socket.



ELSOLEOS







Turn the socket counterclockwise to expose the bulb, remove the stock bulb (be careful as this bulb may be hot) Then insert the MKII Front Turn signal bulb into the socket (test the bulb and if it does not light rotate it 180 degrees then reinsert it. If you experience hyper flashing when testing the bulb, install the included resistor units by splicing the resistors to the two outside wires of the turn signal socket using the provided connectors.



e isole Os



a ko ko s

ELISOTED S

Repeat steps 3-5 on the other side of the truck

## STEP 7

Reinsert the socket into the headlight assembly and lock it in using a clockwise turn. Now put the headlight assembly back into place and secure the assembly to the truck using the four bolts that were removed then reinstall the grille.





Text for support: 706-214-2618
Visit our site to chat: www.F150LEDs.com
or email CustomerSupport@F150LEDs.com



