



SUPER DUTY VOLTAGE CONTROL UNIT

STEP 1

Connect your Headlight bulb to the ballast.



STEP 2


Connect your Voltage control unit to the headlight ballast.





STEP 3

Connect the open end of the Voltage control unit to your factory headlight harness.

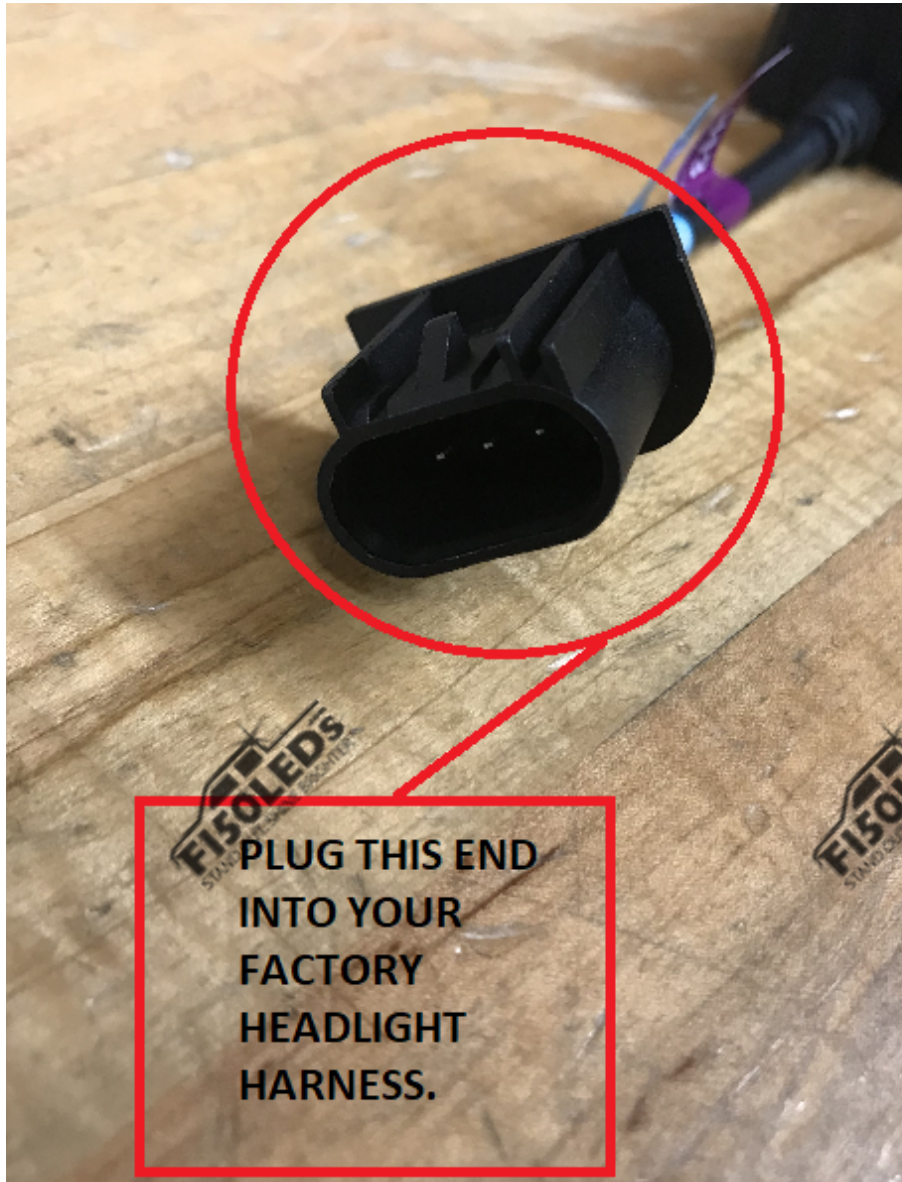

PLUG THIS END
INTO YOUR
FACTORY
HEADLIGHT
HARNESS.



Text for support: 706-214-2618

Visit our site to chat: www.F150LEDs.com
or email CustomerSupport@F150LEDs.com

