

F250 FRONT BLINKER INSTALLATION.

STEP 1

Remove the plastic dust cover.

There are 15 pop up tabs that need to be removed so you can remove the dust cover.




Use a pry tool or a small flat head screwdriver to pop up the tab. Once the tab is popped up you can remove this piece.



STEP 2


Remove your grille from your truck.

To remove your grille, there are 8 size 10MM bolts that need to be removed from the top of the grille.

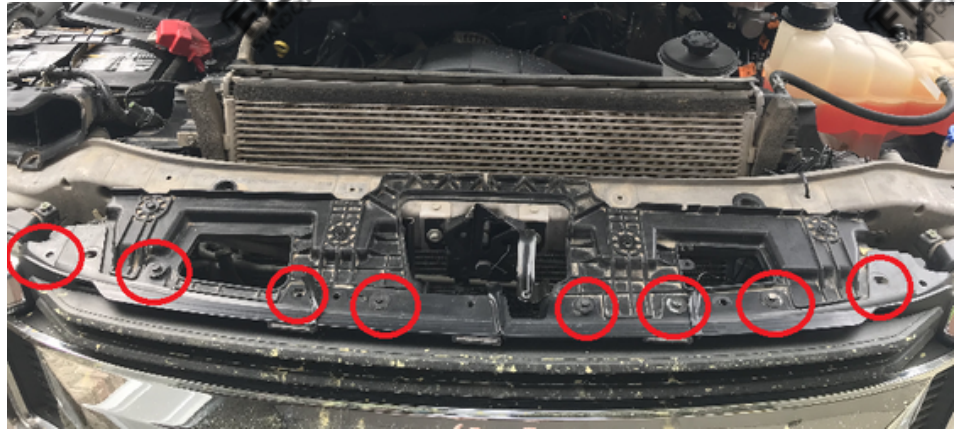




Once these bolts are removed there are two alligator tabs on each side of your grille located behind the black plastic circled below. There are also metal tabs along the bottom of your grille. These tabs are holding your grille in place.

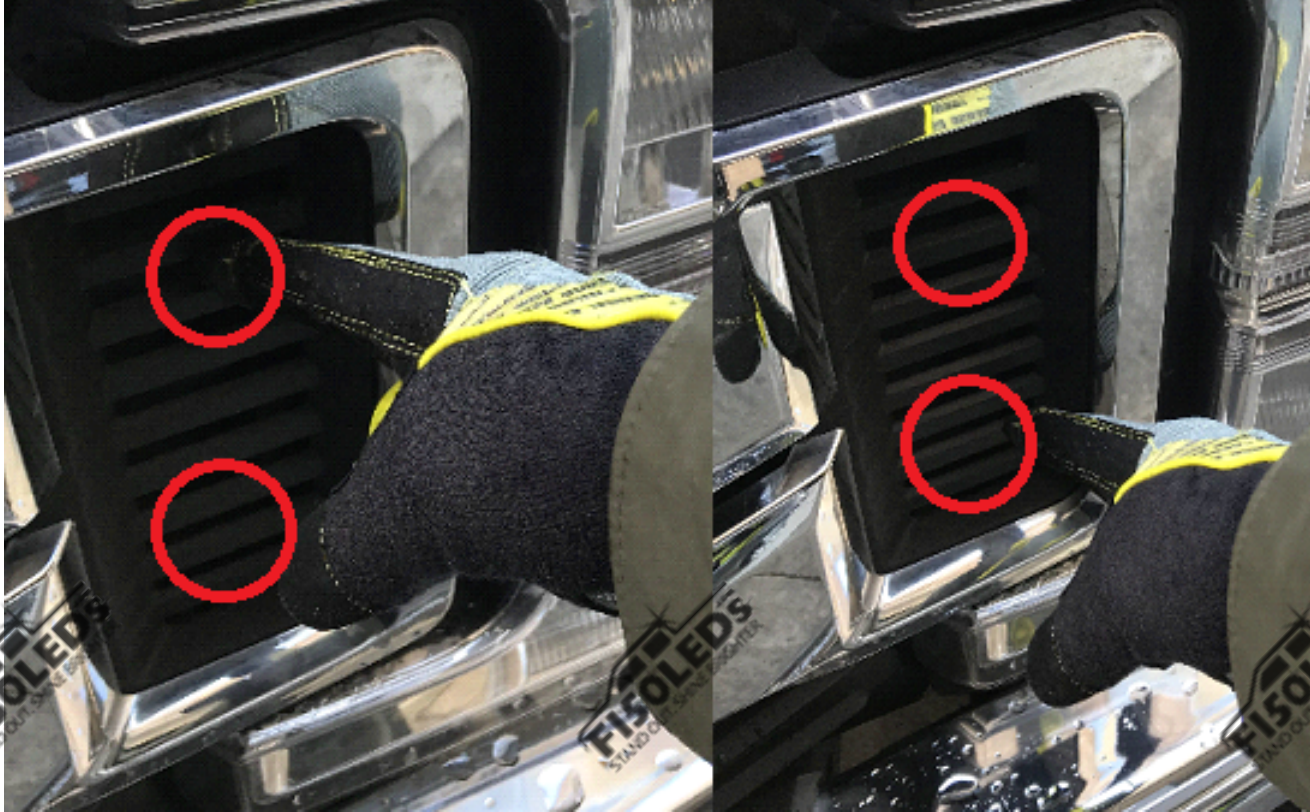

Using force pull your grille away from your truck. Pull from your drivers side then pull from your passenger side to release these tabs. Below are what the tabs look like after you pull your grille away from the truck.



Once your grille is removed, we recommend laying your grille on a blanket or a surface that will not scratch your grille.

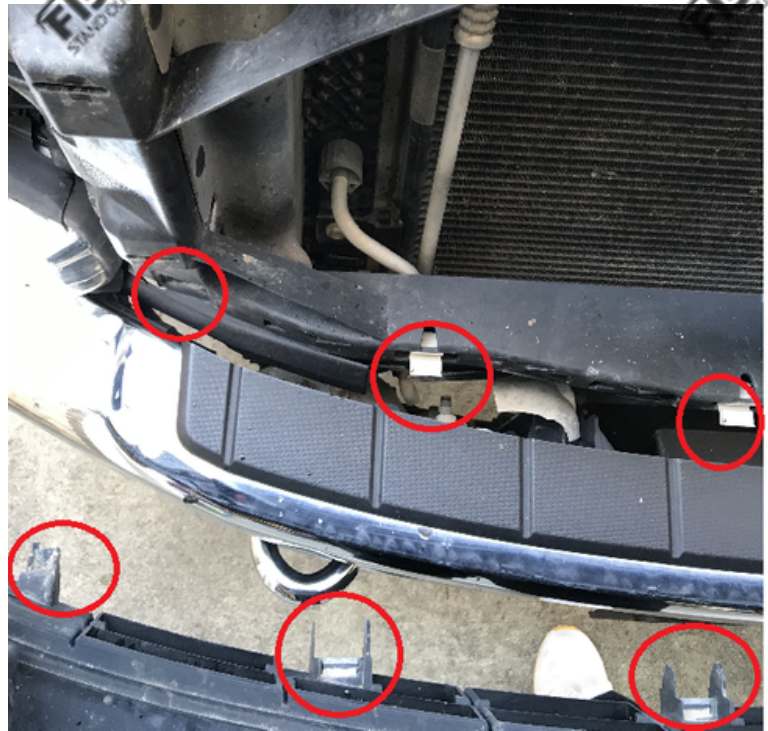

STEP 3

Remove four size 10MM bolts that are securing the headlight assembly to your truck.

Two of them are located on the inside of the headlight assembly.





One is located on the top of the headlight assembly.



One is located under the rubber seal under your headlight assembly.



Once these bolts are removed carefully pull your headlight assembly away from your truck. With some moderate force and some finesse, the assembly should come right out exposing your Front Blinker socket.





STEP 4

Remove your Front Blinker socket from the housing using a counterclockwise turn.

Carefully remove the OEM glass bulb by pulling away from the base of the bulb.



Make sure this bulb is not hot and that no power is going to the bulb



Insert your F150LEDs Turn Signal Bulb.

Test your bulb, if the bulb does not light then remove the bulb and rotate it 180 degrees.

**It is normal to experience hyper-flashing at this point as we are just testing to make sure that the bulb lights up. **



STEP 5



Use your provided screws to mount the included resistors to the metal surface behind the housing.

You may need to drill a pilot hole using a 3/16 size drill bit so that the screws will mount easier.





Once you have mounted your resistor. Use the provided quick splice connectors to splice into the two outside wires of your front turn signal socket.

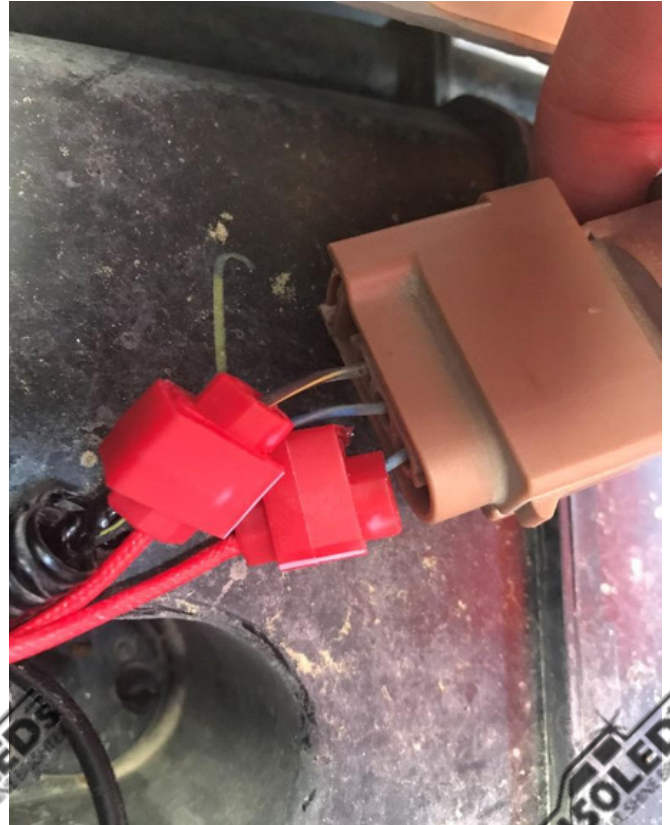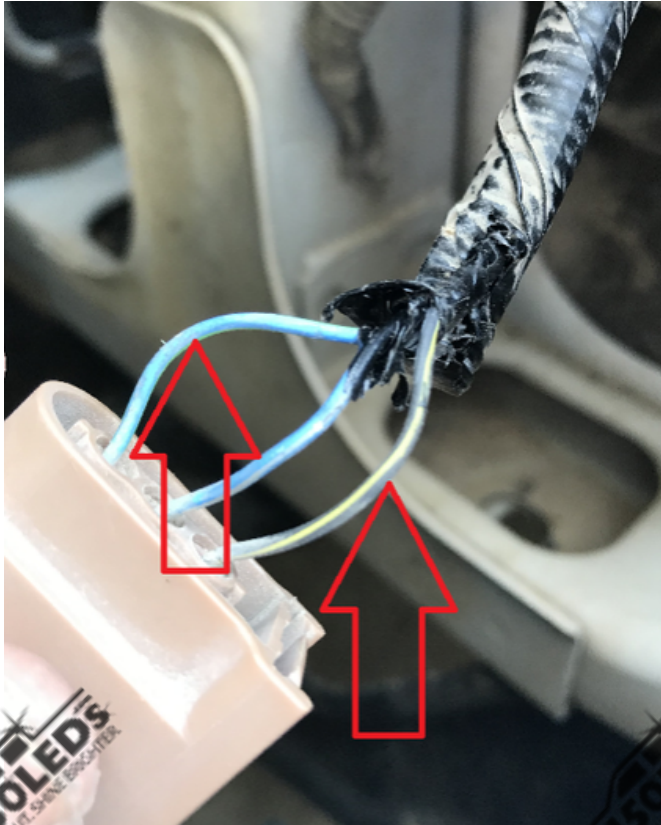

STEP 6

Reinstall your Front Turn signal bulb into your headlight assembly and reinstall your headlight assembly into your truck!

To see the complete installation watch our video at www.F150LEDs.com!



Text for support: 706-214-2618

Visit our site to chat: www.F150LEDs.com
or email CustomerSupport@F150LEDs.com

