

F250 2017+ FRONT MARKER INSTALLATION

STEP 1

There are 15 pop up tabs that need to be removed so you can remove the dust cover.

Use a pry tool or a small flat head screw driver to pop up the tab. Once the tab is popped up you can remove this piece.

Once you have removed all of your pop up tabs, remove your plastic dust cover.







STEP 2

Remove your grille from your truck. To remove your grille, there are 8 size 10MM bolts that need to be removed from the top of the grille.

Once these bolts are removed there are two metal tabs on each side of your grille and metal tabs along the bottom of your grille that are holding your grille in place.


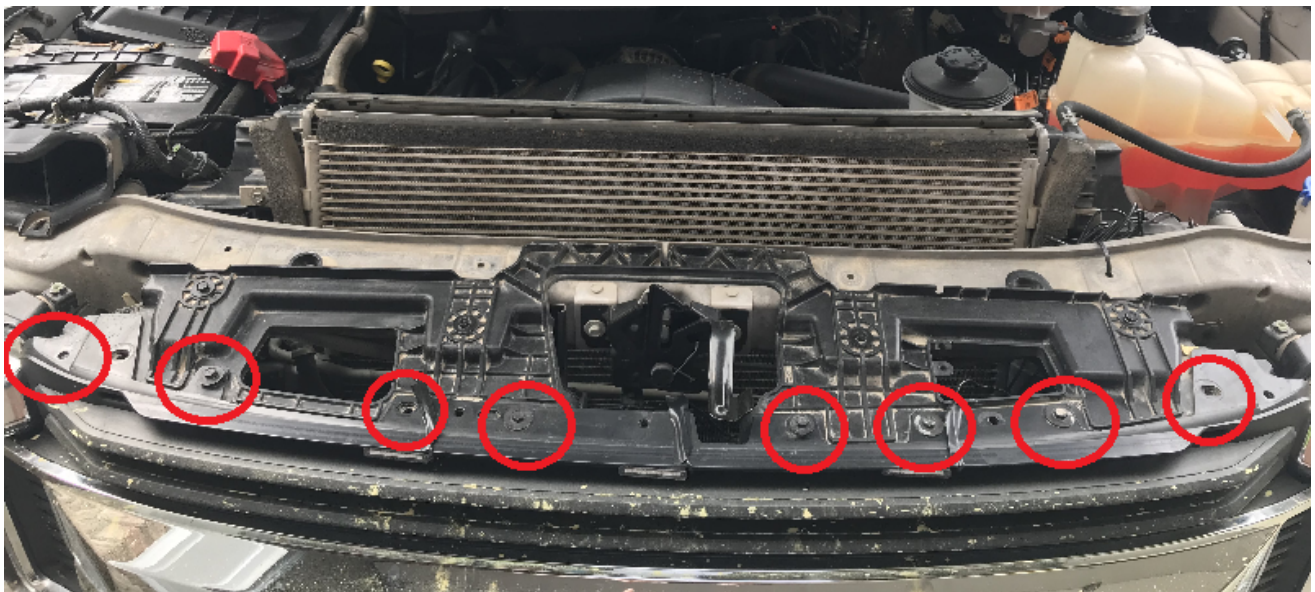






Once these bolts are removed there are two metal tabs on each side of your grille and metal tabs along the bottom of your grille that are holding your grille in place.

Using force pull your grille away from your truck.

Once your grille is removed, we recommend laying your grille on a blanket or a surface that will not scratch your grille.

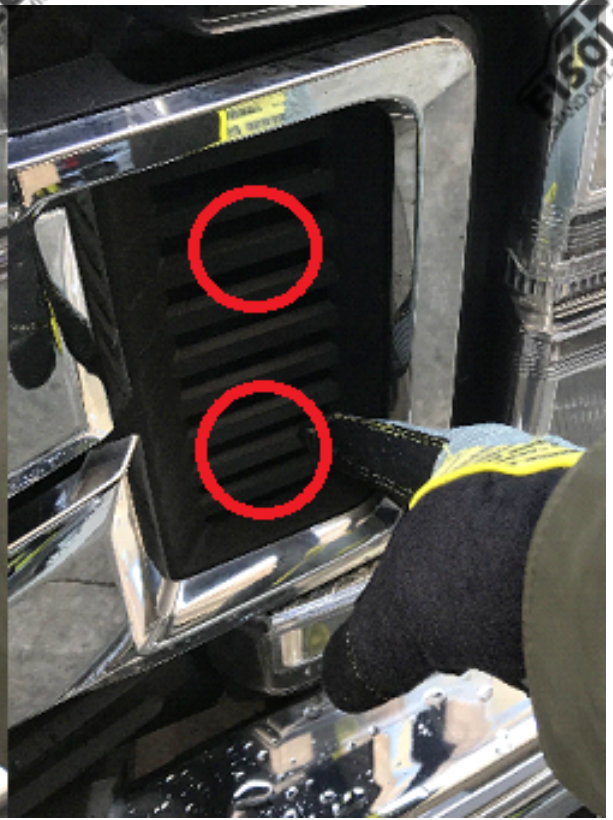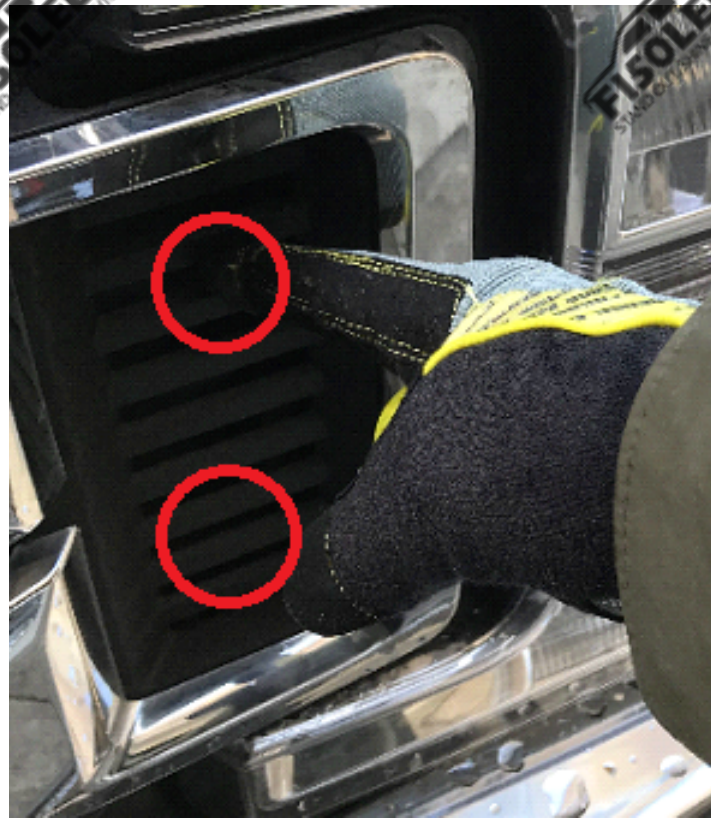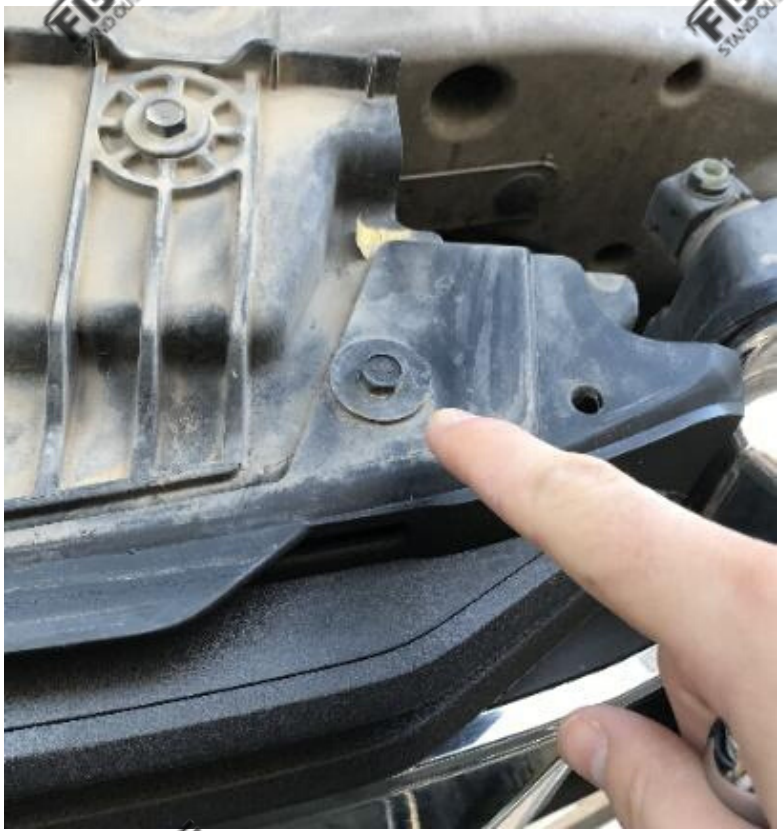


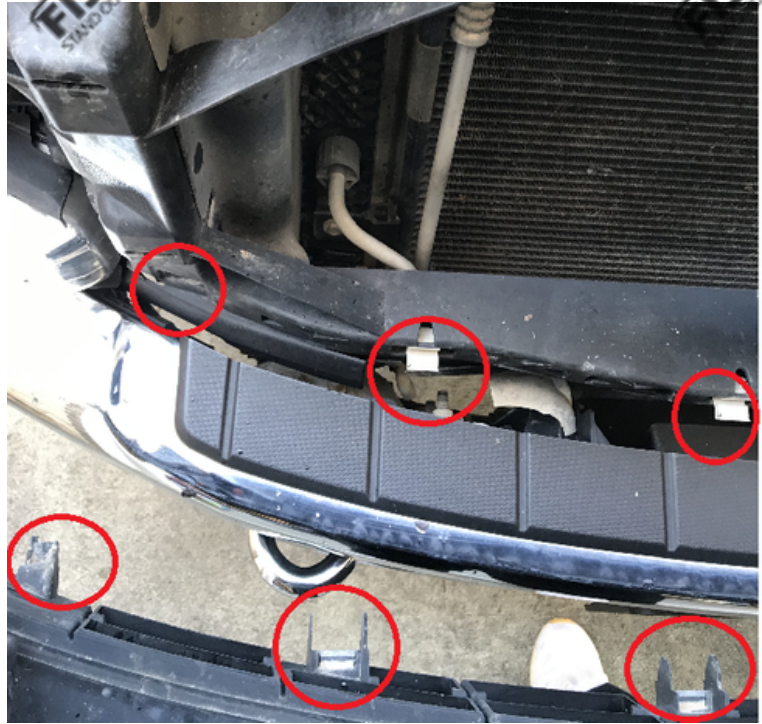

STEP 3


Remove four size 10MM bolts that are securing the headlight assembly to your truck. Two of them are located on the inside of the headlight assembly.

One is located on the top of the headlight assembly.

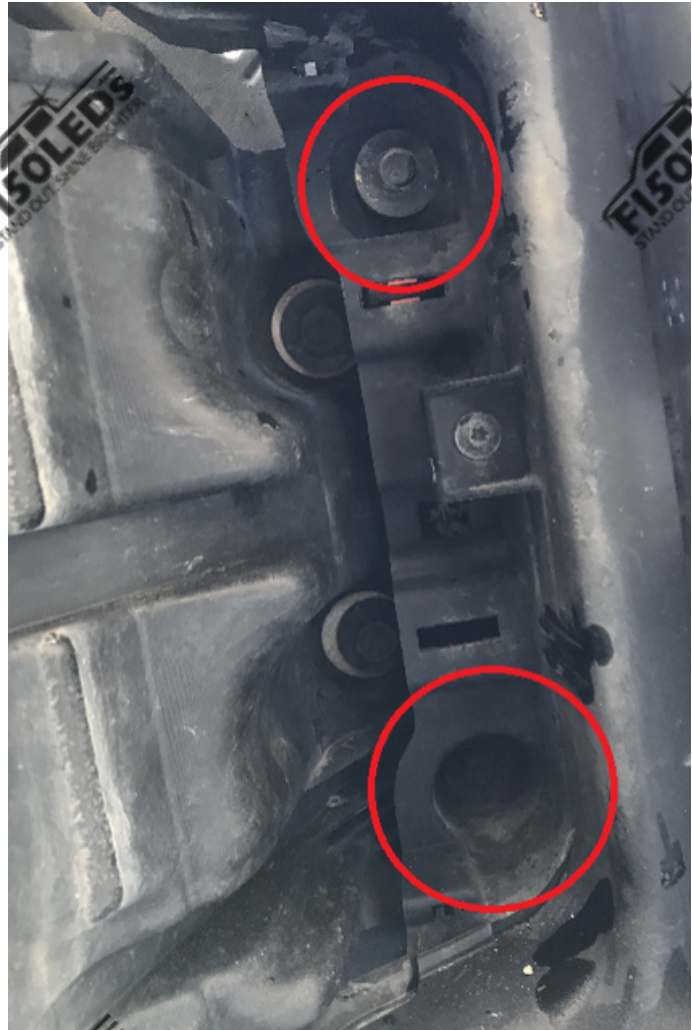

One is located under the rubber seal under your headlight assembly.

Once these bolts are removed carefully pull your headlight assembly away from your truck.

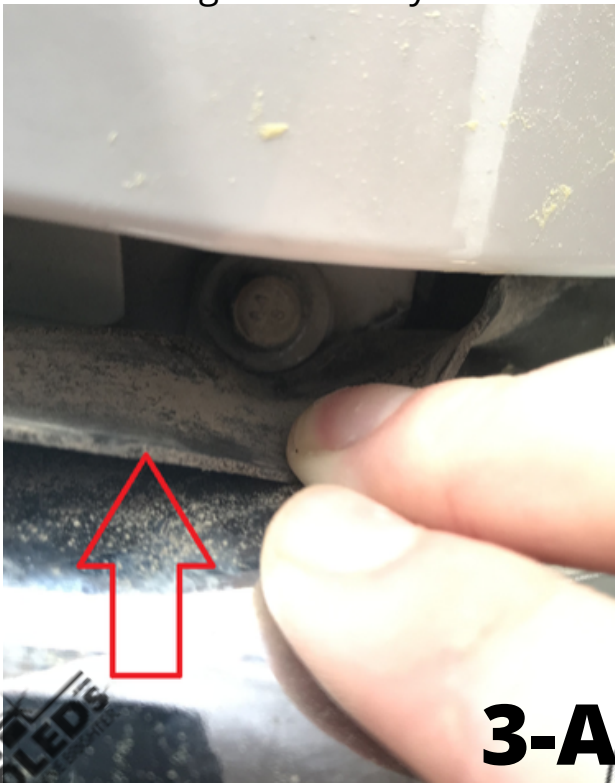


3-A



3-B

Once you have removed your assembly, disconnect the factory harness from your front marker bulb.

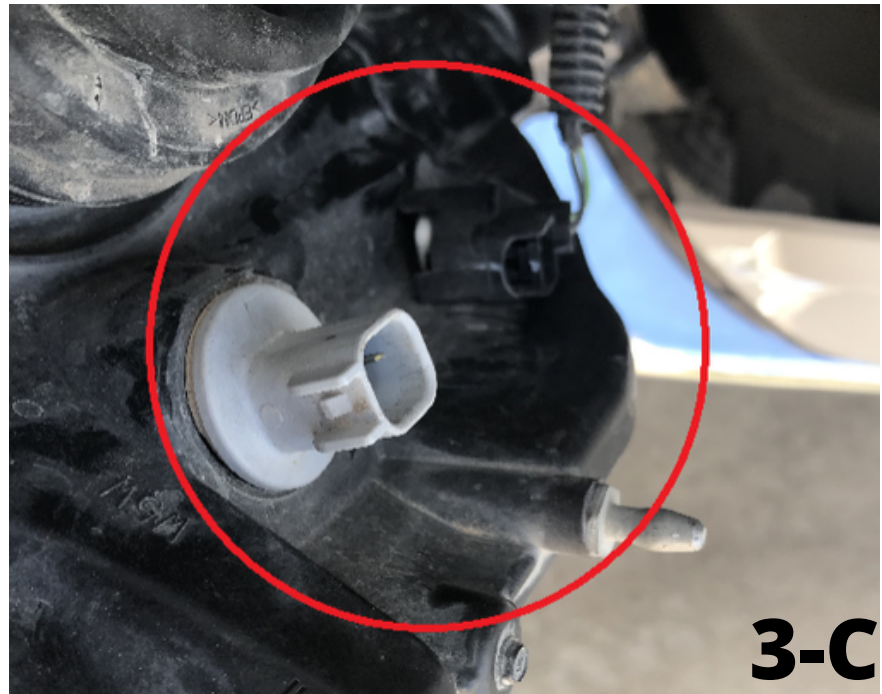

3-C



Give the marker light a counterclockwise turn to expose your front marker bulb.

Be sure that this bulb is not hot before trying to remove it. Gently pull away from the base of the bulb to remove the OEM bulb. Use caution removing this glass bulb.



3-D



3-E

Install your F150LEDs.com Front Marker bulb. Test this bulb and if it does not light remove it and rotate 180 degrees as these bulbs are polar sensitive!

Reinstall your front marker into your headlight housing and reinstall your headlight housing!



Text for support: 706-214-2618
 Visit our site to chat: www.F150LEDs.com
 or email CustomerSupport@F150LEDs.com

