

F250 2017+ GAS FRONT MARKER INSTALLATION

STEP 1

There are 15 pop up tabs that need to be removed so you can remove the dust cover.

Use a pry tool or a small flat head screw driver to pop up the tab. Once the tab is popped up you can remove this piece.

Once you have removed all of your pop up tabs, remove your plastic dust cover.






STEP 2

Remove air intake on passenger side.

To remove this air intake there are two tabs that need to be pushed inward.


Once you press these tabs inward the air intake will release and you will be able to pull it right out

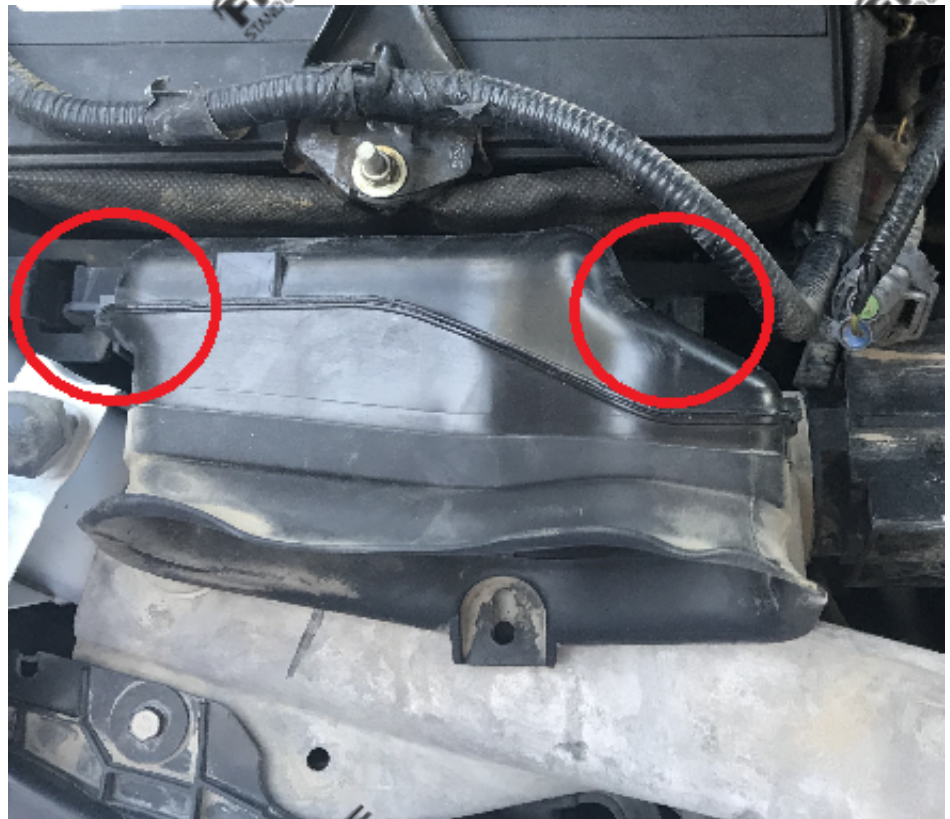



STEP 3

Remove your OEM Front Marker Bulb and replace it with the F150LEDs.com Front marker bulb.





To remove your bulb, reach behind your headlight assembly, locate your Front marker light, and give the marker light a counterclockwise turn to expose your front marker bulb.





Be sure that this bulb is not hot before trying to remove it.

Gently pull away from the base of the bulb to remove the oem bulb.

Use caution removing this glass bulb.



Install your F150LEDs.com Front Marker bulb.

Test this bulb and if it does not light remove it and rotate 180 degrees as these bulbs are polar sensitive!

Reinstall your front marker into your headlight housing and reinstall your headlight housing!



Text for support: 706-214-2618

Visit our site to chat: www.F150LEDs.com
or email CustomerSupport@F150LEDs.com

