



2019 - 2022 RANGER FRONT MARKER INSTALL GUIDE

STEP 1

Remove the Front marker housing from the truck. To do so there is a small plastic clip on the back of the housing that needs to be pushed in to release the housing.

To push in this clip and release the housing, reach behind the housing and press the clip in, then the housing should come free.


It is helpful to pull the wheel well liner back so that it is easier to see behind the housing and find the clip





Push
Wheel well
Liner this way

Push the tab in the
photo below up to
release it from the
housing.

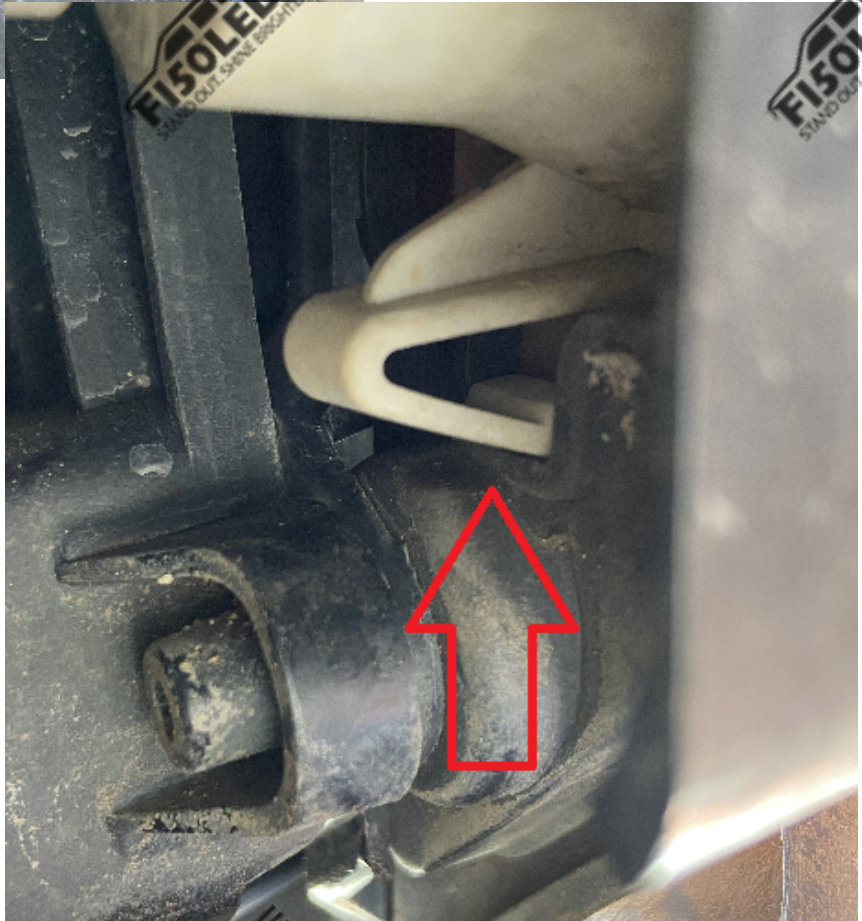

STEP 2

Once the housing is released
turn the socket
counterclockwise to expose
the front marker bulb.



STEP 3

Remove the stock bulb (be careful as this bulb may be hot) Then insert the MKII Front Marker bulb into the socket (test the bulb and if it does not light rotate it 180 degrees then reinsert it).





STEP 4

Reinsert the socket into the front marker assembly and lock it in using a clockwise turn.

Then reinsert the assembly by lining up the clip and push it into place. You should hear a click when it is fully reinstalled.



Text for support: 706-214-2618

Visit our site to chat: www.F150LEDs.com
or email CustomerSupport@F150LEDs.com

