

2019 - 2022 RANGER REAR TURN SIGNAL INSTALL GUIDE

STEP 1

Be sure that there is no power going to your Turn signal lights.

Remove two size 8mm bolts from your truck.

There are two tabs located at the top and bottom of the side of your housing.

Pull away from the side of your truck with moderate force to release these tabs



STEP 2

Remove your Turn signal light socket from the housing using a clockwise turn.

The turn signal bulb is the middle bulb in the housing



STEP 3

Carefully remove the OEM glass bulb by pulling away from the base of the bulb.

Make sure this bulb is not hot when removing the bulb



STEP 4

Insert your F150LEDs.com cargo light bulb.

Test your bulb, if the bulb does not light remove the bulb and flip it 180 degrees.



STEP 5

Reinsert the bulb back into the housing using a clockwise turn to lock it into place.

STEP 6

Use the provided screws to mount the included resistors to the metal surface behind the housing. (One resistor per bulb)

You may need to drill a pilot hole using a 3/16 size drill bit so that the screws will mount easier.


****As you are about to drill your hole make sure you are not about to drill into your bed area. ****






STEP 7

Using the provided splice connectors, splice each wire from one resistor to the two outside wires of the turn signal bulb.

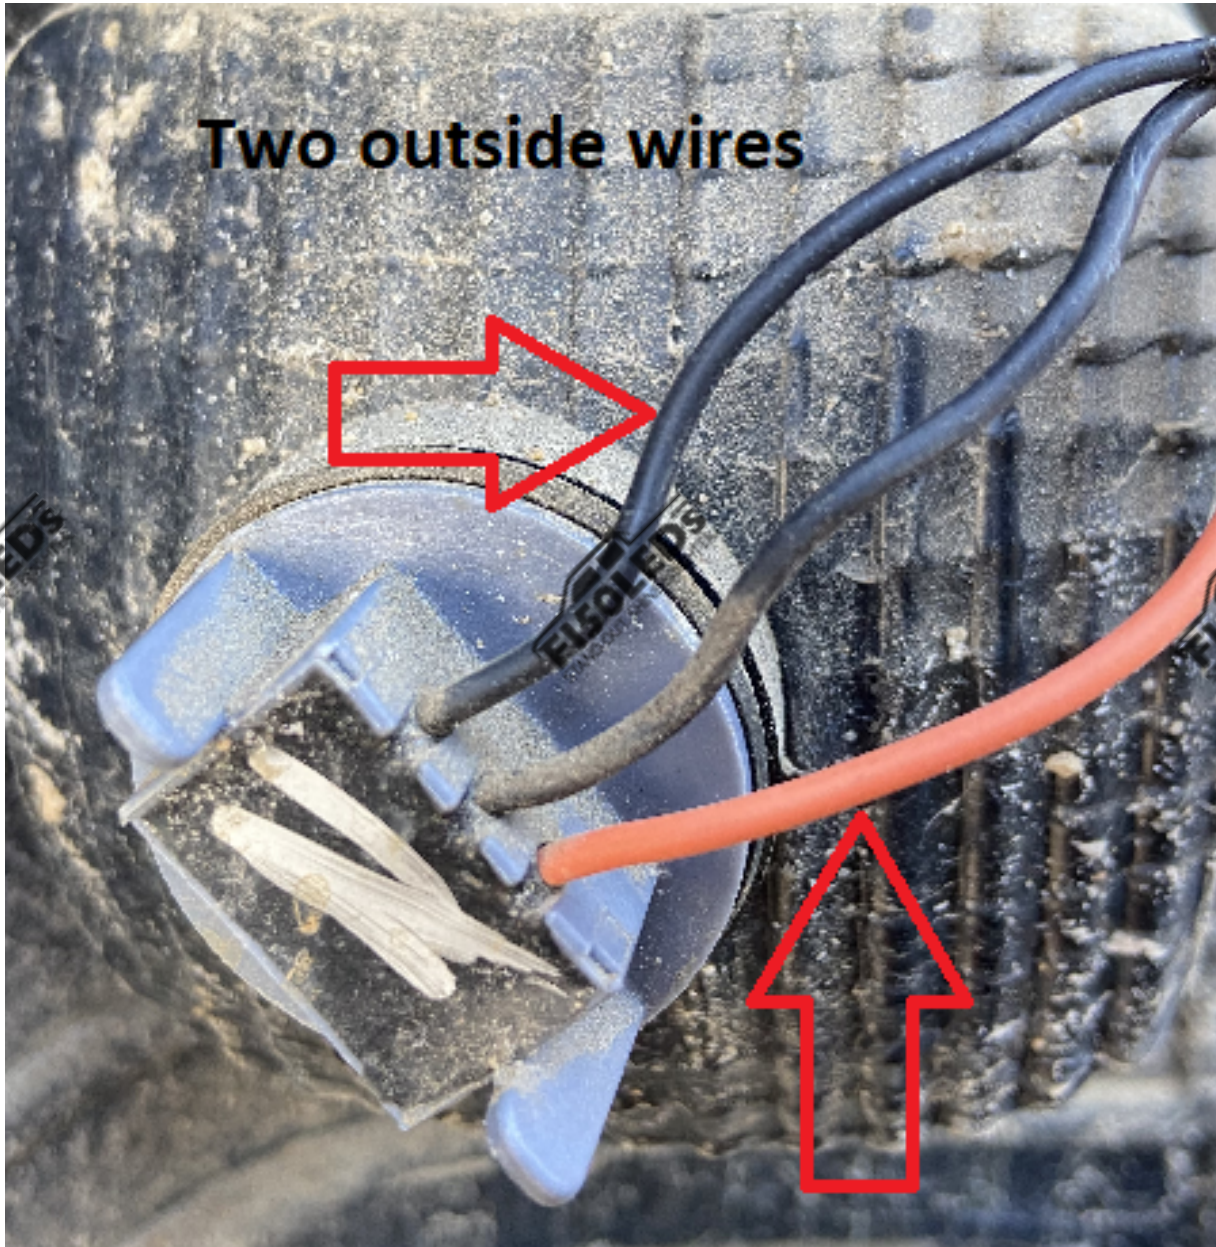

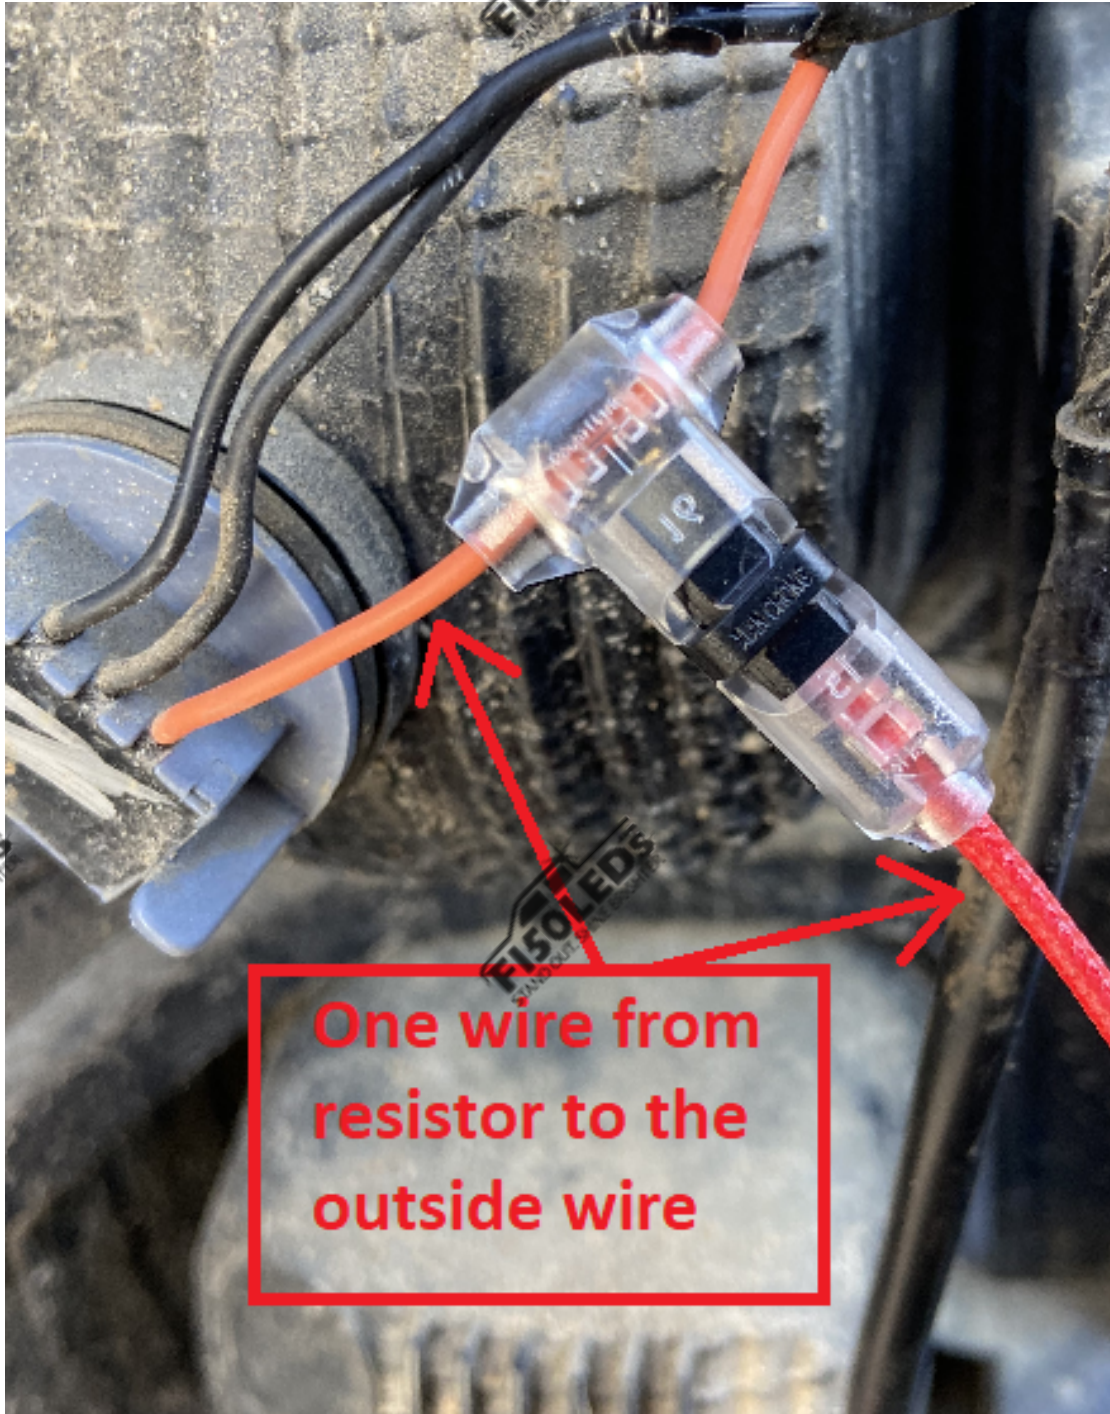


One wire from resistor to the outside wire





After making the connections test that they are secure by turning the truck on then turning on the blinker, if the blinker hyper-flashes there may not be a solid connection, if the blinker does not hyper-flash the connection is good

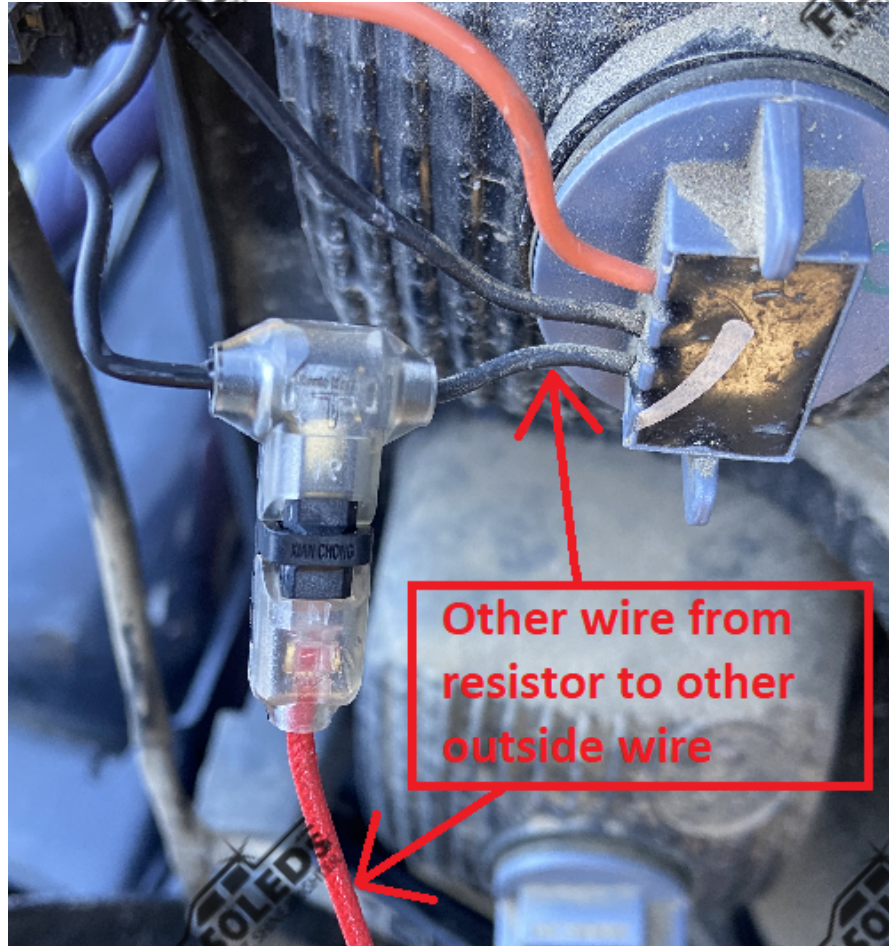

STEP 8

Reinstall the Taillight assembly.



Text for support: 706-214-2618

Visit our site to chat: www.F150LEDs.com
or email CustomerSupport@F150LEDs.com

