


STEP 1

Once you are ready to install the security bolts, hand tighten the security bolts to the bar, using the included locke washer and washer.





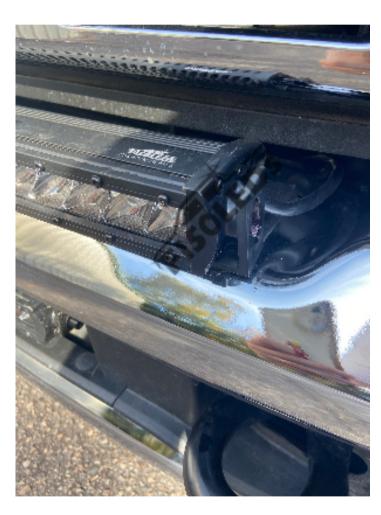










STEP 2

Next take the included security bolt key and use either a 5/16 allen wrench or a 13mm wrench, tighten the bolt to the bar.

FISOLEDS

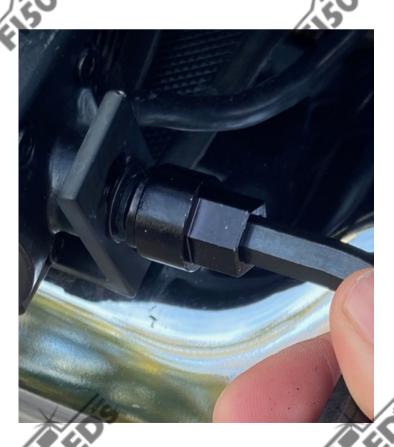











Text for support: 706-214-2618
Visit our site to chat: www.F150LEDs.com
or email CustomerSupport@F150LEDs.com