



Highlite Aluminium Black Bollard Light

Name	Highlite
Material	Aluminium
Colour	Poly Powder Coated Black
IP Rating	IP65
Colour Temp	3000k 4000k 5500k
IK Rating	IK08
Installation Type	Ground - Surface Mounted
Diffuser Type	Frosted Perspex
Lamp Base	Built in LED
Max Wattage	9w-12w - Selectable by Switch
Protection Class	240v - 1 (Earth Required) 12v DC - 3 (Low Voltage - No Earth Required)
Cable Length	2000mm
Lamp Expectancy	<30,000hrs*
CRI	CRI>80
SDCM	<6
UGR	<17
Dimmable	No
Warranty	3 Years Replacement*




Warranty
Terms & Conditions



Website

Product Ordering

Image	Part Number	Colour Temp	Lumens	Input Voltage	Beam Angle	Included LED	Barcode
	HV1622T-BLK-240V	3000K 4000K 5500K	860lm 920lm 970lm	240v	120°	TRI Colour 9W-12w Built in LED	9350418010506
	HV1622T-BLK-12V			12v DC		TRI Colour 9w-12w Built in LED	9350418010490

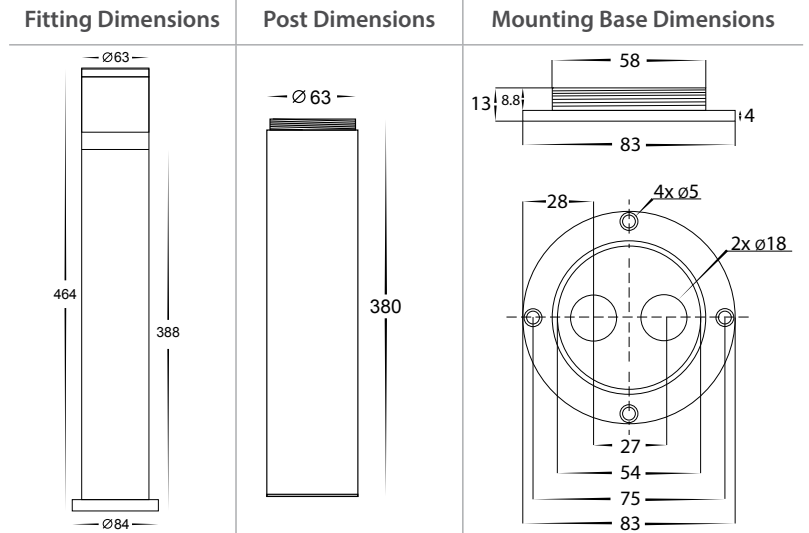

Optional Havit Compatible Accessories

Image	Part Number	Description
Extension Post , Spike + Drivers		
	HV1622-BLK-EXT	Extension Post to Suit Max 2 can be Used
	HV1607	Spike to suit for Inground Installation
	12v DC Non Dimmable LED Drivers	See Catalogue or Website for full range of Non Dimmable 12v DC LED Drivers
Dali Relay Modules		
	HV9107-2701S-N	Dali On-Off Relay Module to be used with Non Dimmable LED Drivers when Dali Control is required

Related Products

[HV1625T-BLK](#)



[HV1626T-BLK](#)



Havit Lighting 143 Beauchamp Road, Matraville, N.S.W. 2036 | Phone: 02 9381 8300 | Fax: 02 9381 6661 | Email: sales@havit.com.au | Web: www.havit.com.au

*See Warranty Terms & Conditions for more Information