


## Divad Aluminium Black

- Square LED Bollard light
- Aluminium Poly Powder Coated Black
- Polycarbonate diffuser
- 600mm and 1000mm height
- IP Rating: IP65
- IK Rating: IK08



HV1629T-BLK-240V-SQ  
HV1629T-BLK-24V-SQ

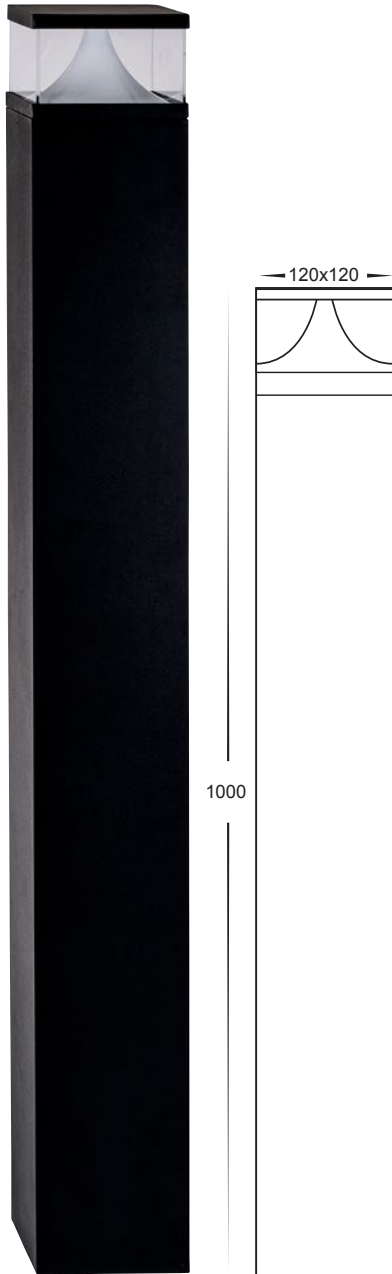

HV1628T-BLK-240V-SQ  
HV1628T-BLK-24V-SQ




IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV1628T-BLK-240V-SQ</b>	3000K	960lm	240v	<b>Tri-Colour</b> Built-in 12w SMD
		4000K	1020lm		
	<b>HV1628T-BLK-24V-SQ</b>	3000K	960lm	24v DC	<b>Tri-Colour</b> Built-in 12w SMD See page 276 for compatible drivers
	<b>HV1629T-BLK-240V-SQ</b>	3000K	960lm	240v	<b>Tri-Colour</b> Built-in 12w SMD
		4000K	1020lm		
	<b>HV1629T-BLK-24V-SQ</b>	3000K	960lm	24v DC	<b>Tri-Colour</b> Built-in 12w SMD See page 276 for compatible drivers
		5500K	1080lm		

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 275 - 282  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362