


Metro 316 Stainless Steel

- Inground uplighter round
- Stainless Steel 316 Marine Grade cover
- Flush tempered glass
- Trafficable to 600Kg
- Face diameter: 120mm
- Installation depth: 155mm
- IK Rating: IK08
- IP Rating: IP65
- **NOTE: Adequate drainage must be allowed**

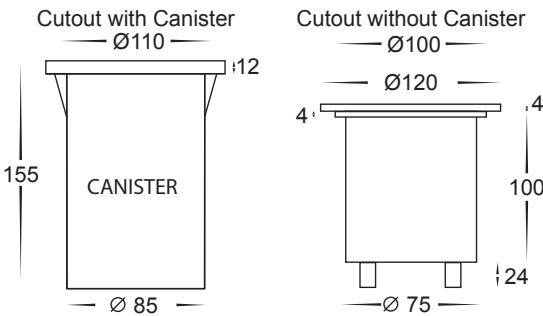

Compatible with
Tri-Colour 9in1
 3w, 5w, 7w
 12v,24v or 240v LED Globe




IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1801T	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	 Tri-Colour 5w MR16 LED See page 275 for compatible drivers
	HV1806T	3000K 4000K 5500K	270lm 285lm 300lm	240v	 Tri-Colour 5w GU10 LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 275 - 282. Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362