




Luta 316 Stainless Steel

- Adjustable square inground uplighter
- Stainless Steel 316 Marine Grade cover
- 30° Tilt
- Trafficable to 500Kg
- Flush Tempered glass
- Face: 108x108mm
- Installation depth needed: 160mm
- IK Rating: IK10
- IP Rating: IP67
- **NOTE: Adequate drainage must be allowed**

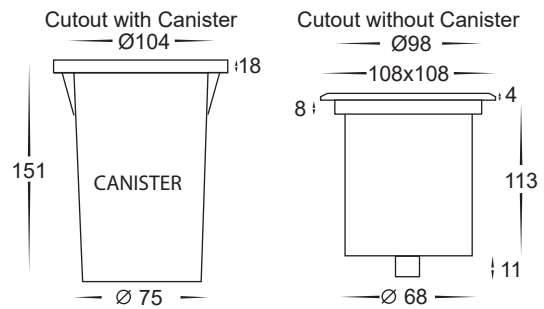

Compatible with
Tri-Colour 9in1
3w, 5w, 7w
12v or 24v LED Globe




IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1825T-SQ	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED See page 275 for compatible drivers

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 275 - 282
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362